
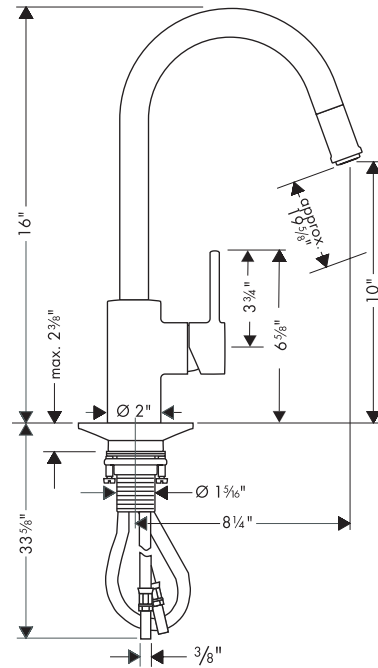


Talis HighArc 1 Spray Pull-Out 06802XX0

Available in Chrome (00), Steel Optik (86)

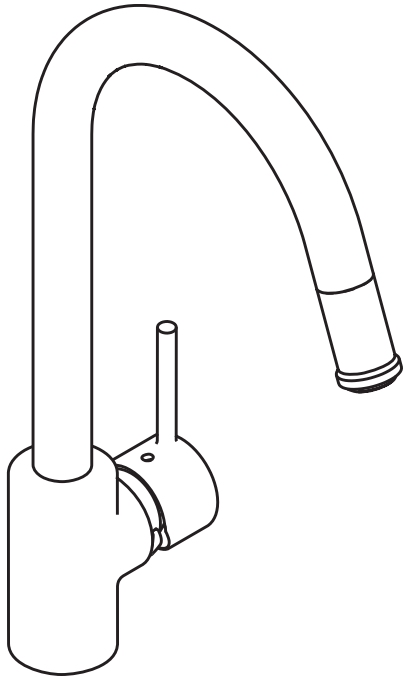

Product Specification

- ADA compliant
- Solid brass body
- Spout swivels 360°
- Ceramic cartridge operation
- Flow rate 2.2 gpm
- Pull-out spray
- Protection against back siphonage provided by check valve in sprayhead
- Hole size in mounting surface 1 1/2"
- Max. mounting surface thickness 2 3/8"
- 3/8" supply hoses – requires 3/8" compression fittings (not included)

hansgrohe

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>