

# COLUMBIA BAY DIRECT VENT GAS STOVE





Shown standard black

An ordinary room becomes an inviting living space with the Columbia Bay from Quadra-Fire. Bay window styling, with your choice of black, gold or satin-nickel trim, adds just the right touch of class. Curl up in front of the fire and let the warmth and glow melt away the hassles of the day. High efficiency and great performance keep your heating bills down. And for even more convenience, add a thermostatic remote control.

The TrueGlow Burner, an exclusive from Quadra-Fire, sets a new standard for realism. The ceramic burner is molded from real wood pieces and coals. Flames rise from gas ports distributed throughout the glowing coal bed and lower logs, producing an incredibly active and varied fire. No need to hide the burner anymore—the TrueGlow burner proudly takes center stage, with an appearance that is phenomenal, whether it's burning or not.



Shown with optional gold door crown and gold rod grille

#### **Standard Features**

- Classic black door
- Black rod grille
- Pedestal
- Bay window styling
- Variable speed blower
- Easy access top mounted controls
- Designer brick pattern firebox
- Durable steel construction
- Bedroom/mobile home approved
- No additional floor protection required
- Limited lifetime warranty

#### **Options**

- Door crown in gold or satin nickel
- Rod grille in gold or satin nickel
- Richly detailed brick interior
- Thermostatic remote controls

Cover photo: Columbia Bay shown with optional satin nickel door crown and satin nickel rod grille




1445 North Highway, Colville, WA 99114 www.quadrafire.com • 800-926-4356

## COLUMBIA BAY



#### **Dimensions**

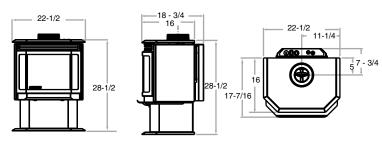

#### Clearances

Α	Side of stove top to side wall6"
Α	In an alcove6-3/4"
В	Rear of control box to back wall2"
C	Flue pipe to back wall6"
D	Flue pipe to side wall14"
Ε	Rear corner of stove top to side wall 2"
F	Min. floor to ceiling height (std. room) 84"
G	Top of stove to alcove ceiling 19"
Н	Maximum alcove depth 36"
1	Minimum alcove width 36"







#### **Technical & Performance Data**

Width	22-1/2"	Flue Size6-5/8"
Height	28-1/2"	Standing Pilot IgnitionYes
Depth	18-3/4"	Mobile Home Approved Yes
Shipping Weight	165 lbs.	Bedroom Approved Yes
Heating Capacity		
Btu/Hour Input NG		21,000 – 30,000
•		24,000 – 30,000
Efficiency** NG		up to 82%
Efficiency** LP		up to 85%
_		160 cfm

The strongest in the industry, Quadra-Fire provides a limited lifetime warranty on gas-burning products for their most important aspects: firebox and heat exchanger.

For full warranty details go to www.quadrafire.com



#### IMPORTANT - READ BEFORE YOU INSTALL!

Refer to the Owner/Installation Manual for complete clearance requirements and specifications. The images and descriptions in this brochure are provided to assist you in product selection only. \*Heating capacity rating is to be used as a guideline only. Actual performance may differ slightly due to climate, building construction and condition, amount and quality of insulation, location of the heater, and air movement in the room.

\*\*Canadian: P.4.1-02 65.42% NG/65.96% LP.

Quadra-Fire is a registered trademark of Hearth & Home Technologies. Product specifications and pricing subject to change without notice. The Quadra-Fire Columbia Bay direct vent gas appliance listed to ANSI standard Z21.88a-2000/CSA 2.33a-M00 Vented Gas Fireplace Heaters and applicable sections of UL307b Gas Burning Heating Appliances for Manufactured Homes and Recreational Vehicles, CAN/CGA 2.17-M91 "Gas Fired Appliances for Use at High Altitude," by OMNI-Test Laboratories, Inc., Beaverton, OR.

### Available From:

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com