

### Overview

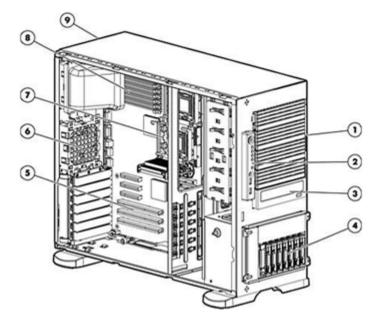



### **Front View:**

- 1. Five removable media bays
- 2. Front display panel; includes power button, UID, two USB 2. Serial port 2.0 ports, and system status LED's
- 3. CD-ROM Drive (Dual-Core models), DVD-ROM Drive (Quad-Core models)
- 4. Eight SFF (2.5") (shown) or six LFF (3.5") SAS or SATA Hot Plug drive bays
- 5. Six expansion slots (three PCI Express, three PCI-X)
- 6. Two system fans standard with support for optional redundant system fans
- 7. Support for two Intel Dual-Core or Quad-Core Xeon 5000 sequence processors
- 8. Eight PC2-5300 FB-DIMM (DDR2 667) memory sockets
- 9. Single Hot-Plug power supply standard, optional second redundant supply for availability

#### **Rear View:**

- 1. Monitor port
- 3. USB ports
- 4. Integrated Lights-Out 2 (iLO2) port
- 5. Network port
- 6. PCI Express x4
- 7. PCI-X 64/100
- 8. PCI-X 64/133
- 9. Access to add 2nd redundant power supply
- 10. Mouse port
- 11. Keyboard port
- 12. Power

### What's New

- New Intel's latest Quad-Core Xeon 5400 series processors with 12MB (2x6MB) L2 cache
- Base models with Quad-Core Xeon 5400 series processors come standard with 2GB system memory

### At A Glance

Building on a tradition of excellence, the HP ProLiant family introduces the fifth generation HP ProLiant ML350 server. The HP ProLiant ML350 G5 server provides Multi-Core performance, enterprise level management, and highly available redundant options in a modular server form factor. New for this generation is a smaller and quieter chassis, embedded Smart Array E200i Controller and 5 media bays.

### Processors:

- Quad-Core and Dual-Core Intel® Xeon™ processors for blazing performance; systems support up to 2
- o 1333/1066/667 MHz front side bus (FSB)
- O Intel® 5000Z chipset

### Memory:



#### Overview

- Eight PC2-5300 Fully Buffered DIMMs (DDR2 667) sockets with online-spare support for cost-effective memory configuration and expansion and 2:1 interleaving
- O Up to 16 GB of memory supported on Dual-Core Models (5000 and 5100 series)
- O Up to 32 GB of memory supported on Quad-Core Models (5300 and 5400 series)

#### • Storage Controllers:

- Entry Models: HP Smart Array E200i/64MB Controller (integrated SAS/SATA Hot-Plug Controller with RAID 0/1/1+0 support)
  - 128MB BBWC optional upgrade kit for RAID 5 support also available
- O Base Models: HP Smart Array E200i/128 BBWC Controller (RAID 0/1/1+0/5)

### • Internal Drive Support:

- O Up to eight SFF (2.5") or six LFF (3.5") Hot Plug Serial Attached SCSI (SAS) or Serial-ATA (SATA) hard drives
- O Maximum of 4.50TB of internal storage capacity (using Hot-Plug SATA drives)

## • Network Controller:

 Embedded NC373i Multifunction Gigabit Network Adapter with TCP/IP Offload Engine, including support for Accelerated iSCSI through an optional Licensing Kit

### • Expansion Slots:

- Six total expansion slots
- O One 64-bit/133-MHz PCI-X; two 64-bit/100-MHz PCI-X; three x8 PCI Express (x4 speed)
- Optional PCI-X Expander provides additional two 64-bit/100-MHz PCI-X slots by converting a single PCI Express slot
- A single x8 PCI Express slot with x8 bus speed can be achieved by attaching the x4/x8 PCIE Bus Expander option kit. (Please see the chart and notes in the Expansion Slots under Standard Features below for more details)

### USB Ports:

O Six USB 2.0 ports: (2) front; (2) rear; (2) internal

### Redundancy:

- Optional Hot plug redundant power supplies
- O Support for optional redundant system fans

## • Management:

- O HP Insight Control Environment server management software
- Integrated Lights-Out 2 featuring Integrated Remote Console with KVM over IP performance over shared network access
- O Support for ROM-Based Setup Utility (RBSU) and redundant ROM
- O Systems Insight Manager, SmartStart, and Automatic Server Recovery 2 (ASR-2)
- HP Power Meter and Power Regulator for ProLiant, delivering integrated power consumption monitoring and server level, policy based power management for industry leading energy efficiency and savings on system power and cooling costs

#### Deployment/Serviceability:

- O Optional parallel and second serial port available without using a PCI slot
- O Tool-free chassis entry and component access
- O Tool-free motherboard removal
- O Universal rail solution supporting both square and round hole rack environments

## Warranty:

O This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. SATA hard drives have a one-year warranty.

**NOTE:** Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html



## Standard Features

**NOTE:** For a brief, printer friendly data sheet that describes this product and informs you of the essential capabilities and specifications, please visit: http://h71028.www7.hp.com/ERC/downloads/4AA0-6362ENW.pdf.

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

**Processor** 

One of the following depending on Model

Quad-Core Intel Xeon Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB)

**NOTE:** Available via Configuration To Order only.

Quad-Core Intel Xeon Processor E5405 (2.00 GHz, 80 Watts, 1333 FSB)

**NOTE:** Available via Configuration To Order only.

Quad-Core Intel Xeon Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB)

**NOTE:** Available via Configuration To Order only.

Quad-Core Intel Xeon Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB)

**NOTE:** Available via Configuration To Order only.

Quad-Core Intel Xeon Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB)

**NOTE:** Available via Configuration To Order only.

Dual-Core Intel Xeon Processor 5160 (3.00 GHz, 80 Watts, 1333 FSB)

**NOTE:** Available via Configuration To Order only.

Dual-Core Intel Xeon Processor 5150 (2.66 GHz, 65 Watts, 1333 FSB)

NOTE: Available via Configuration To Order only.

Dual-Core Intel Xeon Processor 5110 (1.60 GHz, 65 Watts, 1066 FSB)

**NOTE:** Available via Configuration To Order only.

Quad-Core Intel Xeon Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB)

Quad-Core Intel Xeon Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB)

Quad-Core Intel Xeon Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB)

Quad-Core Intel Xeon Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB)

Quad-Core Intel Xeon Processor E5310 (1.60 GHz, 80 Watts, 1066 FSB)

Dual-Core Intel Xeon Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB)

Dual-Core Intel Xeon Processor 5130 (2.00 GHz, 65 Watts, 1333 FSB)

Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB)

Dual-Core Intel Xeon Processor 5080 (3.73 GHz, 130 Watts, 1066 FSB)

Dual-Core Intel Xeon Processor 5060 (3.2 GHz, 130 Watts, 1066 FSB)

Dual-Core Intel Xeon Processor 5050 (3.0 GHz, 95 Watts, 667 FSB)

#### **Cache Memory**

One of the following depending on Model

12MB (2 x 6MB) Level 2 cache (5400 series)

8MB (2 x 4MB) Level 2 cache (5300 series)

4MB (1 x 4MB) Level 2 cache (5100 series)

4MB (2 x 2MB) Level 2 cache (5000 series)

# Upgradeability

Upgradeable to dual processing (8 or 4 cores)

(Please contact your regional sales support to determine quad core upgradeability. Some of the

earlier shipping models may not support this upgrade)

### Chipset

Intel 5000Z Chipset

**NOTE:** For more information regarding Intel chipsets, please see the following URL:

http://www.intel.com/products/server/chipsets/.



### Standard Features

**Memory Protection** 

Online spare

Advanced ECC

**Memory** 

One of the following depending on model

Type PC2-5300 Fully Buffered DIMMs (DDR2-667)

Standard (Entry Models) 1 GB (2 x 512 MB) on Quad-Core 5400 series

1 GB (2 x 512 MB) on Quad-Core 5300 series

512 MB (1 x 512 MB) on Dual-Core Models

Standard (Base Models) 2 GB (2 x 1GB) on Quad-Core 5400 series

1 GB (2 x 512 MB) on Quad-Core 5300 series

1 GB (2 x 512 MB) on Dual-Core Models

Maximum (Dual-Core

Models)

16 GB (8 x 2 GB)

Maximum (Quad-Core

32 GB (8 x 4 GB)

Models)

### **Network Controller**

Embedded NC373i Multifunction Gigabit Network Adapter with TCP/IP Offload Engine, including support for Accelerated iSCSI through an optional Licensing Kit

### **Expansion Slots**

Slot Number	Bus Speed/Connector	Maximum Card Length	Bus Number*	Device Number**	Hot Plug	PCI Voltage
6****	PCI Express x4/x8	12.28"	15	0	no	N/A
5	PCI Express x4/x8	12.28"	6	0	no	N/A
4***	PCI Express x4/x8	12.28"	9	0	no	N/A
3	64-bit/100MHz PCI-X	12.28"	12	2	no	3.3 Volt
2	64-bit/100MHz PCI-X	12.28"	12	1	no	3.3 Volt
1	64-bit/133MHz PCI-X	12.28"	20	1	no	3.3 Volt

<sup>\*</sup>NOTE: Bus number listed reflects the default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

NOTE: Slots 1-3 can accept 3.3V or universal keyed PCI cards.

### **Storage Controller**

Entry Models HP Smart Array E200i/64MB Controller

Base Models HP Smart Array E200i/128 BBWC Controller

**NOTE:** Supports RAID 0/1/1+0 with 64MB of Cache, upgradeable to 128MB with BBWC for RAID 5 support

5 support.



<sup>\*\*</sup>NOTE: Slots are enumerated differently based on operating system. Microsoft's operating systems enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

\*\*\*NOTE: A single PCI Express slot with x8 Bus Speed can be achieved by attaching the x4/x8 PCIE Bus Expander option kit (403724-B21) to slot number 4. The installation of this kit uses both slots 4 and 5 to create the single x8 speed PCI Express slot.

<sup>\*\*\*\*</sup>**NOTE**: The optional PCI-X expander can utilize slot 6 to provide an additional two (2) 64-Bit PCI-X full length, full height slots. Please see "Server Specific Options" below for more information. (435670-B21)

### Standard Features

Storage Diskette Drives None included standard

Optical Drive Quad-Core 5400 series: 16x SATA DVD-ROM drive
One of the following
Quad-Core 5300 series: 16x PATA DVD-ROM drive

depending on model

Dual-Core: 48x IDE CD-ROM drive

NOTE: Quad-Core 5400 series BTO Models are configured with SATA

optical drive.

Hard Drives None included standard

Maximum Internal Storage

One of the following depending on model

Hot Plug LFF (3.5") Serial ATA (SATA)

') 4.50TB

6 x 750GB

Hot Plug LFF (3.5") Serial Attached SCSI

(SAS)

Hot Plug SFF (2.5")

960GB

1.80TB

8 x 120GB

6 x 300GB

SATA

Hot Plug SFF (2.5") SAS 1.168TB

8 x 146GB

Interfaces Parallel Optional parallel port available

Serial 1 (optional 2nd serial port available)

Pointing Device (Mouse) 1 Graphics 1 Keyboard 1

Network RJ-45 2 (1 dedicated for iLO 2) USB 2.0 Ports 6 (2 front, 2 rear, 2 internal)

NOTE: Please see the following URL for additional information

regarding USB support:

http://h18004.www1.hp.com/products/servers/platforms/usb-

support.html.

**Graphics** 

Integrated ATI ES1000, 32MB video standard

16 bit color: maximum resolution of 1600 x 1200
32 bit color: maximum resolution of 1280 x 1024

NOTE: Maximum resolution available via iLO 2 remote console is 1280x1024.

**Form Factor** 

Tower or Rack (5U)

NOTE: Rack models (and rack conversion kit) support:

- Square or round hole racks 24"- 36" deep, including HP Rack System /E and HP Systems
- Telco racks with 3rd part option kit from Rack Solutions http://www.racksolutions.com/hp

ProLiant Essentials Foundation Pack Software HP Systems Insight Manager

HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible environment to centrally manage servers, storage and other infrastructure devices across multiple operating system platforms.

Through a single management view, HP SIM provides core management services that include device discovery and identification,



### Standard Features

event views, health monitoring, inventory data collection, software version control and reporting. HP SIM is built on industry standards and is extensible with value-added ProLiant Essentials. Integrity Essentials and Storage Essentials software to meet individual management needs. For more details on HP SIM visit http://www.hp.com/go/hpsim.

HP SIM provides organizations with the following benefits:

- Simplifies and consolidates infrastructure lifecycle management using task and query based functionality
- Provides the foundation for infrastructure automation and virtualization
- Enables IT management based on business processes not hardware platforms
- Lowers infrastructure maintenance cost and frees resources for innovation
- Maximizes resource utilization with virtualization technologies
- Provides a central point of integration between infrastructure and Enterprise management tools such as HP OpenView

**Insight Management** Agents

Insight Management Agents should be installed on all HP servers to present system instrumentation, health and configuration information into HP Systems Insight Manager and the HP System Management Homepage. The HP System Management Homepage aggregates systems data from Insight Management Agents and other HP management tools, providing a consolidated browser-based interface for managing individual servers

Insight Management Agents and The HP System Management Homepage are included on ProLiant Support Packs, and can also be installed using the server profiles provided with the ProLiant Essentials Rapid Deployment Pack. For additional information about the Management Agents and the HP System Management Homepage please visit the management Web site at:

SmartStart

SmartStart simplifies server setup by providing a quick, easy way to deploy reliable and consistent server configurations. For more information, please visit the SmartStart Web site at

http://www.hp.com/servers/manage.

http://www.hp.com/servers/manage

Minimum SmartStart version supported: 7.60

Subscriber's Choice

Subscriber's Choice Driver and Support Alerts/Notifications is a webbased email subscription service that provides automatic delivery of software and driver change notifications for ProLiant products. Sign up

at http://www.hp.com/go/subscriberschoice

and customize your profile to receive alerts on updates as they become

available.

ROMPag, support software, and configuration utilities The latest software, drivers, and firmware fully optimized and tested for

your ProLiant server and options

Available in SmartStart or downloadable from the Software and Drivers

download pages at http://www.hp.com/go/support.

**Insight Diagnostics** Online Edition

The most advanced configuration analysis, reporting and troubleshooting utilities used by HP at your fingertips

Available in SmartStart.

**Optional ProLiant** 

Optional software offerings that extend the functionality of an Adaptive Essentials Value Packs Infrastructure to address specific business problems and needs:

> Accelerated iSCSI Pack - enables the embedded Multifunction network controller to serve as both a NIC and an iSCSI HBA



### Standard Features

- providing access to SAN storage over the same connection used for networking. Processing of the protocol stack is offloaded to the NIC reducing CPU utilization and greatly improving the speed with which the requests are processed and sent to the network.
- HP Insight Control Environment is based on HP Systems
   Insight Manager and ProLiant Essentials software, and brings the
   value of Insight Control to ProLiant customers by delivering
   comprehensive health and performance monitoring, remote
   control, vulnerability scanning and patch management as well as
   flexible deployment and power management through an
   integrated installation package and streamlined licensing. For
   more information, visit: http://www.hp.com/go/ice
- Rapid Deployment Pack (RDP) is an automated deployment and provisioning solution for all ProLiant servers. RDP includes the ProLiant Integration Module featuring ProLiant server preconfigured events for OS installation, and optimized software drivers, firmware and management agents. Every RDP disc includes 7-day, 10-node trial licenses for evaluation purposes. RDP requires a license for each server deployed and is available for purchase with HP servers. For more information, visit: http://www.hp.com/servers/rdp.
- Server Migration Pack Universal Edition Upgrading, replacing, or virtualizing your existing server? Effortlessly transition to new virtual or physical HP ProLiant servers or BladeSystem with automated, accurate and affordable migration of OS, application and data. SMP Universal automates the manual processes required for migrating servers between physical or virtual platforms, whether migrating to VMware or Microsoft virtual machines. SMP Universal allows all of the following:
  - Physical to ProLiant
  - O Physical to virtual
  - Virtual to virtual
  - Virtual to ProLiant
- Performance Management Pack (offered exclusively through the Insight Control suites) - a performance management solution that identifies and explains hardware performance bottlenecks on ProLiant servers and attached options enabling users to better utilize their valuable resources.
- Integrated Lights-Out Advanced Pack upgrades the iLO 2 processor with comprehensive remote control including Virtual KVM remote graphical console, enhanced console sharing and replay, virtual media (floppy, CD/DVD, USB key), virtual folders, historical power reporting, power capping and enterprise security (directory services and two-factor authentication).
- Integrated Lights-Out Select Pack upgrades the iLO 2
  processor with enhanced console sharing and replay, virtual
  media (floppy, CD/DVD, USB key), virtual folders, historical power
  reporting, power capping and enterprise security (directory
  services and two-factor authentication) for servers managed using
  remote consoles available in iLO 2 Standard and iLO 2 Standard
  Blade Edition.
- Insight Power Manager (IPM) upgrades the single-server remote management capabilities of iLO Select/Advanced to include centralized reporting and policy-based management of power consumption and thermal output provided by the Insight Power Manager. IPM unifies all of this functionality within a single user interface - HP Systems Insight Manager.

Optional Remote Management Packs



### Standard Features

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to http://www.hp.com/servers/proliantessentials or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

NOTE: For more information regarding ProLiant Essentials Software, please see the following

URL: http://www.hp.com/servers/proliantessentials.

### **Industry Standard** Compliance

ACPI V2.0 Compliant PCI 2.2 Compliant PXE Support **WOL Support** PCI-X 1.0a Compliant **Novell Certified** 

Microsoft® Logo certifications

**USB 2.0** 

### **Availability**

Optional Hot-Plug, Redundant Power supply

Online-Spare Memory

Optional Dual Redundant System Fans

Remote Management Integrated Lights-Out (iLO 2) Management 2

- Virtual Text Remote Console (pre-OS only)
- Remote Serial Console
- Virtual Power Button Control
- Virtual Unit ID control
- Integrated Remote Console (ActiveX Control client)
- Dedicated & full function shared network connectivity with VLAN
- Embedded system health
- Present power consumption
- Browser, command line and scripted access
- Automatic IP Configuration via DHCP/DNS/WINS
- Industry Standard 128-bit Secure Sockets Layer (SSL) and Secure Shell security (SSH)
- Advanced Encryption Standard (AES)/Triple Data Encryption Standard (3DES)
- OS independent hardware health status
- IML and iLO Event Logging
- Support for 12 user accounts with customizable access privilege

### **System Management**

**HP Systems Insight Manager** 

SmartStart Redundant ROM

System Firmware Update

**ROMPag** 

ProLiant RBSU (ROM-Based Setup Utility) Automatic Server Recovery-2 (ASR-2)

Dynamic Sector Repairing (with Smart Array Controller) Drive Parameter Tracking (with Smart Array Controller)

Pre-Failure Warranty (covers processors, memory, and SAS hard drives)



### Standard Features

Security

Power-on password Setup password Diskette boot control

Parallel and serial interface control

Disk configuration lock Power switch security

#### **Server Power Cords**

ProLiant ML servers in a rack-mount configuration no longer ship standard with NEMA power cords that allow connection to 110V US wall outlets in a home or office. These servers are primarily connected to PDU's in data center racks so they now ship standard with only a PDU power cord (416151-B21). If a user wishes to power a ProLiant ML rack-mount server using a 110V receptacle (NEMA-15), the NEMA power cord must be ordered separately. The 12' cord (AF556A) or 6' cord (187335-001) can be purchased online at HP.COM. In a tower configuration, the servers ship standard with a 6' country specific NEMA power cord. If customers require a local power cord, they can check the power cord matrix for the appropriate country specific sku. Please see the following power cord matrix: http://www.hp.com/go/powercordmatrix.

# UPS and PDU Power Cord Matrix

Please see the UPS and PDU cable matrix that lists cable descriptions, requirements, and specifications for UPS and PDU units:

http://h18004.www1.hp.com/products/servers/proliantstorage/power-protection/index.html

### **Power Supply**

800 Watt-CE Mark Compliant Hot Plug Power Supply (1000 Watt high line)

Optional second Power Supply provides redundant capability

**NOTE:** Please see the "Power Specifications" section later in this document for low line and high line requirements.

System Fans

2 fans ship standard, dual redundant fans are optional, 4 fans total supported (does not include

power supply or processor heat sink fans)

### Required Cabling

For required cabling information, refer to the HP ProLiant ML350 G5 cabling matrix at http://www.hp.com/servers/proliantML350.

**NOTE:** Please see the "Storage" section of this QuickSpecs for important information on controllers and cables required to support SAS or SATA hard drives as well as storage management software available for SATA hard drives.



## Standard Features

### **OS Support**

Microsoft Windows Server 2003/R2 (Standard, Web, and Enterprise Editions)

Microsoft Windows Small Business Server 2003 Microsoft Windows 2000 Server and Advanced Server

Novell NetWare 6.5/Open Enterprise Server

Red Hat Enterprise Linux SUSE Linux Enterprise Server SCO OpenServer 5.0.7/6.0 SCO UnixWare 7.1.3/7.1.4

**NOTE:** For a complete and up-to-date listing of supported operating systems please visit our OS Support Matrix at: http://www.hp.com/go/supportos.

**NOTE:** For more Linux OS support & certification information, please visit the ProLiant & BladeSystem Server Linux matrix

http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html

**NOTE:** Optional hardware may be required to support some operating systems.

**NOTE**: For information on how to buy server operating systems from HP please visit the OS

product site at: http://h18004.www1.hp.com/products/servers/software/OEM.html

**NOTE:** For an up-to-date listing of the latest drivers available for the HP ProLiant ML350 G5,

please see: http://www.compaq.com/support/files/server/us/index.html.

**NOTE:** For more information on VMware support, please visit the VMware Server Support Matrix at: http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html.

# Installation of Server into Telco Racks

Support for all 2-post Telco racks requires the use of the HP ProLiant ML350 G5 rack kit and an additional option kit from Rack Solutions. http://www.racksolutions.com/hp.

# Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to http://www.hp.com/go/factory-express.

# **HP Enterprise Configurator**

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.



# Standard Features

### **Service and Support**

HP Care Pack services provide total care and support expertise with committed response designed to meet your IT and business needs.

HP Care Pack services include coverage for the HP branded hardware options qualified for the server and purchased at the same time or afterward that are internal to the enclosure. This also includes the 22" and smaller external monitors and tower UPS options up to 3kVA. These items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, and standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions, provides a range of support services designed to meet the varying needs of your business. Whether an SMB, or large global corporation, HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

**Recommended Service** - simplify ProLiant solution implementation, maintenance, and management.

- Support 3-Year 4-Hour response 24x7 Same Business Day Coverage only
- Deployment Service Installation and Start up only

Enhanced Service - optimize service level to increase IT performance and availability.

• Support - -3-Year Support Plus 24 only

Refer to the information on "Installation & Start-Up" for service on ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet; to be delivered on a scheduled basis 8am-5pm, M-F, excluding HP holidays.

**NOTE:** For a complete listing of service offerings and information visit:

http://www.hp.com/services/proliantservices http://www.hp.com/go/proliant/carepack



### Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information -Factory Integrated Models" section.

HP ML350 G5 Entry Models

depending on Model

**Tower Quad-Core Models** HP ML350T05 E5420 458239-xx1

HP ML350T05 E5410 **LFF** 

458244-xx1 HP ML350T05 E5310

LFF 440188-xx1

**Dual-Core Models** 

416893-xx1

HP ML350T05 5120 LFF 416892-xx1

Rack **Quad-Core Models HP** ML350R05 E5420 LFF 458240-xx1

**Dual-Core Models** HP ML350R05 5130 LFF

416894-xx1

Processor(s) One of the following

**Cache Memory** 

Memory One of the following depending on Model

HP ML350T05 5130 LFF Network Controller **Storage Controller** 

> Internal Storage **Optical Drive** One of the following depending on Mode

**Hard Drive** 

**PCI-Express Slots** 

**Power Supplies** 

**Fans** 

**Form Factor** One of the following depending on Model (1) Quad-Core Intel Xeon E5420 Processor (2.50 GHz, 80 Watts, 1333 FSB)

(1) Quad-Core Intel Xeon E5410 Processor (2.33 GHz, 80 Watts, 1333 FSB)

(1) Quad-Core Intel Xeon E5310 Processor (1.6 GHz, 80 Watts, 1066 FSB)

(1) Dual-Core Intel Xeon 5130 Processor (2.0GHz, 65 Watts, 1333 FSB) (1) Dual-Core Intel Xeon 5120 Processor (1.86 GHz, 65 Watts, 1066 FSB)

12MB (2x6MB) Level 2 cache - 5400 Series 8MB (2 x 4MB) Level 2 cache - 5300 Series 4MB (1 x 4MB) Level 2 cache - 5100 Series Quad-Core 5400 Series: 1GB (2 x 512MB) Quad-Core 5300 Series: 1GB (2x512MB)

Embedded NC373i Multifunction Gigabit Server Adapter

Smart Array E200i/64 Controller (RAID 0/1/1+0) None Ship Standard; (0/6 LFF) 1.80TB LFF SAS: 4.50TB LFF SATA

Quad-Core: 16x DVD-ROM standard Dual-Core: 48x CD-ROM standard

Dual-Core: 512 MB (1 x 512 MB)

Six expansion slots (three PCI Express, three PCI-X) 800-Watt CE-mark compliant Hot-Plug power supply Optional second power supply provides redundant operation

2 fans ship standard, 4 fans total supported (does not include power

supply or processor heatsink fans)

Tower Rack (5U), (8.75 in/22.25 cm)

HP ML350 G5 Base Models

**Tower Quad-Core Models** HP ML350T05 E5430

**SFF** 458238-xx1

HP ML350T05 E5420

SFF 458242-xx1

HP ML350T05 E5410

458246-xx1 HP ML350T05 E5320 SFF

438730-xx1 HP ML350T05 E5310 SFF

Processor(s)

One of the following depending on Model

**Cache Memory** 

One of the following

depending on Model

(1) Quad-Core Intel Xeon E5430 Processor (2.66 GHz, 80 Watts, 1333 FSB)

(1) Quad-Core Intel Xeon E5420 Processor (2.50 GHz, 80 Watts, 1333 FSB)

(1) Quad-Core Intel Xeon E5410 Processor (2.33 GHz, 80 Watts, 1333

(1) Quad-Core Intel Xeon E5320 Processor (1.86 GHz, 80 Watts, 1066 FSB)

(1) Quad-Core Intel Xeon E5310 Processor (1.6 GHz, 80 Watts, 1066 FSB)

(1) Dual-Core Intel Xeon 5140 Processor (2.33 GHz, 65 Watts, 1333

(1) Dual-Core Intel Xeon 5130 Processor (2.0 GHz, 65 Watts, 1333 FSB)

12MB (2 x 6MB) Level 2 cache - 5400 Series 8MB (2 x 4MB) Level 2 cache - 5300 Series 4MB (1 x 4MB) Level 2 cache - 5100 Series



### Models

**SFF** 

SFF

417537-xx1

Memory Quad-Core 5400 Series: 2 GB (2 x 1GB) standard 434717-xx1 Quad-Core 5300 Series: 1 GB (2 x 512MB) standard

Dual-Core: 1 GB (2 x 512MB) standard **Dual-Core Models** HP ML350T05 5140 SFF

**Network Controller** Embedded NC373i Multifunction Gigabit Server Adapter 417605-xx1

**HP ML350T05 5130 SFF Storage Controller** Smart Array E200i/128 BBWC Controller (RAID 0/1/1+0/5) 417536-xx1

**Hard Drive** None Ship Standard; (0/8 SFF) Rack **Quad-Core Models** 

1.168TB SFF SAS; 480GB SFF SATA **Internal Storage** HP ML350R05 E5430

**Optical Drive** Quad-Core: 16x DVD-ROM standard 458237-xx1 One of the following Dual-Core: 48x CD-ROM standard HP ML350R05 E5420 depending on Mode **SFF** 

458243-xx1 **PCI-Express Slots** Six expansion slots (three PCI Express, three PCI-X) HP ML350R05 E5320

**Power Supplies** 800-Watt CE-mark compliant Hot-Plug power supply 440189-xx1

Optional second power supply provides redundant operation

**Dual-Core Models Fans** 2 fans ship standard, 4 fans total supported (does not include power HP ML350R05 5140

supply or processor heatsink fans)

417538-xx1 **Form Factor** Tower

HP ML350R05 5130 One of the following Rack (5U), (8.75 in/22.25 cm) **SFF** depending on Model

**Tower Code Key Rack Code Key Country Code Key** 

> U.S. English U.S. English XX=00 Australia N/A XX=01 UK XX=03 N/A XX=04 Germany N/A N/A XX=05 France XX=20 Brazil N/A XX=29 Japan Japan APD APD XX=37 XX=42 Europe Europe XX=AA **PRC PRC**



# Configuration Information - Factory Integrated Models

**NOTE:** This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

**NOTE:** HP does not allow factory integration of options into standard models listed above. Configure-to-order servers must start with a CTO Chassis.

NOTE: This product offering does not support HP Factory Express Server Configuration Level 1.

NOTE: FIO indicates that this option only available as a Factory Installable Option.

# Step 1: Base Configuration (choose one of the following configurable models)

### Models ML350 G5 Tower Models

#### LFF - 3.5" Drives

HP ProLiant ML350G5 LFF SAS/SATA Tower CTO Chassis

412645-B21

#### Includes:

Embedded NC373i Multifunction Gigabit Server Adapter

Integrated Smart Array E200i Controller

Six Hot-Plug (LFF) SAS/SATA Drive Bays

Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and

three x4 PCI Express (with x8 connectors)

Six USB ports

800W Hot-Plug Power Supply

**Tower Form Factor** 

Keyboard

2-button Mouse

### SFF - 2.5" Drives

HP ProLiant ML350G5 SFF SAS/SATA Tower CTO Chassis

395570-B21

### Includes:

Embedded NC373i Multifunction Gigabit Server Adapter

Integrated Smart Array E200i Controller

Eight Hot-Plug (SFF) SAS/SATA Drive Bays

Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and

three x4 PCI Express (with x8 connectors)

Six USB ports

800W Hot-Plug Power Supply

**Tower Form Factor** 

Keyboard

2-button Mouse

#### ML350 G5 Rack Models

# LFF - 3.5" Drives

HP ProLiant ML350G5 LFF SAS/SATA Rack CTO Chassis

412644-B21

### Includes:

Embedded NC373i Multifunction Gigabit Server Adapter

Integrated Smart Array E200i Controller

Six Hot-Plug (LFF) SAS/SATA Drive Bays

Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and

three x4 PCI Express (with x8 connectors)

Six USB ports



# Configuration Information - Factory Integrated Models

800W Hot-Plug Power Supply Rack (5U) Form Factor

### SFF - 2.5" Drives

HP ProLiant ML350G5 SFF SAS/SATA Rack CTO Chassis

395569-B21

#### Includes:

Embedded NC373i Multifunction Gigabit Server Adapter

Integrated Smart Array E200i Controller

Eight Hot-Plug (SFF) SAS/SATA Drive Bays

Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and

three x4 PCI Express (with x8 connectors)

Six USB ports

800W Hot-Plug Power Supply

Rack (5U) Form Factor

# Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

Processors	HP E5440 ML350G5 FIO Kit	458257-L21
	HP E5430 ML350G5 FIO Kit	458259-L21
	HP E5420 ML350G5 FIO Kit	458265-L21
	HP E5410 ML350G5 FIO Kit	458267-L21
	HP E5405 ML350G5 FIO Kit	458269-L21
	HP X5355 ML350G5 FIO Kit	436015-L21
	HP E5345 ML350G5 FIO Kit	436013-L21
	HP E5335 ML350G5 FIO Kit	437444-L21
	HP E5320 ML350G5 FIO Kit	435512-L21
	HP E5310 ML350G5 FIO Kit	435513-L21
	HP X5160 ML350G5 FIO Kit	416891-L21
	HP X5150 ML350G5 FIO Kit	416890-L21
	HP X5140 ML350G5 FIO Kit	416889-L21
	HP X5130 ML350G5 FIO Kit	416888-L21
	HP X5120 ML350G5 FIO Kit	416887-L21
	HP X5110 ML350G5 FIO Kit	416886-L21
Base Memory	512 MB FBD PC2-5300 1 x 512 MB Kit	413507-B21
	1 GB FBD PC2-5300 2 x 512 MB Kit	397409-B21
	2 GB FBD PC2-5300 2 x 1 GB Kit	397411-B21
	2 GB FBD PC2-5300 2 x 1 GB LP Kit	461826-B21
	4 GB FBD PC2-5300 2 x 2 GB Kit	397413-B21
	4 GB FBD PC2-5300 2 x 2 GB LP Kit	461828-B21
	8 GB FBD PC2-5300 2 x 4 GB Kit	397415-B21
Smart Array E200i Controller Cache	HP SA E200 64MB Cache FIO Kit  NOTE: Select this option for RAID 0/1/1+0	405102-B21
	128-MB Battery-Backed Write Cache (BBWC) <b>NOTE:</b> Select this option for RAID 0/1/1+0/5.	351580-B21
Optical Drive	Floppy Drive ML350/370 G5 Kit	409582-B21
	CD-RW/DVD-ROM Combo Drive Option Kit	331346-B21



Configuration I	nformation - Factory Integrated Models	
	HP 48X CD-ROM ALL (no screws)	384758-B21
	HP DVD±R/RW 16X Half Height	383974-B21
	16X DVD-ROM Drive Option Kit (Carbon)	217053-B21
	HP Half-Height SATA DVD-ROM Optical Drive	447326-B21
	HP Half-Height SATA DVD RW Optical Drive	447328-B21
Step 3: Choo	ose Additional Options for Factory Integration	
Controllers	HP Smart Array P400/256MB Controller  NOTE: SAS Controller supporting RAID 0/1/1+0/5.	405132-B21
	HP Smart Array P600/256 BBWC Controller NOTE: SAS Controller supporting RAID 0/1/1+0/5/6.	337972-B21
	Smart Array 642 Controller  NOTE: U320 Controller.	291967-B21
	Smart Array 6402/128 Controller NOTE: U320 Controller.	273915-B21
	Smart Array 6404/256 Controller NOTE: U320 Controller.	273914-B21
	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
	HP Smart Array 6404/512 FIO CNTRLR	452240-B21

# **Step 4: Choose Additional Options for Factory Integration**

**NOTE:** For additional options, please refer to the "Options" section below.



# **Options**

**Unique Options** 

NOTE: Some options may not be factory configurable. Please contact your local sales representative for additional

HP ProLiant ML350 G5 HP Redundant Fan ML350 G5 Kit

409579-B21

HP PCI-X Expander Kit (2 x 64-bit 100MHz PCI-X slots)

435670-B21

NOTE: The HP PCI-X Expander kit converts a single PCI Express slot (slot 6)

into two full height, full length 64-bit 100MHz PCI-X slots

NOTE: The HP PCI-X Expander kit can support a maximum of one (1) HP Smart array, HBA, or SCSI PCI-X adapter. Prioritize internal slots for use with PCI-X storage controllers. Please refer to the ML350G5 user guide for additional

details.

HP Tower to Rack Conversion Kit - ML350 G5 Kit

412640-B21

NOTE: See "Redundant Options" section below for Hot Plug Redundant Power

supplies.

### **HP Insight Control and ProLiant Essentials Value Pack**

## **ProLiant Essentials** Offerings

NOTE: Electronic licensing options are available for Insight Control suites and select ProLiant Essentials software products. Please see the appropriate Insight Control and ProLiant Essentials QuickSpecs for additional information.

### **Accelerated iSCSI Pack**

ProLiant Essentials Accelerated iSCSI Pack, No Media, Single License

**NOTE:** For use with a single NIC port. Contains one license with a unique

license activation key and documentation.

**NOTE:** For additional License Kits, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12466\_div/12466\_div.html

### **HP Insight Control Environment**

HP Insight Control Environment, No Media 1-Server License including 1 year of

452148-B21

452681-B21

452151-B21

460756-B21

460750-B21

452679-B21

24x7 Technical Support and Updates **NOTE:** For additional License Kits, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/guickspecs/12631 div/12631 div.html

## **ProLiant Essential RDMA Pack**

HP ProLiant Essentials RDMA Pack for Embedded Multifunction Gigabit Server

Adapters, No Media, 1-Server License

**NOTE:** For additional License Kits, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/guickspecs/12573 div/12573 div.html

### **Rapid Deployment Pack**

ProLiant Essentials Rapid Deployment Pack No Media 1-Server License

including 1 year of 24x7 Technical Support and Updates

NOTE: This license allows 1 server to be deployed and managed via RDP.

NOTE: For additional License Kits, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/guickspecs/11053 div/11053 div.html

# **HP Server Migration Pack - Universal Edition**

HP Server Migration Pack - Universal Edition, No Media, 1-Year Unlimited Migration License, including 1 year of 24x7 Technical Support and Updates

**NOTE:** This license allows unlimited migrations (physical to ProLiant, physical to

virtual, virtual to virtual, and virtual to ProLiant) for one year. Contains one license with a unique license activation key and documentation.

HP Server Migration Pack - Universal Edition, No Media, Physical / Virtual to ProLiant Single Migration License, including 1 year of 24x7 Technical Support and Updates

**NOTE:** This license allows 1 physical to ProLiant or virtual to ProLiant migration. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed



460753-B21

452141-B21

452145-B21

452677-B21

# QuickSpecs

# **Options**

online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

HP Server Migration Pack - Universal Edition, No Media, Physical / Virtual to Virtual Single Migration License, including 1 year of 24x7 Technical Support and Updates

**NOTE:** This license allows 1 physical to virtual or virtual to virtual migration. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

### **Remote Management**

**NOTE:** Electronic licensing options are available for Insight Control suites and select ProLiant Essentials software products. Please see the appropriate Insight Control and ProLiant Essentials QuickSpecs for additional information.

### **Integrated Lights-Out Advanced Pack**

Integrated Lights-Out Advanced Pack, No Media ,1 Server License, including 1 year of 24x7 Technical Support and Updates

**NOTE:** For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/10861\_div/10861\_div.html

### **Integrated Lights-Out Select Pack**

Integrated Lights-Out Select Pack, No Media, 1 Server License, including 1 year 452158-B21 of 24x7 Technical Support and Updates

**NOTE:** For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/10861\_div/10861\_div.html

### **Integrated Lights-Out Power Management Pack**

HP iLO Power Management Pack, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates

**NOTE:** This option kit includes 1 license for iLO Advanced and Insight Power Manager.

**NOTE:** For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12632\_div/12632\_div.html

### **Insight Power Manager**

HP Insight Power Manager, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates

**NOTE:** This option kit includes 1 license for Insight Power Manager. **NOTE:** For additional License Kits, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12623\_div/12623\_div.html

**NOTE:** Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to http://www.hp.com/servers/proliantessentials or the various ProLiant Essentials Value Pack product QuickSpecs for more information

**NOTE:** For more information regarding ProLiant Essentials Software, please see the following URL: http://www.hp.com/servers/proliantessentials.



Options		
Processors	Quad-Core Intel Xeon Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB)	458257-B21
	Quad-Core Intel Xeon Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB)	458259-B21
	Quad-Core Intel Xeon Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB)	458265-B21
	Quad-Core Intel Xeon Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB)	458267-B21
	Quad-Core Intel Xeon Processor E5405 (2.00 GHz, 80 Watts, 1333 FSB)	458269-B21
	Quad-Core Intel Xeon Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB)	436015-B21
	Quad-Core Intel Xeon Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB)	436013-B21
	Quad-Core Intel Xeon Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB)	437444-B21
	Quad-Core Intel Xeon Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB)	435512-B21
	Quad-Core Intel Xeon Processor E5310 (1.6 GHz, 80 Watts, 1066 FSB)	435513-B21
	Dual-Core Intel Xeon Processor 5160 (3.0 GHz, 80 Watts, 1333 FSB)	416891-B21
	Dual-Core Intel Xeon Processor 5150 (2.67 GHz, 65 Watts, 1333 FSB)	416890-B21
	Dual-Core Intel Xeon Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB)	416889-B21
	Dual-Core Intel Xeon Processor 5130 (2.0 GHz,65 Watts, 1333 FSB)	416888-B21
	Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB)	416887-B21
	Dual-Core Intel Xeon Processor 5110 (1.6 GHz, 65 Watts, 1066 FSB)	416886-B21
	Dual-Core Intel Xeon Processor 5080 (3.73 GHz, 130 Watts, 1066 FSB)	409397-B21
	Dual-Core Intel Xeon Processor 5060 (3.2 GHz, 130 Watts, 1066 FSB)	409401-B21
	Dual-Core Intel Xeon Processor 5050 (3.0 GHz, 95 Watts, 667 FSB)	409400-B21
Memory (DIMMs)	512 MB FBD PC2-5300 1 x 512 MB Kit	413507-B21
	1 GB FBD PC2-5300 2 x 512 MB Kit	397409-B21
	2 GB FBD PC2-5300 2 x 1 GB Kit	397411-B21
	2 GB FBD PC2-5300 2 x 1 GB LP Kit	461826-B21
	4 GB FBD PC2-5300 2 x 2 GB Kit	397413-B21
	4 GB FBD PC2-5300 2 x 2 GB LP Kit	461828-B21
	8 GB FBD PC2-5300 2 x 4 GB Kit	397415-B21
Optical Drives	Floppy Drive ML350/370 G5 Kit	409582-B21
	CD-RW/DVD-ROM Combo Drive Option Kit	331346-B21
	HP DVD±R/RW 16X Half Height	383974-B21
	16X DVD-ROM Drive Option Kit (Carbon)	217053-B21
	HP Half-Height SATA DVD-ROM Optical Drive	447326-B21
	HP Half-Height SATA DVD RW Optical Drive	447328-B21
Serial Port Kit	Parallel/Serial Port ML370/350 G5 Kit	401222-B21



# **Options**

Hard Drives	Hot Plug SFF SAS 2.5" Drives	
	HP 36GB 3G SAS 10K SFF SP HDD	375859-B21
	HP 36GB 3G SAS 15K SFF SP HDD	431933-B21
	HP 36GB 3G SAS 15K SFF DP HDD	418369-B21
	HP 72GB 3G SAS 10K SFF SP HDD	375861-B21
	HP 72GB 3G SAS 10K SFF DP HDD	384842-B21
	HP 72GB 3G SAS 15K SFF SP HDD	431935-B21
	HP 72GB 3G SAS 15K SFF DP HDD	418371-B21
	HP 146GB 3G SAS 10K SFF SP HDD	431958-B21
	HP 146GB 3G SAS 10K SFF DP HDD	418367-B21
	Hot Plug SAS 3.5" Drives	
	HP 300GB 3G SAS 15K 3.5" SP HDD	431944-B21
	HP 300GB 3G SAS 15K 3.5" DP HDD	416127-B21
	HP 146GB 3G SAS 15K 3.5" SP HDD	375872-B21
	HP 146GB 3G SAS 15K 3.5" DP HDD	384854-B21
	HP 72GB 3G SAS 15K 3.5" SP HDD	375870-B21
	HP 72GB 3G SAS 15K 3.5" DP HDD	384852-B21
	HP 36GB 3G SAS 15K 3.5" SP HDD	375868-B21
	NOTE: Please see the SAS Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:  http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html (Worldwide)	
	SFF SATA Hot Plug Drives	
	HP 120GB 1.5G SATA 5.4K SFF HDD	431786-B21
	HP 60GB 1.5G SATA 5.4K SFF HDD	379306-B21
	NOTE: SATA hard drives have a 1-year warranty. Please see the SATA Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:  http://h18000.www1.hp.com/products/quickspecs/11940_div/11940_div.html (Worldwide)	
	3.5" SATA Hot Plug Drives	
	HP 750GB 1.5G SATA 7.2K 3.5" HDD	432341-B21
	HP 500GB 1.5G SATA 7.2K 3.5" HDD	395473-B21
	HP 250GB 1.5G SATA 7.2K 3.5" HDD	349239-B21
	HP 160GB 1.5G SATA 7.2K 3.5" HDD	349238-B21
	HP 80GB 1.5G SATA 7.2K 3.5" HDD	349237-B21
	<b>NOTE:</b> SATA hard drives have a 1-year warranty. Please see the SATA Hard Drive QuickSpecs for additional technical information on the hard drives Support details, please see the following:	
	http://h18000.www1.hp.com/products/quickspecs/11940_div/11940_div.html (Worldwide)	
PCI Option	HP x4-x8 PCI-E Bus Expander Option Kit  NOTE: The HP x4/x8 PCI Express Bus Expander kit converts 2 x4 PCI Express slots into a single x8 PCI Express slot for high performance x8 PCI Express cards	403724-B21



# **Options**

**Storage Controllers** 

SAS Controllers	
Smart Array E200 Controller	
HP Smart Array E200/128 BBWC Controller	411508-B21
128-MB Battery-Backed Write Cache (BBWC)  NOTE: Supports the Smart Array E200 Controller, Smart Array 641 Controller, and Smart Array 642 Controller.	351580-B21
Smart Array E500 Controller	
HP Smart Array E500/256MB Controller	435129-B21
Smart Array P400 Controller	
HP Smart Array P400/512MB BBWC Controller  NOTE: Supports RAID 0/1/1+0/5/6.	411064-B21
HP Smart Array P400/256MB Controller  NOTE: Supports RAID 0/1/1+0/5.	405132-B21
512MB Battery-backed cache (BBWC) upgrade  NOTE: for Smart Array P400 Controller.	405148-B21
Battery-backed write cache (BBWC) upgrade  NOTE: for Smart Array P400 Controller.	383280-B21
Smart Array P400 Battery Attach Kit  NOTE: This option kit contains a 24" battery cable and adhesive material for nstalling a battery into the server if a Smart Array P400 is integrated outside of the factory. For all solutions, please refer to the server QuickSpecs and User's Manual for detailed installation instructions.	417836-B21
Smart Array P600 Controller	
HP Smart Array P600/256 BBWC Controller  NOTE: Supports external drive attach.	337972-B21
512MB Battery-backed write cache (BBWC) upgrade  NOTE: For Smart Array P600 Controller.	372538-B21
Smart Array P800 Controller	
HP Smart Array P800/512 BBWC Controller  NOTE: Supports external drive attach.	381513-B21
NOTE: Please see the following QuickSpecs additional information: http://h18000.www1.hp.com/products/quickspecs/12460_div/12460_div.html (Smart Array E200 Controller) http://h18000.www1.hp.com/products/quickspecs/12700_div/12700_div.html (Smart Array E500 Controller) http://h18000.www1.hp.com/products/quickspecs/12400_div/12400_div.html (Smart Array P400 Controller) http://h18000.www1.hp.com/products/quickspecs/12247_div/12247_div.html (Smart Array P600 Controller)	
http://h18000.www1.hp.com/products/quickspecs/12616_div/12616_div.html (Smart Array P800 Controller)	
SAS HBA	
HP SC44Ge Host Bus Adapter	416096-B21
HP 8 Internal Port SAS HBA with RAID	347786-B21
NOTE: Please see the HBA QuickSpecs for additional information: http://h18004.www1.hp.com/products/quickspecs/12617_div/12617_div.html (SC44Ge HBA)	
http://h18004.www1.hp.com/products/quickspecs/12332_div/12332_div.html (8 Internal Port SAS HBA)	
SCSI Controllers for External Drive/Storage Support	
Smart Array 6402/128 Controller NOTE: Ultra320 SCSI.	273915-B21



# **Options**

	Smart Array 6404/256 Controller NOTE: Ultra320 SCSI.	273914-B21
	Smart Array 642 Controller NOTE: Ultra320 SCSI.	291967-B21
	128MB Battery-Backed Write Cache (BBWC)  NOTE: Supports the Smart Array E200 Controller, Smart Array 641 Controller, and Smart Array 642 Controller.	351580-B21
	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
	SCSI HBA	
	HP SC11Xe Host Bus Adapter  NOTE: Supports external drive attach.	412911-B21
	NOTE: Please see the following Controller or SCSI Adapter QuickSpecs for Technical Specifications such as PCI Bus, PCI Peak Data Transfer Rate, SCSI Protocols supported, SCSI Peak Data Transfer Rate, Channels, SCSI Ports, Drives supported, Cache, RAID support, and additional information: http://h18000.www1.hp.com/products/quickspecs/11943_div/11943_div.html (Single Channel Ultra320 SCSI HBA) http://h18000.www1.hp.com/products/quickspecs/11587_div/11587_div.html (Smart Array 6400 Series) http://h18000.www1.hp.com/products/quickspecs/12069_div/12069_div.html (Smart Array 642) http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html (SC11Xe HBA)	
Communications	HP NC110T PCI Express Gigabit Server Adapter NOTE: Does not support Windows 2000.	434905-B21
	HP NC360T PCI Express Dual Port Gigabit Server Adapter	412648-B21
	HP NC364T PCI Express Quad Port Gigabit Server Adapter NOTE: Does not support Windows 2000.	435508-B21
	HP NC373F PCI Express Multifunction Gigabit Server Adapter	394793-B21
	HP NC373T PCI Express Multifunction Gigabit Server Adapter	394791-B21
	HP NC380T PCI Express Dual Port Multifunction Gigabit Server Adapter	394795-B21
	HP NC510F PCIe 10 Gigabit Server Adapter  NOTE: A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510F adapter.	414126-B21
	HP NC510C PCIe 10 Gigabit Server Adapter  NOTE: A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510C adapter.	414129-B21
	HP NC7170 PCI-X Dual Port 1000T Gigabit Server Adapter	313881-B21
	HP NC7771 PCI-X 1000T Gigabit Server Adapter	290563-B21
	Agere 06 PCI Hi-Speed 56K SftMd	440519-B21



	THE TREE MESON	Ochiciation
Options		
Redundant Options	Hot Plug Redundant Power Supply 350/370/380 G5 AU Kit	399771-011
•	Hot Plug Redundant Power Supply 350/370/380 G5 EU Kit	399771-021
	Hot Plug Redundant Power Supply 350/370/380 G5 JP Kit	399771-291
	Hot Plug Redundant Power Supply 350/370/380 G5 Worldwide Kit	399771-B21
	Hot Plug Redundant Power Supply 350/370/380 G5 UK Kit	399771-031
	Hot Plug Redundant Power Supply 350/370/380 G5 US Kit	399771-001
	Redundant Fan ML350 G5 Kit	409579-B21
Tape Drives	NOTE: For the complete listing of Tape Drive offerings, please see: http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html	
	USB Tape Drives	
	HP StorageWorks 1U USB Rack-Mount Kit with one DAT 160 USB drive	AG703A
	SAS Tape Drives NOTE: For the ML350 G5, HP recommends purchasing the HP SC44Ge HBA (416096-B21) for a dedicated SAS HBA for tape.	
	HP StorageWorks LTO-2 Ultrium 448 SAS Internal Tape Drive	DW085A
	HP StorageWorks LTO-3 Ultrium 920 SAS Internal Tape Drive	EH847A
	<b>NOTE:</b> Please refer to the "Tape Drives, Tape Autoloaders & Tape Libraries" table in the Storage section of this document for a list of SAS controllers with tape support.	
	Ultrium Tape Drives	
	HP StorageWorks LTO-1 Ultrium 232 Internal Tape Drive (Carbonite)	DW064A
	HP StorageWorks LTO-2 Ultrium 460 Internal Tape Drive (Carbon)	Q1518B
	HP StorageWorks LTO-2 Ultrium 448 SCSI Internal Tape Drive (Carbonite)	DW016A
	HP StorageWorks LTO-3 Ultrium 920 SCSI Internal Tape Drive	EH841A
	HP StorageWorks LTO-3 Ultrium 960 Internal Tape Drive (Carbonite)	Q1538A
	HP StorageWorks LTO-4 Ultrium 1840 SCSI Internal Tape Drive	EH853A
	NOTE: Please see the HP StorageWorks LTO Ultrium Tape Drive QuickSpecs for additional options such as controllers, media, and other related items: http://h18006.www1.hp.com/products/quickspecs/11739_div/11739_div.html (Worldwide) http://h18006.www1.hp.com/products/quickspecs/12128_div/12128_div.html (Worldwide)	
	For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: http://www.hp.com/go/connect	
	Rack-Mount Tape Drive Enclosures	
	HP StorageWorks 1U SCSI Rack-Mount kit  NOTE: The 1U Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with multiple Single-Ended and LVD SCSI tape drives including the DAT 40, DAT 72, DAT 160, DLT VS160, LTO-1 Ultrium 232, LTO-2 Ultrium 448 and LTO-3 Ultrium 920 tape drives.	A7445B
	HP StorageWorks 1U USB Rack-Mount Kit  NOTE: The 1U USB Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with the DAT 40 USB, DAT 72 USB and DAT 160 tape drives.	A8007A
	HP StorageWorks 1U SAS Rack-Mount Kit  NOTE: The 1U SAS Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with the LTO-2 Ultrium 448 SAS and LTO-3 Ultrium 920 SAS	AE459A



tape drives.

# **Options**

HP StorageWorks 3U Rack-mount kit

274338-B22

**NOTE:** The 3U Rack-mount Kit can support up to (2) full-height or (4) half-height tape drives and compatible with multiple LVD SCSI tape drives including DAT 40, DAT 72, DLT VS160, SDLT 600, LTO-1 Ultrium 232, LTO-2 Ultrium 460, LTO-2 Ultrium 448, LTO-3 Ultrium 920, LTO-3 Ultrium 960 and LTO-4 Ultrium 1840 tape drives.

**NOTE:** Please see the Rack-Mount Tape Drive Kits QuickSpecs for additional information regarding these kits:

http://h18000.www1.hp.com/products/quickspecs/10854\_div/10854\_div.html

(Worldwide)

# HP D2D Backup System

HP StorageWorks D2D110 Backup System

EH880A

**NOTE:** 1TB of Disk Storage

HP StorageWorks D2D110 Backup System with Data Protector Express

EH923A

Software Kit

NOTE: 1TB of Disk Storage

HP StorageWorks D2D120 Backup System

EH884A

NOTE: 2TB of Disk Storage

HP StorageWorks D2D120 Backup System with Data Protector Express

EH924A

Software Kit

NOTE: 2TB of Disk Storage

NOTE: Please see the HP D2D Backup Systems QuickSpecs for additional

nformation:

http://h18000.www1.hp.com/products/quickspecs/12651\_div/12651\_div.html

(Worldwide)

### **Tape Autoloaders**

# **HP StorageWorks DAT Autoloader**

HP StorageWorks DAT 72x10 tape autoloader AE313B

**HP StorageWorks 1/8 Tape Autoloader** 

HP StorageWorks 1/8 LTO-3 Ultrium 920 G2 Tape Autoloader AH165A HP StorageWorks 1/8 G2 LTO-3 Ultrium 920 SAS Autoloader AH558A

HP StorageWorks 1/8 LTO-2 Ultrium 448 G2 Tape Autoloader
HP StorageWorks 1/8 LTO-1 Ultrium 232 G2 Tape Autoloader

AH164A AH163A

HP StorageWorks 1/8 G2 Tape Autoloader Rack Kit **NOTE**: Required to install the 1/8 G2 Autoloaders in a standard 19-inch rack;

includes rails and rackmount instructions

AH166A

**NOTE:** Please reference the Tape Autoloader QuickSpecs at

http://www.hp.com/go/automation for additional information needed to create a

complete solution; reference current compatibility information at

http://www.hp.com/go/ebs



**Options** 

Tape Libraries	HP StorageWorks MSL2024 Tape Library	
	HP StorageWorks MSL2024 1 LTO-4 Ultrium 1840 SCSI Drive Library	AJ033A
	HP StorageWorks MSL2024 1 LTO-4 Ultrium 1840 4GB FC Library	AJ034A
	HP StorageWorks MSL2024 1 LTO-3 Ultrium 960 SCSI Drive Library	AG115A
	HP StorageWorks MSL2024 1 LTO-3 Ultrium 960 4GB FC Library	AG326B
	HP StorageWorks MSL2024 1 LTO-3 Ultrium 920 SAS Drive Library	AH559A
	HP StorageWorks MSL2024 1 LTO-3 Ultrium 920 SCSI Drive Library	AH169A
	HP StorageWorks MSL2024 1 LTO-2 Ultrium 448 SCSI Drive Library	AG116A
	HP StorageWorks MSL4048 Tape Library	
	HP StorageWorks MSL4048 1 LTO-2 Ultrium 448 SCSI Drive Library	AG320A
	HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SAS Drive Library	AH560A
	HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SCSI Drive Library	AH171A
	HP StorageWorks MSL4048 1 LTO-3 Ultrium 960 SCSI Drive Library	AG322A
	HP StorageWorks MSL4048 1 LTO-3 Ultrium 960 4GB FC Library	AG324B
	HP StorageWorks MSL4048 1 LTO-4 Ultrium 1840 SCSI Drive Library	AJ035A
	HP StorageWorks MSL4048 1 LTO-4 Ultrium 1840 4GB FC Library	AJ036A
	HP StorageWorks MSL8096 Tape Library	
	HP StorageWorks MSL8096 2 LTO-3 Ultrium 920 SAS Drive Library	AH561A
	HP StorageWorks MSL8096 2 LTO-3 Ultrium 960 4GB FC Library	AH218A
	HP StorageWorks MSL8096 2 LTO-3Ultrium 960 SCSI Drive Library	AH219A
	HP StorageWorks MSL8096 2 LTO-4 Ultrium 1840 SCSI Drive Library	AJ039A
	HP StorageWorks MSL8096 2 LTO-4 Ultrium 1840 4GB FC Library	AJ040A
	HP StorageWorks MSL6000 Tape Library	
	LTO-4 Ultrium 1840 technology	
	HP StorageWorks MSL6030 1 LTO-4 Ultrium 1840 SCSI Drive Library	AJ029A
	HP StorageWorks MSL6030 1 LTO-4 Ultrium 1840 4GB FC Library	AJ030A
	HP StorageWorks MSL6060 2 LTO-4 Ultrium 1840 SCSI Drive Library	AJ031A
	HP StorageWorks MSL6060 2 LTO-4 Ultrium 1840 4GB FC Library	AJ032A
	LTO-3 Ultrium 960 technology	
	HP StorageWorks MSL6030 1 LTO-3 Ultrium 960 Dr LVDS Library	AD606B
	HP StorageWorks MSL6030 1 LTO-3 Ultrium 960 Dr FC Library	AD608B
	HP StorageWorks MSL6030 2 LTO-3 Ultrium 960 Dr LVDS Library	AD607B
	HP StorageWorks MSL6030 2 LTO-3 Ultrium 960 Dr FC Library	AD609B

HP StorageWorks HP StorageWorks Modular Smart Array 20

335921-B21

**Modular Smart Array 20NOTE:** Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies.

**NOTE:** The Modular Smart Array Enclosure 20 Family supports the SATA 1.5Gb/s 3.5" Hot Plug Hard Drives.



0			

**HP StorageWorks** HP StorageWorks Modular Smart Array 30 SB 302969-B21 Modular Smart Array 30NOTE: Rack-mountable 14 drive enclosure with single bus, redundant power supplies HP StorageWorks Modular Smart Array 30 DB 302970-B21 NOTE: Rack-mountable 14 drive enclosure with dual bus, redundant power supplies **NOTE:** The Modular Smart Array Enclosure 30 Family supports the Wide Ultra3, Ultra320 Hot Plug Hard Drives. **HP StorageWorks** HP StorageWorks Modular Smart Array 50 Enclosure 364430-B21 Modular Smart Array 50<sub>NOTE</sub>: Please see the Modular Smart Array 50 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/guickspecs/12245 div/12245 div.html (Worldwide) **HP StorageWorks** HP StorageWorks 60 Modular Smart Array Enclosure 418408-B21 Modular Smart Array 60<sub>NOTE</sub>: Please see the Modular Smart Array 60 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/12627\_div/12627\_div.html (Worldwide) **HP StorageWorks** HP StorageWorks 70 Modular Smart Array Enclosure 418800-B21 Modular Smart Array 70<sub>NOTE</sub>: Please see the Modular Smart Array 70 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/guickspecs/12652 div/12652 div.html (Worldwide) 335880-B21 **HP StorageWorks** HP StorageWorks Modular Smart Array 500 Generation 2 **Modular Smart Array** NOTE: Please see the Modular Smart Array 500 Generation 2 QuickSpecs for 500 additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/guickspecs/11956 div/11956 div.html (Worldwide) **HP StorageWorks** HP StorageWorks Modular Smart Array 1000 201723-B22 **Modular Smart Array** NOTE: Please see the Modular Smart Array 1000 QuickSpecs for additional 1000 options and configuration information at http://h18000.www1.hp.com/products/quickspecs/11033\_div/11033\_div.html (Worldwide) **HP StorageWorks** Modular Smart Array 1500 Controller Shelf AA986A **Modular Smart Array** NOTE: Please see the StorageWorks Modular SAN Array 1500 cs QuickSpecs 1500 cs for additional options and configuration information at: http://www.hp.com/go/MSA1500cs



# **Options**

ProLiant Cluster Starter Kit  NOTE: For additional information regarding the ProLiant Cluster Starter Kit please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11935_div/11935_div.html	364023-B22
(Worldwide)	364026-B22
HP HA/F200 for Entry SAN Cluster  NOTE: For additional information regarding the ProLiant Cluster for Entry Level SAN please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11932_div/11932_div.html (Worldwide)	304020-622
<b>NOTE:</b> For configuration/certification options for the HP Parallel Database Cluster for Oracle RAC please go to: http://www.hp.com/solutions/highavailability/oracle	
HP Serviceguard for Linux ProLiant Cluster A.11.16 for SUSE SLES 9 & 10 and Red Hat EL 3 & 4 (2 node license cluster kit)	305199-B26
HP Serviceguard for Linux ProLiant Cluster, A.11.18 (2 license version - Red Hat EL 4&5, SUSE SLES10)	305199-B27
HP Serviceguard for Linux A.11.16 for SUSE SLES 9 & 10 and Red Hat EL 3 & 4 (single license version)	307754-B26
HP Serviceguard for Linux, A.11.18 (single license version - Red Hat EL 4&5, SUSE SLES10)	307754-B27
HP Serviceguard for Linux and Red Hat Global File System - 1 year subscription	T2798AA#001
HP Serviceguard for Linux and Red Hat Global File System - 3 years subscription	T2798AA#003
<b>NOTE:</b> For additional information regarding HP Serviceguard for Linux, please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11518_div/11518_div.html	
(Worldwide)  NOTE: For configuration/certification options for HP Serviceguard for Linux please go to: http://www.hp.com/info/sglx	

StorageWorks Options NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see:

http://h18006.www1.hp.com/storage/saninfrastructure/hba.html

HP StorageWorks FC2142SR 4Gb PCI-e HBA	A8002A
HP StorageWorks FC2242SR Dual Channel 4 Gb PCI-e HBA	A8003A
HP StorageWorks FC1142SR 4Gb PCI-e HBA	AE311A
HP StorageWorks FC1242SR Dual Channel 4 Gb PCI-e HBA	AE312A
HP StorageWorks FC2143 4Gb PCI-X 2.0 -to-Fibre Channel HBA	AD167A
HP StorageWorks FC2243 Dual Channel 4Gb PCI-X 2.0 HBA	AD168A
HP StorageWorks FC1143 4Gb PCI-X 2.0 HBA	AB429A
HP StorageWorks FC1243 Dual Channel 4Gb PCI-X 2.0 HBA	AE369A



Options		
Uninterruptible Power	HP, T1000 UPS NA	AF403A
Systems - Tower	HP, T1000 UPS JPN	AF404A
	HP, T1000 UPS INTL	AF405A
	HP, T1500 UPS NA	AF406A
	HP, T1500 UPS JPN	AF407A
	HP, T1500 UPS INTL	AF408A
	HP, R/T 2200 UPS NA	AF409A
	HP, R/T 2200 UPS JPN	AF410A
	HP, R/T 2200 UPS INTL	AF411A
Uninterruptible Power	HP, R1.5kVA UPS, 1U, NA	AF419A
Systems - Rack	HP, R1.5kVA UPS, 1U, INTL	AF418A
	HP, R1.5kVA UPS, 1U, JPN/TW	AF421A
	HP R3000 VA UPS, 2U, DTC, INTL	AF414A
	HP R3000 VA UPS, 2U, L5-30, NA	AF422A
	HP R3000 VA UPS, 2U, L6-20, NA	AF423A
	HP R3000 VA UPS, 2U, L6-20, JPN	AF424A
	HP R3000 VA UPS, 2U, L5-30, JPN	AF425A
	HP R5500 VA UPS, INTL	AF416A
	HP R5500 VA UPS, NA/JPN	AF426A
HP Monitored Power	HP Monitored Power Distribution Unit: Full Rack Version	
<b>Distribution Unit</b> (PDU)	17.3 kVA Monitored PDU Model S2324	AF503A
	8.6 kVA Monitored PDU Model S1324	AF504A
	16.6 kVA Monitored PDU Model S2140	AF505A
	8.3 kVA Monitored PDU Model S1140	AF506A
	22 kVA Monitored PDU Model S2316	AF507A
	11 kVA Monitored PDU Model S1316	AF508A
	14.7 kVA Monitored PDU Model S2132	AF509A
	7.3 kVA Monitored PDU Model S1132	AF510A
	4.9kVA Monitored PDU model S124	AF914A
	7.3kVA Monitored PDU model S132	AF915A



# **Options**

Options		
Modular PDUs 1U/0U	3.6kVA Model - mPDU, 16A, High (WW)	252663-B24
(Up to 32 outlets)	2.8 kVA Model - mPDU, 24A, Low (NA/JPN)	252663-D71
<b>NOTE:</b> 1U/0U mounting brackets shipped with	4.9kVA Model - mPDU, 24A, High (NA/JPN)	252663-D72
the unit (optimized for	7.3kVA Model - mPDU, 32A, High (INT'L)	252663-B31
10000 and 9000 series	8.3kVA Model - mPDU, 40A, High (WW)	252663-B21
racks).	8.3kVA Model - mPDU, 40A, High (power cord attached) (NA/JPN)	252663-D73
	9.2kVA Model - mPDU, 40A, High (power cord attached) (INTL)	252663-B32
	8.3kVA Model - mPDU 40A, High (core only) (NA/JPN)	252663-D75
	9.2kVA Model - mPDU 40 A, High (core only) (Int'I)	252663-B34
	8.3kVA Model - mPDU 32A, High (core only) (Int'l)	252663-B33
	4.9kVA Model - mPDU 24A, High (core only) (NA/JPN)	252663-D74
	<b>NOTE:</b> Please see the following Modular Power Distribution Unit (Zero-U/1U Modular PDUs) QuickSpecs for additional options including shorter jumper cables and country specific power cords: http://h18000.www1.hp.com/products/quickspecs/11041_div/11041_div.html (Worldwide)	
USB Options	HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	DC172B
	USB 1.44-MB External Diskette Drive (Carbonite)	DC141B
	HP USB 04 Standard Keyboard	DT528A# ABA
	HP 1GB USB 2.0 Floppy Drive Key	442085-B21
	HP 256MB USB 2.0 Floppy Drive Key	442084-B21
Rack Conversion Kit	HP ML350 G5 Tower to Rack Conversion Kit	412640-B21
	ProLiant DL380 G4, ML370 G4, ML350 G4 Shipping Bracket for Round Hole Racks  NOTE: This kit is required if the server will be configured and shipped within a round hole rack.	371482-B21
HP Rack 5000 Series	HP 5642 Rack-Unassembled	358254-B21
(Graphite Metallic)	<b>NOTE:</b> Please see the HP Rack 5642 QuickSpecs for additional part numbers at Specifications such as height, width, depth, weight, and color: http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.html	nd Technical

http://h18000.www1.hp.com/products/quickspecs/12074\_div/12074\_div.html

(Worldwide)

**NOTE:** For additional information regarding Rack Cabinets, please see the following URL:

http://www.hp.com/go/rackandpower.



### **Options**

<b>HP Rack</b>	10000	G2
Series		

(Carbon/Graphite Metallic)

10642 G2 (42U) Rack Cabinet - Pallet	AF001A
10642 G2 (42U) Rack Cabinet - Shock Pallet	AF002A
10642 G2 (42U) Rack Cabinet - Crated	AF003A
10642 G2 (42U) Rack Cabinet, with Extension - Shock Pallet	AF004A
10636 G2 (36U) Rack Cabinet - Pallet	AF011A
10636 G2 (36U) Rack Cabinet - Shock Pallet	AF012A
10636 G2 (36U) Rack Cabinet - Crated	AF013A
10636 G2 (36U) Rack Cabinet, with Extension - Shock Pallet	AF014A
10622 G2 (22U) Rack Cabinet - Pallet	AF021A
10622 G2 (22U) Rack Cabinet - Shock Pallet	AF022A
10842 G2 (42U) 800mm Wide Rack Cabinet - Pallet	AF041A
10842 G2 (42U) 800mm Wide Rack Cabinet - Shock Pallet	AF042A
10647 G2 (47U) Rack Cabinet - Pallet	AF031A

**NOTE:** It is mandatory to use a shock pallet when shipping racks with equipment installed.

**NOTE:** Please see the Rack 10000 G2 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:

http://h18000.www1.hp.com/products/quickspecs/12402\_div/12402\_div.html (Worldwide)

**NOTE:** For additional information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower.

# HP Rack 10000 Series (Graphite Metallic)

HP S10614 (14U) Rack Cabinet - Shock Pallet

**NOTE:** xxxxxx-B22 (shock pallet) used to ship racks with equipment installed (by custom systems, VARs and Channels).

**NOTE:** It is mandatory to use a shock pallet in order to ship racks with equipment installed. Not all equipment is qualified to be shipped in the Rack 10000 series.

**NOTE:** Please see the Rack 10000 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:

http://h18000.www1.hp.com/products/quickspecs/10995\_div/10995\_div.html (Worldwide)

**NOTE:** For additional information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower



292302-B22

# **Options**

Keyboards and **Monitors** 

TFT7210R Rack Mounted 17" Monitor	348373-B21
TFT7600 Rackmount Keyboard Monitor US	AG052A
TFT7600 Rackmount Keyboard Monitor UK	AG053A
TFT7600 Rackmount Keyboard Monitor GR	AG054A
TFT7600 Rackmount Keyboard Monitor FR	AG055A
TFT7600 Rackmount Keyboard Monitor IT	AG056A
TFT7600 Rackmount Keyboard Monitor SP	AG057A
TFT7600 Rackmount Keyboard Monitor DEN	AG058A
TFT7600 Rackmount Keyboard Monitor NOR	AG059A
TFT7600 Rackmount Keyboard Monitor SE/FI	AG060A
TFT7600 Rackmount Keyboard Monitor SWI	AG061A
TFT7600 Rackmount Keyboard Monitor PORT	AG062A
TFT7600 Rackmount Keyboard Monitor BEL	AG063A
TFT7600 Rackmount Keyboard Monitor JPN2	AG064A
TFT7600 Rackmount Keyboard Monitor RUS	AG065A
TFT7600 Rackmount Keyboard Monitor INTL	AG066A
1U Rackmount Keyboard with USB, US	AG072A
1U Rackmount Keyboard with USB, UK	AG073A
1U Rackmount Keyboard with USB, GR	AG074A
1U Rackmount Keyboard with USB, FR	AG075A
1U Rackmount Keyboard with USB, ITL	AG076A
1U Rackmount Keyboard with USB, SP	AG077A
1U Rackmount Keyboard with USB, DEN	AG078A
1U Rackmount Keyboard with USB, NOR	AG079A
1U Rackmount Keyboard with USB, SE/FI	AG080A
1U Rackmount Keyboard with USB, SWI	AG081A
1U Rackmount Keyboard with USB, PORT	AG082A
1U Rackmount Keyboard with USB, BEL	AG083A
1U Rackmount Keyboard with USB, JPN2	AG084A
1U Rackmount Keyboard with USB, RUS	AG085A
1U Rackmount Keyboard with USB, INTL	AG086A
NOTE: For additional information regarding Rack Options, please see the	

following URL: http://www.hp.com/go/rackandpower.



Options		
HP KVM Switch	2x1x16 IP Console Switch with Virtual Media	AF601A
Options	4x1x16 IP Console Switch with Virtual Media	AF602A
	2x16 Server Console Switch with Virtual Media	AF600A
	PS/2 Virtual Media Interface Adapter, 1 pack	AF604A
	NOTE: Requires PS/2 and one USB port on server.	
	Server Console Switch (KVM), 0 x 1 x 8 port	336044-B21
	Server Console Switch (KVM), 0 x 2 x 16 port	336045-B21
	PS/2 Interface Adapter, 1 pack	262588-B21
	PS/2 Interface Adapter, 8 pack	262587-B21
	USB Interface Adapter, 1 pack	336047-B21
	Serial Interface adapter - 1 Pack with power supply	373035-B21
	<b>NOTE:</b> Cat5e cables are required to connect Interface Adapters to Console Switches. Cat5e cables can be found at the following URL: http://www.hp.com/go/kvm.	
	HP 1x4 Console Switch	AF611A
	PS2 Server Console Cable, 6 ft, 2 pack	AF612A
	USB Server Console Cable, 6 ft, 2 pack	AF613A
	<b>NOTE:</b> For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm.	
HP Serial Console	HP 16 Port Serial Console Server (worldwide)	AF101A
Server Options	HP 48 Port Serial Console Server (worldwide)	AF102A
	Serial Adapter, RJ45-DB9 DCE Female, 1 Pack	AF103A
	Serial Adapter, RJ45-DB9 DCE Female, 8 Pack	AF110A
	<b>NOTE:</b> Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: http://www.hp.com/go/kvm.	
	<b>NOTE:</b> For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm.	
Service and Support	Hardware Services On-site Service	
Offerings (HP Care	4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years (Electronic)	U4512E
Pack Services)	4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years (Electronic)	U4513E
	6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years (Electronic)	U4514E
	O/S and Hardware Installation	
	Hardware Installation (Electronic)	U4522E
	Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays. (Electronic)	U4523E



**Support Plus** 

HP holidays. (Electronic)

Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. U4524E

# **Options**

### Support Plus 24

Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic

U4525E

Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic

U6308E

Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic

U8330E

**NOTE**: For more information, customer/resellers can contact http://www.hp.com/services/carepack



## Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

### **HP ProLiant ML350 G5 Memory Configuration**

The HP ProLiant ML350 G5 requires memory interleaving when more than one DIMM is installed. For interleaving, DIMMs must be configured in identical pairs. The system will not boot properly if multiple DIMMs of varying density or type are installed in the system.

### **Standard Memory**

All HP ProLiant ML350 G5 models ship with PC2-5300 Fully Buffered DIMMs (DDR2-667).

Entry models include a single 512 MB DIMM (Dual-Core) or two 512MB DIMMs (Quad-Core).

Base models include two 512 MB DIMMs (1 GB total memory).

Factory Integrated Models include the memory capacity of your choice.

## **Common Memory Configuration**

Valid DIMM pair combinations use slots 1/5, slots 2/6, slots 3/7, and slots 4/8. Maximum supported memory is 16 GB for Dual-Core and 32 GB on Quad-Core models.

**NOTE:** Charts does not represent all possible memory configurations.

Memory					SI	ot			
		1A	2B	3C	4D	5A	6B	7C	8D
Standard	1 GB	512 MB	Empty	Empty	Empty	512 MB	Empty	Empty	Empty
Optional	13 GB	512 MB	2 GB	2 GB	2 GB	512 MB	2 GB	2 GB	2 GB
Maximum	32 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB

Following are memory options available from HP:

cheving are memory options available nem in .	
• 512MB FBD PC2-5300 1 x 512 MB Kit	413507-B21
• 1 GB FBD PC2-5300 2 x 512 MB Kit	397409-B21
• 2 GB FBD PC2-5300 2 x 1 GB Kit	397411-B21
<ul> <li>2 GB FBD PC2-5300 2 x 1 GB LP Kit</li> </ul>	461826-B21
<ul> <li>4 GB FBD PC2-5300 2 x 2 GB Kit</li> </ul>	397413-B21
<ul> <li>4 GB FBD PC2-5300 2 x 2 GB LP Kit</li> </ul>	461828-B21
• 8 GB FBD PC2-5300 2 x 4 GB Kit	397415-B21

### Online spare memory configuration

FBDIMMs can either be single-rank or dual-rank. Certain FBDIMM configuration requirements are based on these classifications. A dual-rank FBDIMM is similar to having two separate FBDIMMs, or ranks, on the same module. Although only a single FBDIMM module, a dual-rank FBDIMM acts as two separate FBDIMMs.

In online spare mode, a single rank of memory acts as the spare memory. For single-rank FBDIMMs, the entire FBDIMM acts as the spare memory. For a dual-rank FBDIMM, only half of the FBDIMM acts as the spare memory while the other half is available for operating system and application usage.

Online spare FBDIMM configuration requirements (in addition to general configuration requirements):

- When only bank A is being used, it must be fully populated with dual-rank FBDIMMs.
- For optimum memory usage, HP recommends all FBDIMMs be the same size with the same HP part number. If different sized FBDIMMs are used, a portion of the installed memory may not be utilized.

In online spare mode, FBDIMMs must be populated as specified in the following table:

- Configuration 1 (Bank A only) is only supported if using bank A, populated with dual-rank FBDIMMs.
- After installing FBDIMMs, use RBSU to configure the system for online spare memory support.

Bank A	Bank B	Bank C	Bank D
1A and 5A	2B and 6B	3C and 7C	4D and 8D




Memory

X	_	_	_
X	X	_	_
Х	X	Х	Х



# Storage

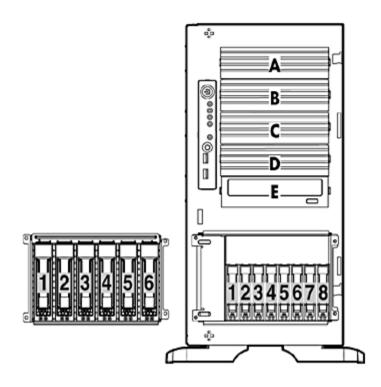

1 - 6	6 x 3.5" (LFF) Hot-Plug SAS/SATA hard drive bays
Or	
1 - 8	8 x 2.5" (SFF) Hot-Plug SAS/SATA hard drive bays
A,B,C,D	Available half height media bays
E	Optical Drive

# **Drive Support**

	Quantity Supported	Position Supported	Controller
Removable Media			
1.44-MB Diskette Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller
IDE (ATAPI) CD-ROM Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller
HP DVD±R/RW 16X Half Height	Up to 1	A, B, C, D, E	Integrated SATA Controller
DVD-ROM Drive Option Kit	Up to 1	A, B, C, D, E	Integrated SATA Controller
HP Half-Height SATA DVD-ROM Optical Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller
HP Half-Height SATA DVD RW Optical Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller



# Storage

### **Hard Drives**

## 3.5" SATA Hot Plug Drives

	Quantity Supported	Position Supported	Controller
750GB 1.5G SATA 7.2K 500GB 1.5G SATA 7.2K 250GB 1.5G SATA 7.2K 160GB 1.5G SATA 7.2K 80GB 1.5G SATA 7.2K	·	1-6	HP Smart Array E200i/64MB Controller HP Smart Array E200i/128 BBWC Controller HP Smart Array E500/256MB Controller HP Smart Array P400/256MB Controller HP Smart Array P400/512MB BBWC Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller HP 6-Port SATA RAID Controller
SFF SATA Hot Plug Dri	ves		
	Quantity Supported	Position Supported	Controller
120GB 1.5G SATA 5.4K	Up to 8	1-8	HP Smart Array E200i/64MB Controller

120GB 1.5G SATA 5.4K Up to 8
60GB 1.5G SATA 5.4K
HP Smart Array E200i/64MB Controller
HP Smart Array E500/256MB Controller
HP Smart Array P400/256MB Controller
HP Smart Array P400/512MB RPWC Control

HP Smart Array P400/512MB BBWC Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller

HP 6-Port SATA RAID Controller

**NOTE:** HP Systems Insight Manager should not be used to view the status of SATA hard drives and SATA RAID configurations.

# Hot Plug SFF SAS 2.5" Drives

	Quantity Supported	Position Supported	Controller
146GB 3G SAS 10K SP	Up to 8 SFF	1-8	HP Smart Array E200i/64MB Controller
146GB 3G SAS 10K DP	·		HP Smart Array E200i/128 BBWC Controller
72GB 3G SAS 10K SP			HP Smart Array E500/256MB Controller
72GB 3G SAS 10K DP			HP Smart Array P400/256MB Controller
72GB 3G SAS 15K SP			HP Smart Array P400/512MB BBWC Controller
72GB 3G SAS 15K DP			HP Smart Array P600/256 BBWC Controller
36GB 3G SAS 10K SP			HP Smart Array P800/512 BBWC Controller
36GB 3G SAS 15K SP			HP 6-Port SATA RAID Controller
36GB 3G SAS 15K DP			

#### Hot Plug SAS 3.5" Drives

Quantity Supported Supported Controller  300GB 3G SAS 15K 3.5" Up to 6 LFF SP	HOLFIUS SAS 3.5 DITV	<del>U</del> S		
SP  300GB 3G SAS 15K 3.5"  DP  HP Smart Array E500/256MB Controller  HP Smart Array P400/256MB Controller  HP Smart Array P400/512MB BBWC Controller  HP Smart Array P400/512MB BBWC Controller  HP Smart Array P600/256 BBWC Controller  HP Smart Array P600/256 BBWC Controller  HP Smart Array P800/512 BBWC Controller  HP Smart Array P800/512 BBWC Controller  HP 6-Port SATA RAID Controller  P2GB 3G SAS 15K 3.5"  SP  72GB 3G SAS 15K 3.5"  DP  36GB 3G SAS 15K 3.5"				Controller
	SP 300GB 3G SAS 15K 3.5 DP 146GB 3G SAS 15K 3.5 SP 146GB 3G SAS 15K 3.5 DP 72GB 3G SAS 15K 3.5" SP 72GB 3G SAS 15K 3.5" DP 36GB 3G SAS 15K 3.5"	· "	1-6	HP Smart Array E200i/128 BBWC Controller HP Smart Array E500/256MB Controller HP Smart Array P400/256MB Controller HP Smart Array P400/512MB BBWC Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller



# Storage

External Storage			
	Quantity Supported	Position Supported	Host Controller or Adapter
Modular Smart Array 20 Family	Up to 2	External	Smart Array 6402/128 Controller Smart Array 6404/256 Controller
Modular Smart Array 30 Family	Up to 2	External	Smart Array 6402/128 Controller Smart Array 6404/256 Controller Smart Array 642 Controller
Modular Smart Array 50 Enclosure	Up to 2	External	HP Smart Array P600/256 BBWC Controller
Modular Smart Array 500 G2	1	External	Please see the Modular Smart Array 500 or 500 G2 QuickSpecs for the latest list of supported HBAs: http://www.hp.com/go/msa500.
Modular Smart Array 1500 cs or 1000	Please see the Modular Smart Array 1500 cs or Modular Smart Array 1000 QuickSpecs links to determine configuration requirements		Please see the Modular Smart Array 1000 QuickSpecs for the latest list of supported HBAs: http://www.hp.com/go/MSA1000 Please see the Modular Smart Array 1500 cs QuickSpecs for the latest list of supported HBAs: http://www.hp.com/go/MSA1500cs

### Tape Drives, Tape Autoloaders, Tape Libraries & D2D Backup

**NOTE:** For an up-to-date listing of the latest O/S Support details for each of the Tape Drives listed below, please see the following:

http://h18000.www1.hp.com/products/quickspecs/division/10233.html (Worldwide)

**NOTE**: For an up-to-date listing of the latest O/S Support details for each of the Tape Autoloaders and Tape Libraries listed below, please see the following:

http://h18000.www1.hp.com/products/quickspecs/division/10809.html (Worldwide)

**NOTE:** For complete listing of tape drive offerings see

http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html

**NOTE:** SAS Tape Drives: Connecting hard drive cage and SAS tape to the same SAS Controller using split cable (supplied with tape drive) deactivates 1 of the hard drive bays. Actual hard drive bay deactivated depends on where split cable plugs into SAS drive connector. Example: 3x SAS cable connector plugged into SAS drive connector (5-8) on the back of the hard drive cage would mean drive bay 8 is deactivated.

anno sago mouna moun am	- Day - 10 area.		
	Position Supported	Controller	Controller/HBA Option Kit Part Number
HP StorageWorks SCSI Tape Drives, Internal LTO-1 Ultrium 232 LTO-2 Ultrium 448 LTO-2 Ultrium 460 LTO-3 Ultrium 920 LTO-3 Ultrium 960 LTO-4 Ultrium 1840 DAT 40 DAT 72	Internal	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21



# Storage

DAT 160 DLT VS160 SDLT 600

HP StorageWorks SCSI Tape Drives, External LTO-1 Ultrium 232 LTO-2 Ultrium 448 LTO-2 Ultrium 460 LTO-3 Ultrium 920 LTO-3 Ultrium 960 LTO-4 Ultrium 1840 DAT 40 DAT 72 DAT 160 DLT VS160 SDLT 600 1U Rack-Mount Kit 3U Rack-Mount Kit	External	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
HP StorageWorks USB Tape Drives, Internal DAT 40 USB DAT 72 USB DAT 160 USB	Internal	USB 2.0 Port	N/A
HP StorageWorks USB Tape Drives, External DAT 40 USB DAT 72 USB DAT 160 USB 1U USB Rack-Mount Kit	External	USB 2.0 Port	N/A
HP StorageWorks SAS	External	HP SC44Ge Host Bus Adapter	416096-B21
Tape Drives, Internal LTO-2 Ultrium 448 SAS		NOTE: Recommended.  HP Smart Array E500 Controller	435129-B21
LTO-3 Ultrium 920 SAS		NOTE: The following SAS Smart Array controllers require ROM Flash version 2.04 or higher for SAS tape support:	400120 021
		HP Smart Array P400/256MB Controller	405132-B21
		HP Smart Array P400/512MB Controller	411064-B21
HP StorageWorks SAS Tape Drives, External	External	HP SC44Ge Host Bus Adapter NOTE: Recommended.	416096-B21
LTO-2 Ultrium 448 SAS		HP Smart Array E500 Controller	435129-B21
LTO-3 Ultrium 920 SAS 1U Rack-Mount Kit		<b>NOTE:</b> The following SAS Smart Array controllers require ROM Flash version 2.04 or higher for SAS tape support:	
		HP Smart Array P400/256MB Controller	405132-B21
		HP Smart Array P400/512MB Controller	411064-B21
HP StorageWorks SCSI Tape Automation, External DAT 72x10 Autoloader	External	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21



# Storage

1/8 G2 Tape Autoloader

MSL2024

MSL4048

MSL8096

MSL6000

**HP StorageWorks SAS** 

Tape Automation,

**External** 

1/8 G2 Autoloader

MSL2024 MSL4048

MSL8096

**HP StorageWorks Fibre** 

Tape Automation,

**External** 

MSL2024

MSL4048

MSL6000

External

External

Please consult the EBS connectivity matrix at

http://www.hp.com/go/ebs for detailed connectivity information.

NOTE: Please visit http://www.hp.com/go/connect for details about minimum SAS controller firmware version and SAS

N/A

416096-B21

**HP StorageWorks D2D** 

**Backup Systems** 

D2D110 D2D120 External

**Embedded Network Controller** 

HP SC44Ge Host Bus Adapter

cabling requirements.

N/A



# **Power Specifications**

Part Number380622-001Spare Kit403781-001Operational Input Voltage Range90 - 264

(V rms)

**Frequency Range (Nominal) (Hz)** 47 - 63 (50 / 60)

Nominal Input Voltage (Vrms)	100	120	208	220	230	240
Max Rated Output Wattage Rating	800	950	1000	1000	1000	1000
Nominal Input Current (A rms)	10.0	8.8	5.85	5.5	5.2	4.97
Max Rated Input Wattage Rating (Watts)	980	1035	1193	1186	1172	1169
Max. Rated VA (Volt-Amp)	1000	1056	1217	1210	1196	1193
Efficiency (%)	81.5	82	84	84	85	85.5
Power Factor	0.98	0.98	0.98	0.98	0.98	0.98
Leakage Current (mA)	0.44	0.52	0.91	0.96	1.00	1.04
Maximum Inrush Current (A peak)	30	30	30	30	30	30
Maximum Inrush Current duration (miliseconds)	3	3	3	3	3	3

### NOTES:

**ActiveAnswers Power Calculation** 

Power calculator is LIVE on ActiveAnswers Web site. This is an external link. Follow this link: http://h30099.www3.hp.com/configurator/powercalcs.asp

### To drill down to calculators:

- Click on: "ProLiant Servers"
- Click on the Server of interest. Example: ML350 G5
- Click on: "Power Calculator" link. (You may need to scroll down to see it)



# Technical Specifications

ystem Unit Tower Dimensions	18.39 x 8.59 x 23.46 in (46.7 x 21.8 x 59.6 cm)	)
-----------------------------	---	---

(H x W x D) (with feet/bezel)

**Rack Dimensions** 8.54 x 17.5 x 21.9 in. (21.7 x 44.5 x 55.7cm)

(H x W x D) (with feet/bezel)

Requirements

**Tower Weight** Maximum 67 lb (30.4 kg)

(approximate) (all hard drives, power supplies, and processors

installed)

Minimum 50 lb (22.7 kg)

(one hard drive, power supply, and processor

installed)

Rack Weight Maximum 61 lb (27.7 kg)

(approximate) (all hard drives, power supplies, and processors

installed)

Minimum 44 lb (20.0 kg)

(one hard drive, power supply, and processor

installed)

Max Input Rated Line Voltage 100 VAC, 120 VAC

200 - 240 VAC

(per power supply) Rated Input Current 10A (at 100 VAC) 9A (at 120 VAC)

9A (at 120 VAC) 6.1A (at 200 VAC)

Rated Input Frequency 50 to 60 Hz

Rated Input Power 980W (at 100 VAC)

1035W (at 120 VAC) 1170W (at 240 VAC)

BTU Rating BTU/HR 3350 BTU/hr (at 100 VAC)

3530 BTU/hr (at 120 VAC) 3990 BTU/hr (at 240 VAC)

**Power Specifications** To review typical system power ratings use the Power Calculator which

is available via the online tool located at URL:

http://h30099.www3.hp.com/configurator/calc/Power%

20Calculator%20Catalog.xls

- Click on the system of interest. Example: ML350 G5

- Follow the instructions of the next screens.

**Power Supply Output** 

(per power supply)

**Temperature** 

Rated Steady-State 80 Power 85

800 W (at 100 VAC) 850 W (at 120 VAC)

1000 W (at 200-240 VAC)

Maximum Peak Power 800 W (at 100 VAC)

850 W (at 120 VAC) 1000 W (at 200-240 VAC)

System Inlet Operating

altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be

10° to 35°C (50° to 95°F) at sea level with an



# Technical Specifications

limited by the type and number of options

installed.

System performance may be reduced if operating with a fan fault or above 30°C

(86°F).

Non-operating -30° to 60°C (-22° to 140°F). Maximum rate of

change is 20°C/hr (36°F/hr).

**Relative Humidity** (non-condensing)

Operating 10 to 90% relative humidity (Rh), 28°C

(82.4°F) maximum wet bulb temperature, non-

condensing.

Non-operating 5 to 95% relative humidity (Rh), 38.7°C

(101.7°F) maximum wet bulb temperature,

non-condensing.

**Altitude** Operating

3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is

457 m/min (1500 ft/min).

9144 m (30,000 ft). Maximum allowable Non-operating

altitude change rate is 457 m/min (1500

ft/min).

**Acoustic Noise** Listed are the declared A-Weighted sound power levels (LWAd) and

declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA

74) and declared in accordance with ISO 9296 (ECMA 109).

Idle

L WAd 5.2 B

L pAm 35 dBA

Operating

L WAd 5.3 B

35 dBA L pAm

Smart Array E200i Controller

**Disk Drive and** 3G SAS (Serial Attached SCSI)

**Enclosure Interface** 1.5G SATA (Serial Advanced Technology Attachment)

**SAS Connectors** 2 internal (SFF8484) x4 wide port connectors

Cache Memory Speed DDR-1/266 MHz provides up to 4.2 GB/s maximum bandwidth.

Server Interface x4 2.5G PCIe provides 2GB/s maximum bandwidth. **SAS Speed** x8 3G SAS provides 2.4GB/s maximum bandwidth.

**Cache Memory** 40-bit 64MB ECC read cache or

40-bit 128MB ECC battery backed, transportable read/write cache

**Logical Volumes** Supported

Up to 32 logical volumes

**Maximum Volume** 

Capacity

4.5TB (6 x 750GB SATA)

**Host Memory** Addressing

64-bit, supporting greater than 4GB server memory space

**RAID Support** RAID 5 (Distributed Data Guarding)

RAID 1, 1+0 (Striping & Mirroring)

RAID 0 (Striping)

**Upgradeable Firmware** Upgradeable Firmware



# Technical Specifications

Embedded NC373i
<b>Multifunction Gigabit</b>
Server Adapter

Network Interface Compatibility

10Base-T/100Base-TX/1000Base-TX

IEEE 802.3 10Base-T

IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX

Data Transfer Method

PCI Express, four lanes (x4)

Network Transfer Rate 10Base-T (Half-Duplex) 10 Mb/s

10Base-T (Full-Duplex) 20 Mb/s 100Base-TX (Half- 100 Mb/s

Duplex)

100Base-TX (Full- 200 Mb/s

Duplex)

1000Base-TX (Half and

2000Mb/s

Full-Duplex)

Connector
Cable Support

RJ-45 10Base-T

10Base-T Categories 3, 4 or 5 UTP; up to 328 ft (100 m)

Category 5 UTP; up to 328 ft (100 m)

10/100/1000Base-TX

Environment-friendly Products and Approach

End-of-life Management and Recycling Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a>. To recycle your product, please go to: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2007 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.



Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com