



Overview

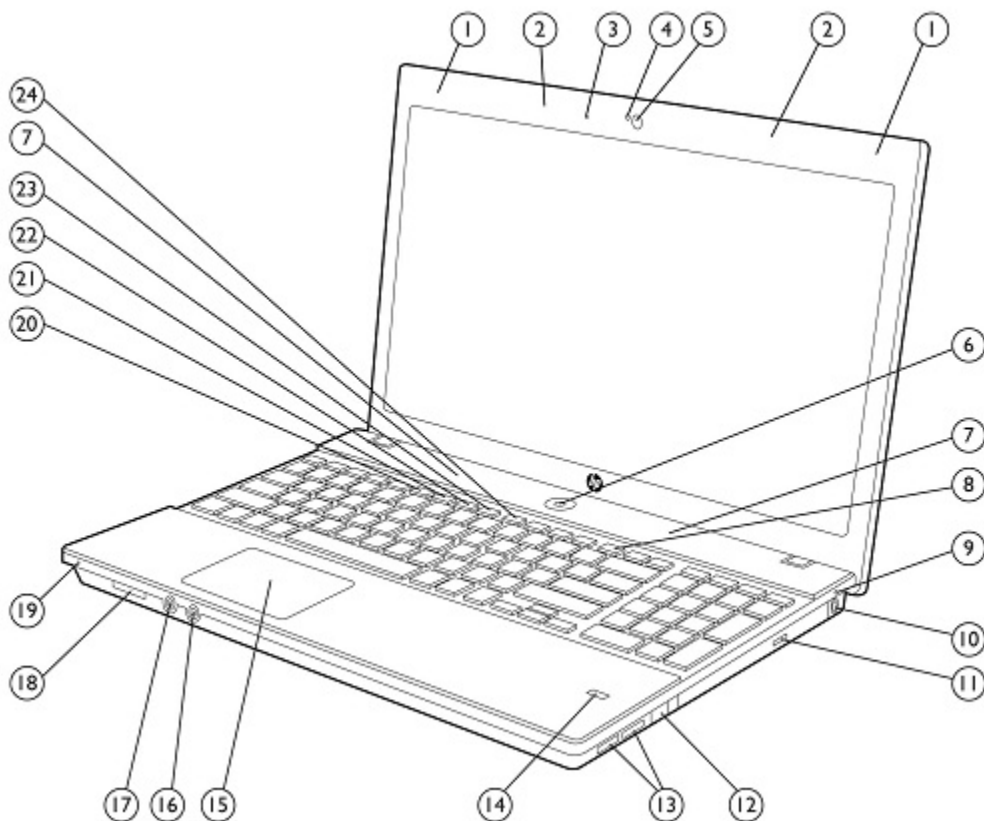


- | | |
|--|---|
| 1. WWAN antennas | 13. (2) USB 2.0 ports |
| 2. WLAN antennas | 14. Optional HP Fingerprint Sensor |
| 3. Integrated microphone | 15. ClickPad with left and right ClickPad buttons |
| 4. Webcam LED (works with optional webcam) | 16. Stereo microphone in |
| 5. Optional 2 MP webcam | 17. Stereo headphone/line out |
| 6. Power button with LED indicator | 18. Media Card Reader |
| 7. Stereo speakers | 19. Hard drive activity LED indicator |
| 8. Wireless switch with LED indicator | 20. HP QuickLook 3 button with LED indicator |
| 9. Battery charging LED indicator | 21. HP QuickWeb button with LED indicator |
| 10. Power connector | 22. Volume mute button |
| 11. Optical drive (select models) | 23. Volume down button |
| 12. Optional RJ-11/modem port | 24. Volume up button |

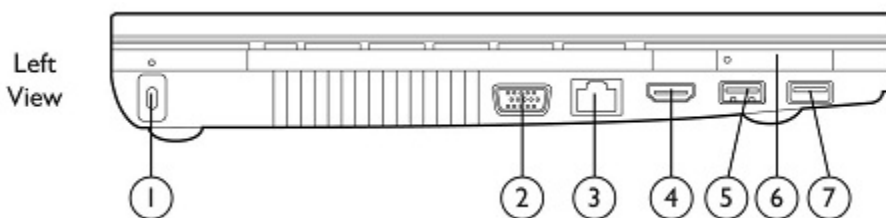

- | | |
|---|-------------------------|
| 1. Kensington Lock slot | 5. Combo eSATA/USB port |
| 2. VGA connector (external monitor/projector) | 6. ExpressCard/34 slot |
| 3. RJ-45/Ethernet port | 7. USB 2.0 port |
| 4. HDMI port | |

Overview

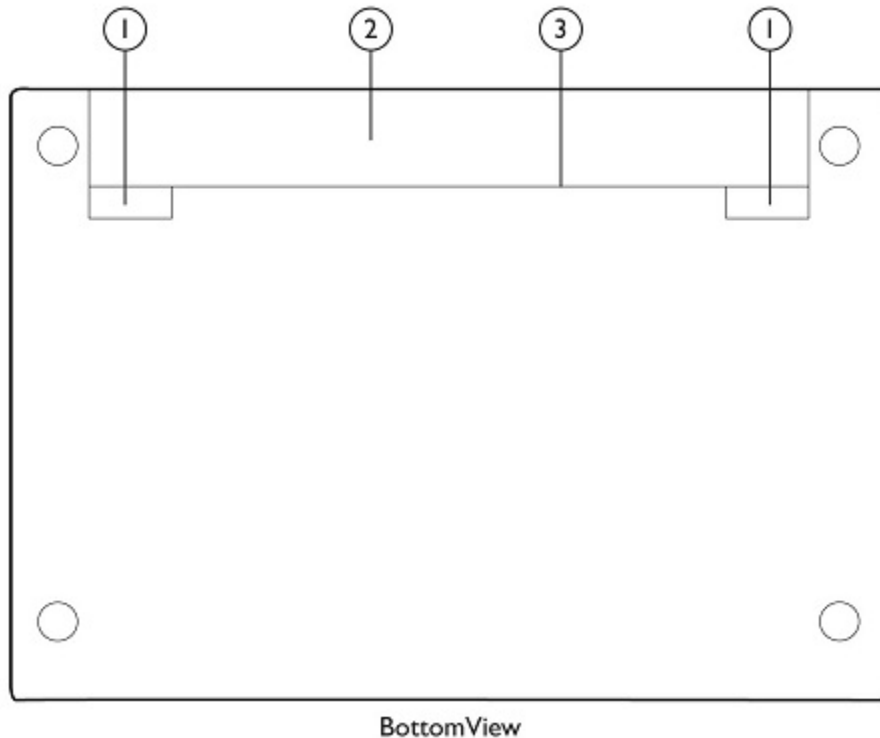

1. Battery release latches
2. Battery bay
3. SIM card slot (select units, located inside battery bay)

At A Glance

- Genuine Windows 7 versions, Genuine Windows Vista versions, Genuine Windows XP Professional available through downgrade rights from Windows 7 Professional, SUSE Linux, Red Flag Linux (PRC only), or FreeDOS
- Thin, lightweight design with brushed aluminum finish for durability and style
- Color choice of caviar or bourdeaux finish
- Full-sized spill-resistant keyboard with better spaced keys and full separate numeric keypad
- ATI Mobility Radeon HD 4350 discrete graphics with 512 MB dedicated video memory or integrated Intel HD Graphics
- ArcSoft TotalMedia Suite for playing, creating, and editing video and audio files
- New keyboard function keys for play, rewind, and fast-forward of video and audio files
- Corel Home Office productivity suite for word processing, spreadsheets, and presentations
- HDMI port for connecting to high-resolution displays; combo eSATA/USB port
- HP Face Recognition for HP ProtectTools for easy logins using the optional integrated 2 MP webcam
- Up to 500 GB 7200 rpm hard drive or 750 GB 5400 rpm hard drive with HP 3D DriveGuard protection
- HP Power Assistant to conserve power, increase battery run-time, monitor power needs, report workforce power consumption
- HP Quicklook 3 (quick access to e-mail, calendar, contacts and tasks), HP QuickWeb, HP DayStarter
- HP Connection Manager 3.1
- Flexible wireless connectivity options:
 - Integrated HP un2420 EV-DO/HSDPA Mobile Broadband Module* provides worldwide Gobi mobile Internet technology with GPS
 - Integrated Intel Centrino® Advanced-N 6200 802.11 a/b/g/n, Atheros 802.11 b/g/n, Broadcom 802.11 a/b/g/n or b/g wireless LAN module
 - Bluetooth® v2.1
- HP ProBook 4520s offers choice of 9-cell or 6-cell battery to customize weight and run-time to your needs
- Integrated Media Card Reader and ExpressCard/34 slot
- Widescreen LED-backlit HD display with 16:9 aspect ratio, BrightView optional

Overview

HP ProBook 4520s: 15.6-inch diagonal

HP ProBook 4720s: 17.3-inch diagonal

- Choice of an Intel® Core™ i7, Core i5, or Core i3 processor
- Enhanced security features including HP ProtectTools, HP Face Recognition, Computrace LoJack Pro ready, HP SpareKey, HP Disk Sanitizer, optional HP Fingerprint Sensor, and optional HP Privacy Filter
- Optional optical drives include Blu-ray ROM DVD+/-RW SuperMulti DL Drive for high-definition playback and DVD+/-RW SuperMulti DL LightScribe Drive for burning custom labels directly to your discs

* Only available with HP ProBook 4520s with Intel HD Graphics.

Standard Features (availability may vary by country)

Processors	Intel Core i7-620M Processor (2.66 GHz, 4 MB L3 cache)* Up to 3.33 GHz with Intel Turbo Boost Technology
	Intel Core i5-540M Processor (2.53 GHz, 3 MB L3 cache)* Up to 3.06 GHz with Intel Turbo Boost Technology
	Intel Core i5-520M Processor (2.4 GHz, 3 MB L3 cache)* Up to 2.93 GHz with Intel Turbo Boost Technology
	Intel Core i5-430M Processor (2.26 GHz, 3 MB L3 cache)* Up to 2.53 GHz with Intel Turbo Boost Technology
	Intel Core i3-350M Processor (2.26 GHz, 3 MB L3 cache)*
	Intel Core i3-330M Processor (2.13 GHz, 3 MB L3 cache)*

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

* Intel's numbering is not a measurement of higher performance.

Operating System	Preinstalled	Genuine Windows 7 Professional Edition 32* Genuine Windows XP Professional available through downgrade rights from Windows 7 Professional* † Genuine Windows 7 Home Premium Edition 32* Genuine Windows 7 Home Basic Edition 32* Genuine Windows 7 Starter Genuine Windows Vista Business 32** Genuine Windows Vista Home Basic 32** SUSE Linux Enterprise Desktop 11 Red Flag Linux (PRC only) FreeDOS
	Supported	Genuine Windows 7 Professional 64*
	Certified	SUSE Linux Enterprise Desktop 11

* System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See: <http://www.microsoft.com/windows/windows-7/> for details.

** Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereqs.aspx> and <http://www.microsoft.com/windowsvista/getready/capable.aspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

† Windows XP Professional is preinstalled on this system and includes end user rights and media for Windows 7 Professional. You may only use one version at a time. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

Chipset	Mobile Intel HM57 Express Chipset
---------	-----------------------------------

Standard Features (availability may vary by country)

Graphics	Integrated graphics (HP ProBook 4520s only): Intel HD Graphics						
	Discrete graphics: ATI Mobility Radeon HD 4350 graphics controller with 512 MB dedicated video memory Microsoft DirectX 10.1 (discrete), 10 (integrated) capable						
Display	<table border="0"> <tr> <td data-bbox="352 504 470 548">Internal</td> <td data-bbox="650 504 1481 761"> <p>HP ProBook 4520s: 15.6-inch diagonal LED-backlit HD anti-glare (1366 x 768 resolution) 15.6-inch diagonal LED-backlit HD BrightView (1366 x 768 resolution)</p> <p>HP ProBook 4720s: 17.3-inch diagonal LED-backlit HD+ anti-glare (1600x900 resolution) 17.3-inch diagonal LED-backlit HD+ BrightView (1600x900 resolution)</p> </td> </tr> <tr> <td data-bbox="352 828 470 873">External</td> <td data-bbox="650 784 1481 1131"> <p>Optional HP Privacy Filter</p> <p>Up to 32-bit per pixel color depth</p> <p>VGA port supports resolutions up to 1600 x 1200 at 75 Hz, and lower resolutions at up to 100 Hz.</p> <p>HDMI port supports direct connection to high-definition displays with up to 1920 x 1080 resolution and 7-channel audio with one convenient cable (not included).</p> <p>NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.</p> </td> </tr> </table>	Internal	<p>HP ProBook 4520s: 15.6-inch diagonal LED-backlit HD anti-glare (1366 x 768 resolution) 15.6-inch diagonal LED-backlit HD BrightView (1366 x 768 resolution)</p> <p>HP ProBook 4720s: 17.3-inch diagonal LED-backlit HD+ anti-glare (1600x900 resolution) 17.3-inch diagonal LED-backlit HD+ BrightView (1600x900 resolution)</p>	External	<p>Optional HP Privacy Filter</p> <p>Up to 32-bit per pixel color depth</p> <p>VGA port supports resolutions up to 1600 x 1200 at 75 Hz, and lower resolutions at up to 100 Hz.</p> <p>HDMI port supports direct connection to high-definition displays with up to 1920 x 1080 resolution and 7-channel audio with one convenient cable (not included).</p> <p>NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.</p>		
Internal	<p>HP ProBook 4520s: 15.6-inch diagonal LED-backlit HD anti-glare (1366 x 768 resolution) 15.6-inch diagonal LED-backlit HD BrightView (1366 x 768 resolution)</p> <p>HP ProBook 4720s: 17.3-inch diagonal LED-backlit HD+ anti-glare (1600x900 resolution) 17.3-inch diagonal LED-backlit HD+ BrightView (1600x900 resolution)</p>						
External	<p>Optional HP Privacy Filter</p> <p>Up to 32-bit per pixel color depth</p> <p>VGA port supports resolutions up to 1600 x 1200 at 75 Hz, and lower resolutions at up to 100 Hz.</p> <p>HDMI port supports direct connection to high-definition displays with up to 1920 x 1080 resolution and 7-channel audio with one convenient cable (not included).</p> <p>NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.</p>						
Memory	<table border="0"> <tr> <td data-bbox="352 1187 470 1232">Standard</td> <td data-bbox="650 1187 1481 1344"> <p>DDR3 PC3-10600 SDRAM (1333 MHz)*</p> <p>Two SODIMM slots supporting dual-channel memory</p> <p>1024 MB and 2048 MB SODIMMs</p> <p>Standard memory up to 4096 MB</p> </td> </tr> <tr> <td data-bbox="352 1344 470 1388">Maximum</td> <td data-bbox="650 1344 1481 1422"> <p>Upgradeable to 8192 MB with optional 4096 MB SODIMMs in slots 1 and 2</p> </td> </tr> <tr> <td data-bbox="352 1422 470 1467">Dual-channel</td> <td data-bbox="650 1422 1481 1500"> <p>Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.</p> </td> </tr> </table>	Standard	<p>DDR3 PC3-10600 SDRAM (1333 MHz)*</p> <p>Two SODIMM slots supporting dual-channel memory</p> <p>1024 MB and 2048 MB SODIMMs</p> <p>Standard memory up to 4096 MB</p>	Maximum	<p>Upgradeable to 8192 MB with optional 4096 MB SODIMMs in slots 1 and 2</p>	Dual-channel	<p>Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.</p>
Standard	<p>DDR3 PC3-10600 SDRAM (1333 MHz)*</p> <p>Two SODIMM slots supporting dual-channel memory</p> <p>1024 MB and 2048 MB SODIMMs</p> <p>Standard memory up to 4096 MB</p>						
Maximum	<p>Upgradeable to 8192 MB with optional 4096 MB SODIMMs in slots 1 and 2</p>						
Dual-channel	<p>Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.</p>						
	<p>* Memory speed is processor dependent.</p> <p>NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Full availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.</p>						

Standard Features (availability may vary by country)

Communications	<p>Realtek Ethernet (10/100/1000 NIC)*</p> <p>Optional 56K V.92 modem**</p> <p>* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.</p> <p>** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.</p>
----------------	---

Wireless Devices	<p>Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Mobile Broadband (WWAN) requires a Windows operating system and is available in select countries as a factory configurable feature for the HP ProBook 4520s only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.</p> <p>HP un2420 EV-DO/HSPA Mobile Broadband Module (available for HP ProBook 4520s with Intel HD Graphics only)</p> <p>Integrated mobile broadband module with Gobi global mobile Internet technology that provides connectivity to both CDMA (EVDO) and UMTS (HSPA) networks. It also provides GPS functionality for various mapping applications and security applications.</p> <p>NOTE: Separately purchased mobile network operator service is required.</p> <p>Two 850/900/1575/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.</p> <p>All 802.11 integrated wireless LAN options</p> <p>Wi-Fi certified*</p> <p>Wired Equivalent Privacy (WEP) support up to 128-bit keys</p> <p>Wi-Fi Protected Access (WPA) and WPA2 support</p> <p>802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP</p> <p>Advanced Encryption Standard (AES) support</p> <p>Dual antennas integrated in the display enclosure</p> <p>Intel Centrino Advanced N 6200 (2x2)</p> <p>Integrated support for 802.11a, b, g, and n*</p> <p>2 transmit, 2 receive antennas</p> <p>Up to 300 mbps data rate</p> <p>Atheros 9285G 802.11b/g/n (1x1)</p> <p>Integrated support for 802.11b, g, and n</p> <p>Up to 300 mbps data rate</p> <p>Broadcom 4322AGN 802.11a/b/g/n</p> <p>Integrated support for 802.11a, b, g, and n</p> <p>Cisco Compatible Extensions support</p> <p>Up to 300 mbps data rate</p> <p>WiFi Adapter</p> <p>Broadcom 4312G 802.11b/g</p> <p>Integrated support for 802.11 b and g</p> <p>Cisco Compatible Extensions support</p> <p>Up to 54 mbps data rate</p> <p>WiFi Adapter</p> <p>HP Integrated Module</p> <p>Bluetooth Specification v2.1 compliant with Bluetooth WirelessWorks with a wide range of Bluetooth devices</p> <p>Technology</p> <p>* In countries where 802.11n is not allowed, this capability is not enabled (Intel 802.11a/b/g only).</p>
------------------	--

Standard Features (availability may vary by country)

Keyboard The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and a drain system that funnels fluid through a hole in the bottom of the notebook. This minimizes the risk of damage to sensitive components underneath. The 101/102-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, full separate numeric keypad, and 12 function keys. US and International key layouts are available. Other features include hotkeys for instant access to power conservation and brightness, and 19.05 x 19.05 mm key pitch (center-to-center spacing).

Pointing device ClickPad with gestures support:
Two-finger scroll, zoom, pinch and pivot rotate

Expansion card slots ExpressCard/34 slot Supports ExpressCard/34 (34 mm x 75 mm x 5 mm) card sizes
Media Card Reader Supports SD (Secure Digital), MMC (MultiMedia Card), Memory Stick, Memory Stick Pro, Memory Stick Duo*, xD-Picture card
** Memory Stick Duo Adapters are required and sold separately. Inserting a Memory Stick Duo Card directly into your notebook could damage the memory card and/or notebook.*

Storage Internal Storage Device 250/320/500 GB 7200 rpm SMART SATA II Hard Drive
750 GB 5400 rpm SMART SATA II Hard Drive
NOTE: Up to 15 GB is reserved for the system recovery software.
HP 3D DriveGuard (Windows models only) The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.
Fixed optical drives Blu-ray ROM DVD+/-RW SuperMulti DL LightScribe Drive*
DVD+/-RW SuperMulti DL LightScribe Drive
DVD-ROM Drive
** Support for the Blu-ray DVD drive on configurations with integrated graphics requires Windows 7 or Windows Vista; configurations with discrete graphics support it with any offered Windows operating system.*

Standard Features (availability may vary by country)

Interfaces	VGA	One
	HDMI	One
	Stereo microphone in	One
	Stereo headphone/line out	One
	Power connector	One
	RJ-11/modem (optional)	One
	RJ-45/Ethernet	One
	Combo eSATA/USB 2.0	One
	USB 2.0	Three
	LED status indicators	Eight

Audio/Visual

High Definition Audio support
Integrated stereo speakers
Integrated digital microphone
Stereo headphone/line out
Stereo microphone in

Optional 2 MP webcam

- Supports videoconferencing and still image capture
- Improved quality for video streaming and still image capture (1600x1200 resolution)
- Up to 30 frames/sec
- Fixed focus lens
- 16-bit true color (camera sensor up to UXGA resolution)

Software

Preinstalled software with Windows Vista

- HP Recovery Manager (available with Windows 7 or Vista only)
- HP Support Assistant (available with Windows 7 or Vista only)
- HP ProtectTools Security Manager
- HP Face Recognition
- HP Quicklaunch Buttons Software
- HP QuickLook 3
- HP QuickWeb
- HP Power Assistant
- HP Connection Manager 3.1
- HP Wireless Assistant
- HP Day Starter
- Corel Home Office productivity suite 60-day trial
- Roxio Creator Business (select models)
- ArcSoft Total Media Suite
- Microsoft Office Professional 2007 60-day Convertible Trial
- McAfee Total Protection*
- Norton Online Backup
- HP Webcam Software (select models)
- Skype
- WinZip 12 trial

Additional software available from the web

- HP SoftPaq Download Manager

Standard Features (availability may vary by country)

* 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

HP Recovery Manager Models shipped with Windows 7 or Windows Vista include HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 15 GB of the hard drive is reserved for the system recovery software.

Security

Standard Features

HP ProtectTools Security Manager
Face Recognition for HP ProtectTools
One Step Login
Enhanced Pre-Boot Security
HP SpareKey
HP Disk Sanitizer
Setup Password
Kensington Lock Slot
Support for Computrace* LoJack Pro for HP ProtectTools

Optional Features

HP Fingerprint Sensor
HP Privacy Filter

* The Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription with terms ranging from one to five years.
For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

HP ProtectTools Security Manager HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. The following modules are available on the hard drive (also downloadable from the web) and can be configured in Software Setup:

- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools
- Drive Encryption for HP ProtectTools
- File Sanitizer for HP ProtectTools
- Privacy Manager for HP ProtectTools (Chat & Sign)
- Embedded Security for HP ProtectTools
- Computrace LoJack Pro for HP ProtectTools

HP ProtectTools is now centrally manageable with the capability to manage notebooks from a single point. Security is management ready out of the box, in partnership with Digital Persona. New features address requirements that customers expect from a centrally managed security solution such as user provisioning, credential reset, and credential revocation.

HP ProtectTools provides two separate management solutions, targeted at the enterprise and the SMB:

- Digital Persona Pro AD: Designed for the enterprise customer. Integrates with Active Directory and gives IT Managers the ability to provision users, create login policies based on passwords, biometrics or smartcards. Management features also include remote credential recovery in case the user forgets the password, loses the smartcard or cannot use the fingerprint reader for any reason. In addition, advanced auditing capabilities are also built in. Digital Persona Pro AD is available now.

Standard Features (availability may vary by country)

- Digital Persona Pro Workgroup: Designed for the small business customer. Provides features similar to the Active Directory version, but for workgroups. Workgroup activation is built into HP ProtectTools, and activation of up to 5 seats is completely free.

Power Supply Models with integrated graphics: External 65-watt Smart AC adapter
Models with discrete graphics: External 90-watt Smart AC adapter
6-foot (1.8-meter) power cord included; total length including external AC adapter is 12 feet (3.66 meter)
HP Fast Charge*

* HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. HP Fast Charge does not apply to the HP 9-cell battery.

Battery Primary battery

HP ProBook 4520s:
HP 9-cell (93 WHr) Li-Ion battery
HP 6-cell (47 WHr) Li-Ion battery

HP ProBook 4720s:
HP 8-cell (73 WHr) Li-Ion battery

Battery Life	Configurations with integrated graphics	Configurations with discrete graphics
HP ProBook 4520s		
9-cell battery	Up to 10 hours	Up to 8 hours
6-cell battery	Up to 5 hours	Up to 4 hours
HP ProBook 4720s		
8-cell battery	N/A	Up to 6 hours

NOTE: Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See MobileMark07 battery benchmark www.bapco.com/products/mobilemark2007 for additional details.

System Standby Time Up to TBD week

Power Conservation Supports enhanced Intel SpeedStep technology (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)
ATI PowerPlay technology
Hibernation
Standby
ACPI compliance

Standard Features (availability may vary by country)

Service and Support HP Services offers limited 3-year, 1-year and 90-day warranty options depending on country; 1-year limited warranty on primary battery. Warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.

Options (availability may vary by country)

Memory	HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA
	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA
Storage	HP 250 GB USB Pocket Media Hard Drive	FE477AA
	HP External USB CD/DVD R/RW Drive	FS943AA
Communication	HP WLAN 802/11 a/b/g/draft-n Mini-card Kit	KM591AA#xxx
Expansion	HP Basic Adjustable Stand	AL549AA
	HP USB 2.0 Docking Station	FQ834AA
	HP Essential USB 2.0 Port Replicator	AQ731AA
	HP Dual Hinge Notebook Stand	AW661AA
	HP Display & Notebook Stand	AW662AA
	HP Adjustable Display Stand	AW663AA
	HP Adjustable Dual Display Stand	AW664AA
Power	65W Smart AC Adapter	ED494AA
	90W Smart AC/Auto/Air Combo Adapter	AJ652AA
	HP 65W Slim Adapter	AX727AA
	HP Smart 65W Travel AC Adapter	AU155AA
	90W Smart AC Adapter	ED495AA
	HP 6-Cell Li-Ion Primary Battery	KU531AA
Carrying Cases	HP Deluxe Nylon Backpack	RR317AA
	HP Value Nylon Case	RR314AA
	HP Universal Nylon Case	RR315AA
	HP Executive Leather Case	RR316AA
	HP Deluxe Roller Case	GD405AA
	HP Basic Backpack	AM863AA
	HP Basic Messenger	AP355AA
	HP Basic Carrying Case	AJ078AA
	HP Professional Series Carrying Case	AT886AA
	HP Professional Series Backpack	AT887AA
	HP Professional Series Messenger	AT888AA
	HP Professional Series Designer Tote	AT889AA
	HP Professional Series Slip Case	AT890AA
HP Elite Series Quick Case	AT892AA	

Options (availability may vary by country)

Security	HP/Kensington MicroSaver Security Lock	PC766A
	HP Notebook Cable Lock	AY475AA
	HP Privacy Filter For 15.6 in	AU103AA
	HP Privacy Filter For 17.3 in	AU650AA

Input/Output Devices	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369A
	HP USB Keyboard & Mouse Bundle	RC465AA
	HP USB Optical Travel Mouse	RH304AA
	HP Wireless Mouse	AR085AA
	HP BT Headset	AR084AA
	HP Mobile Audio Speakers	FS944AA
	HP Mobile Productivity Bundle	AQ729AA
	HP Notebook Companion Projector	AX325AA
	HP Special Edition Optical Mouse	AU094AA
	HP Premium Autofocus Webcam	KQ245AA
	Premium Digital Headset	KJ270AA
	HP Promo USB Graphics Adapter	NL571AT

Memory

DDR3 PC3-10600 SDRAM (1333 MHz)*

Two SODIMM slots supporting dual-channel memory

SODIMM sizes supported: 1024 MB, 2048 MB and 4096 MB

- Standard Memory
- 1024 MB (1024 MB x 1)
 - 2048 MB (2048 MB x 1)
 - 2048 MB (1024 MB x 2)
 - 3072 MB (2048 MB + 1024 MB)
 - 4096 MB (2048 MB x 2)

Optional Memory Upgrades Support for up to 8192 MB of memory with the installation of optional DDR3 SDRAM memory kits. Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
2048 MB	1024 MB	1024 MB
2048 MB	2048 MB	empty
3072 MB	2048 MB	1024 MB
4096 MB	2048 MB	2048 MB
4096 MB	4096 MB	empty
8192 MB	4096 MB	4096 MB

* Memory speed is processor dependent.

NOTE: This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

Memory Upgrades	HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA
	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA

Storage

Removable Media Drive Support

	Quantity Supported	Drive Bay
Blu-ray ROM DVD+/-RW SuperMulti DL LightScribe Drive*	One	Fixed optical drive bay
DVD+/-RW SuperMulti DL LightScribe Drive	One	Fixed optical drive bay
DVD-ROM Drive	One	Fixed optical drive bay

* Support for the Blu-ray DVD drive on configurations with integrated graphics requires Windows7 or Windows Vista; configurations with discrete graphics support it with any offered Windows operating system.

Internal Storage Device

	Quantity Supported	Drive Bay
Hard Drives		
500 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
320 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
250 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
750 GB 5400 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay

Technical Specifications

System Unit	Dimensions (HxWxD)	HP ProBook 4520s: 1.09 in (at front) x 14.64 in x 9.83 in 27.7 mm (at front) x 371.8 mm x 249.6 mm
		HP ProBook 4720s: 1.11 in (at front) x 16.17 in x 10.49 in 28.2 mm (at front) x 410.6 mm x 266.4 mm
	Weight	HP ProBook 4520s: Starting at 5.26 lb (2.39 kg) without optical drive or 5.5 lb (2.5 kg) with optical drive
		HP ProBook 4720s: Starting at 6.51 lb (2.97 kg) without optical drive or 6.8 lb (3.1 kg) with optical drive
<p>NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 6-cell battery, no optical drive. Weight varies by configuration and components.</p>		
Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	18.5 V
	Average Operating Power	with integrated graphics: 18 W with discrete graphics: 21 W
	Max Operating Power	< 90 W or < 65W
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Select models*
	EPEAT	Registered TBD in United States**
	ICES	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	MIC	Yes

Technical Specifications

BSMI	Yes
CE Marking Compliance	Yes
BNCI or BELUS	Yes
CIT	Yes
GOST	Yes
Saudi Arabian Compliance (ICCP)	Yes
SABS	Yes
UKRSERTCOMPUTER	Yes

* Configurations of the HP ProBook 4520s and HP Probook 4720s that are ENERGY STAR qualified are identified as HP ProBook 4520s ENERGY STAR and HP Probook 4720s ENERGY STAR on HP websites and on www.energystar.gov.

** EPEAT registration varies by country. See www.epeat.net for registration status by country. EPEAT status listed above applies to U.S.

NOTE: For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

HP 90W Smart AC Adapter	Dimensions	5.00 x 1.97 x 1.1 in (12.7 x 5.0 x 2.9 cm)		
	Weight	0.82 lb (370 g)		
	Input	Input	100 to 240 VAC	
		Input Efficiency	87% min at 115 VAC	
		Input frequency range	47 to 63 Hz	
		Input AC current	1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version	
			2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version	
		Output	Output power	90W
		DC output	19.0V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown	
	Connector	3 pin/grounded, mates with interchangeable cords		
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)	
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)	
		Altitude	0 to 10,000 ft (0 to 3,048 m)	
Humidity		20% to 80%		
Storage Humidity		10% to 90%		
EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF- over 200,000 hours at 25°C ambient condition.			

Technical Specifications

HP 65W Smart AC Adapter	Dimensions	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)		
	Weight	0.62 lb (280 g)		
	Input	100 to 240 VAC		
		Input Efficiency	87% min at 115 VAC	
	Output	Input frequency range	47 to 63 Hz	
		Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC	
		Output power	65W	
		DC output	18.5V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown	
		Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)	
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)	
		Altitude	0 to 10,000 ft (0 to 3,048 m)	
		Humidity	20% to 80%	
Storage Humidity		10% to 90%		
EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.			

Displays

17.3-inch LED HD+ anti-Active Area (W x H) glare	Diagonal Size	15.0 x 8.5 in (38.2 x 21.5 cm)		
	Surface Treatment	Anti-glare		
	Contrast Ratio	400:1 typical		
	Refresh Rate	60 Hz		
	Brightness	200 nit typical		
	Pixel Resolution	Pitch	0.23868 x 0.23868 mm	
		Format	1600 x 900	
		Configuration	RGB Stipe	
	Backlight	LED		
	PPI	107		
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum)		
		30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)		

Technical Specifications

17.3-inch LED HD+ BrightView	Active Area (W x H)	15.0 x 8.5 in (38.2 x 21.5 cm)		
	Diagonal Size	17.3 in (43.9 cm)		
	Surface Treatment	BrightView		
	Contrast Ratio	500:1 typical		
	Refresh Rate	60 Hz		
	Brightness	200nit typical		
	Pixel Resolution	Pitch	0.23868 x 0.23868	
		Format	1600 x 900	
		Configuration	RGB Stipe	
	Backlight	LED		
PPI	107			
Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)			

15.6-inch LED HD (1366 x 768) anti-glare	Dimensions (W x H)	13.54 x 7.59 in (34.4 x 19.4 cm)		
	Diagonal Size	15.6 in (39.6cm)		
	Surface Treatment	Anti-glare		
	Contrast Ratio	400:1 (min)		
	Refresh Rate	60 Hz		
	Brightness	210 nit (typical)		
	Pixel Resolution	Pitch	0.252 mm	
		Format	1366 x 768	
		Configuration	RGB Stripe	
	Backlight	LED		
PPI	101 ppi			
Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)			

Technical Specifications

15.6-inch LED HD (1366 x 768) BrightView	Dimensions (W x H)	13.54 x 7.59 in (34.4 x 19.4 cm)
	Diagonal Size	15.6 in (39.6cm)
	Surface Treatment	BrightView (glossy)
	Contrast Ratio	500:1 (typical)
	Refresh Rate	60 Hz
	Brightness	200 nit (typical)
	Pixel Resolution	Pitch 0.252 mm
		Format 1366 x 768
		Configuration RGB Stripe
	Backlight	LED
	PPI	101 ppi
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)

Internal Storage

750 GB 5400 rpm SATA Hard Drive	Drive Weight	0.27 lb (125 g)
	Capacity	750 GB
	Height	0.50 in (12.7 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 150 MB/s (Drive Capability)
	Seek Time	Single Track 2 ms
	(typical reads, including settling)	Average 12ms
		Maximum 22 ms
	Rotational Speed	5400 rpm
	Logical Blocks	1,465,149,168
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

Technical Specifications

500 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)
	Capacity	500 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 150 MB/s (Drive Capability)
	Seek Time	Single Track 1.5ms
	(typical reads, including settling)	Average 11ms
		Maximum 22ms
	Rotational Speed	7200 rpm
	Logical Blocks	976,773,168
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

320 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)
	Capacity	250 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 150 MB/s (Drive Capability)
	Seek Time	Single Track 1.5ms
	(typical reads, including settling)	Average 11ms
		Maximum 22ms
	Rotational Speed	7200 rpm
	Logical Blocks	625,142,448
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

Technical Specifications

250 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)
	Capacity	250 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 150 MB/s (Drive Capability)
	Seek Time	Single Track 1.5ms
	(typical reads, including settling)	Average 11ms
		Maximum 22ms
	Rotational Speed	7200 rpm
	Logical Blocks	488,397,168
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

Optical Drives

DVD-ROM Drive	Access Times	Random	< 140 ms CD (typical) < 160 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM 8X-DVD	Up to 3,600 KB/s Up to 10,800 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	None	
	Max Media Capacity (read)	8.5GB	
	Transport	Tray Loading	

Technical Specifications

DVD+/-RW SuperMulti DL LightScribe Drive	Access Times	Random	< 150ms CD (typical) < 160 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM 8X DVD 24X CD-R 16X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 4X - DVD+R Dual Layer 4X - DVD-R Dual Layer 5X DVD-RAM	Up to 3,600 KB/s Up to 10,800 KB/s Up to 3,600 KB/s Up to 2,400 KB/s Up to 10,800 KB/s Up to 10,800 KB/s Up to 10,800 KB/s Up to 8100KB/s Up to 5,400 KB/s Up to 5,400 KB/s Up to 6,750 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, LightScribe	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

Blu-ray ROM DVD+/-RW SuperMulti DL LightScribe Drive	Access Times	Random	<190 ms CD-ROM (typical) < 190ms DVD-ROM (typical) <230 ms BD-ROM (typical)
	Max Data Transfer Rate	24X CD-ROM 8X DVD-ROM 16X CD-R 10X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 4X - DVD+R Dual Layer 4X - DVD-R Dual Layer 5X DVD-RAM 4X BD-ROM	Up to 3600KB/s Up to 10800 KB/s Up to 1,200KB/s Up to 1500 KB/s Up to 10800 KB/s Up to 10,800KB/s Up to 10800 KB/s Up to 8,100 KB/s Up to 5400 KB/s Up to 6750 KB/s Up to 18,000KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	



Technical Specifications

Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM, BD-ROM, BD-R, BD-RE
Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+R(9), DVD+RW, DVD-R, DVD-R(9), DVD-RW, DVD-RAM, LightScribe
Max Media Capacity (read)	50.0 GB
Max Media Capacity (write)	8.5GB
Transport	Tray Loading

Security

HP Fingerprint Sensor (optional)	Mobile Voltage Operati3.0V-3.6V Single Supply
	Operating Temperature32° - 158°F (0° - 70°C)
	Current Consumption @3.3V Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	High-Rate Image CaptureUp to 240 image frames /sec
	ESD Resistance IEC 61000-4-2 Level 4 (±15KV)
	Detection Matrix 192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

Audio

Hardware	Implementation IDT 92HD75B High Definition CODEC
	Touch-Sensitive Volume Controls Volume up, volume down, and mute
	Full Duplex Yes
	Microphone In Stereo
	Headphone/Line Out Stereo
	Integrated Microphone Yes

Technical Specifications

Audio Output Quality	Frequency Response	20 Hz - 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz - 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Integrated Stereo Speakers	Power Rating	1.5 Watts
	Impedance	4 Ohms

Communications

Integrated Realtek RTL8151DH-GR 10/100/1000 NIC	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
	Power Management	ACPI compliant - multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
	Performance Features	TCP/IP/UDP Checksum Offload (configurable) Large send offload and Giant send offload Receiving Side Scaling
	Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status
	Interface	PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ
	NIC Device Driver Name	Realtek PCIe Gb Ethernet Family Controller

Technical Specifications

V.92 56K Data/Fax Modem	Form Factor	MDC 1.5 Daughtercard
	Power Management Support	APM Revision 1.2, ACPI
	Approvals/Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	Data Mode Capabilities	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) Optional symbol rates: 2800, 3429 Asymmetric Symbol rates Synchronous primary channel data signaling rates: 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J
	Fax Mode Capabilities	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
	Command Set	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251

Technical Specifications

HP un2420 EV-DO/HSPA Mobile Broadband Module	Technology/Operating Bands	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 900MHz (UTRA FDD Band VIII), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
	Wireless Protocol Standards	GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 – CS4 and MSC1 – MSC9. UMTS/WCDMA: Release 99 and Release 6 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000
	Wireless Parametric Standards	Meets or exceeds TIA/EIA IS-98-D
	Maximum Data Rates	UMTS (HSPA) – 7.2 Mbps (Download), 2.0 Mbps (Upload) CDMA (EVDO Release A) – 3.1 Mbps (Download), 1.8 Mbps (Upload)
	GPS	Standalone GPS enabled
	GPS Bands	L1 – 1575.42 MHz
	Maximum Output Power	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+/-1) CDMA: 24dBm (+/-1)
	Maximum Power Consumption	2500mA (peak); 1000mA (average)
	Power Consumption, Sleep Mode	5 mA
	Power Management	USB selective suspend Integrated notebook wireless button
	Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express MiniCard, USB 2.0 interface
	Weight	11.5 g
	Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
	Voltage, Operating	3.3v +/- 10%
	Temperature, Operating (from TIA/EIA/IS-98-D)	22° to 140° F (–30° to 60° C) (full RF performance) –22° to 167° F (–30° to 75° C) (reduced RF performance)
	Temperature, Non- operating, 96 hours (from MIL-STD 202 Method 108)	–40° to 185° F (–40° to 85° C)
	Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
	Configuration Utilities	HP Connection Manager
	LED Activity	LED Off – Radio Off; Solid LED On – Radio On

Atheros 9285G 802.11b/a/n 1x1 WiFi	Wireless LAN Standards	IEEE 802.11b IEEE 802.11a
---------------------------------------	------------------------	------------------------------



Technical Specifications

Adapter	IEEE 802.11n	
Interoperability	Wi-Fi certified	
Frequency Band	2.4 GHz	
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: many possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification	
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM	
Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.	
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture	Ad-hoc (Peer to Peer)	
Models	Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CCK) ²	17 dBm, nominal	
Output Power (for OFDM) ²	5 dBm, nominal power varies by data rate) ²	
Power Consumption	Transmit: 1.5 W (max) Receive: 1.0 W (max) Associated to Access Point, Idle: 300 mW nominal Wireless Button Off: 75 mW nominal	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ³	54 Mbps: -75 dBm, 11 Mbps: -88 dBm , 1 Mbps: -93 dBm	
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 149° F (-10° to 65° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	

Technical Specifications

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

Intel Centrino Advanced Wireless LAN Standard 6200	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n*
	* In countries where 802.11n is not allowed, this capability is not enabled.
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
Frequency Band	2.4 GHz and 5GHz
Antenna Structure	2 transmit; 2 receive (2x2)
Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security ¹	Authentication: WPA and WPA2, 802.1x (EAP_TLS, TTLS, PEAP, LEAP, EAP-FAST) Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2 Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture	Ad-hoc (Peer to Peer)
Models	Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between 2.4GHz band Access Points
Output Power (for CCK and OFDM) ²	17 dBm max
Power Consumption	Transmit: 2.3 Watts (max, with two spatial streams) Receive: 1 Watt (max with two spatial streams) Idle mode ³ : 35 mW (average) Radio off: 20 mW (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity ⁴	54 Mbps: -76 dBm, 6 Mbps: -92 dBm

Technical Specifications

Antenna Connections	2 U.FL type connectors, 50 ohm nominal impedance	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.0075 lb (3.4 g)	
Dimensions	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)	
Operating Voltage	3.3V +/- 9%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 90% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode and on battery power. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista. 	

Broadcom 4322AGN 802.11a/b/g/n WiFi Adapter	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n*
	Interoperability	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz and 5 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6, 6.5, 9, 12, 13, 13.5, 18, 19.5, 24, 26, 27, 36, 39, 40.5, 48, 52, 54, 58.5, 65, 78, 81, 104, 108, 117, 121.5, 130, 135, 162, 216, 243, 270, 300 Mbps
	Frequency Support	20 MHz: 2.4 GHz and 5 GHz bands 40 MHz: 2.4 GHz and 5 GHz bands
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.

Technical Specifications

Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture	Ad-hoc (Peer to Peer)	
Models	Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CCK) ²	17 dBm , nominal	
Output Power (for OFDM)	5 dBm , nominal power varies by data rate) ²	
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit/Receive 20 MHz channel: 2.0 W (max) Transmit/Receive 40 MHz channel: 2.0 W (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ³	270 Mbps: -61dBm, , 54 Mbps: -72 dBm, 11 Mbps: -85 dBm , 1 Mbps: -92 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	14° to 149° F (-10° to 65° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista. 	

Broadcom 4312G 802.11b/g WiFi Adapter	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz



Technical Specifications

Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture	Ad-hoc (Peer to Peer)
Models	Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK) ²	17 dBm , nominal
Output Power (for OFDM)	5 dBm , nominal power varies by data rate) ²
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit: 2.0 W (max) Receive: 2.0 W (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity ³	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express Half-MiniCard
Weight	0.013 lb (6 g)
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
Operating Voltage	3.3v +/- 10%
Temperature	Operating 14° to 149° F (-10° to 65° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN

Technical Specifications

supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

HP Integrated Module with Bluetooth 2.1 Wireless Technology	Bluetooth Specification 2.1 Compliant	
	Dimensions	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)
	Frequency Band	2402 to 2480 MHz
	Number of Available Channels	79 (1 MHz) available channels
	Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
	Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate
	Power Consumption	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
	Antenna	Internally integrated within module
	Range	Up 33 ft (10 m)
	Electrical Interface	USB 2.0 compliant Microsoft Windows Plug and Play compliant
	Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software
	Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
	Security	Full support of Bluetooth Security Provisions
	Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
	Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
	Temperature	Operating -4° to 158° F (-20° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
	Humidity	Operating 10% to 90% Non-operating 5% to 95%
	Altitude	Operating 15,000 ft (4,572 m) Non-operating 40,000 ft (12,192 m)
	Bluetooth Profiles Supported	Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2}

Technical Specifications

Object Push Profile (OPP)^{1,2}
 File Transfer Profile (FTP)
 Synchronization Profile (SYNC)
 Hard Copy Cable Replacement (HCRP)^{1,2}
 Personal Area Networking Profile (PAN)^{1,2}
 Human Interface Device Profile (HID)^{1,2,3}
 FAX Profile (FAX)
 Basic Imaging Profile (BIP)²
 Headset Profile (HSP)
 Hands Free Profile (HFP)
 Advanced Audio Distribution Profile (A2DP)

1. indicates the profile is supported by Microsoft Windows XP SP2
 2. indicates the profile is part of Windows Vista

Environmental Data HP ProBook 4520s Notebook PC

Eco-Label Certifications This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT - Silver

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data for the Convertible Mini tower Desktop model is based on a "Typically Configured Notebook"

	115 VAC	230 VAC	100 VAC
Energy Consumption			
Normal Operation	11.22 W	11.86 W	11.22 W
Sleep (Energy Star low power mode)	0.89 W	1.04 W	0.89 W
Off	0.53 W	0.69 W	0.52 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	38 BTU/hr	41 BTU/hr	38 BTU/hr
Sleep	3 BTU/hr	4 BTU/hr	3 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions
(in accordance with
ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	2.9	26.7
Fixed Disk (random writes)	2.8	26.5

Technical Specifications

System fan is usually off except when charging the battery

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:

CR2032 (coin cell), Li-ion

High capacity Lithium-Ion battery

Additional information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Silver level, see: www.epeat.net

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post consumer recycled plastic (by wt.)

This product is greater than 95% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - Corrugated 190 g
 - Corrugated carton 485 g
- Internal:
 - Polyethylene low density 38 g
- The Corrugated/Corrugated Carton packaging material is made from 80% recycled content.
- The Polyethylene low density packaging material is made from 100% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in

Technical Specifications

packaging materials.

- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

HP ProBook 4720s Notebook PC

Eco-Label Certifications This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT - Gold

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data for the Convertible Mini tower Desktop model is based on a "Typically Configured Notebook"

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	11.8 W	11.85 W	11.80 W
Sleep (Energy Star low power mode)	0.98 W	1.08 W	0.98 W
Off	0.61 W	0.68 W	0.59 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	40 BTU/hr	41 BTU/hr	40 BTU/hr
Sleep	3 BTU/hr	4 BTU/hr	3 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions
(in accordance with
ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	2.8	24.2
Fixed Disk (random writes)	2.8	25.8

System fan is usually off except when charging the battery

Batteries This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:

CR2032 (coin cell), Li-ion

6-cell high capacity Lithium-Ion battery (optional 8 cell available)



Technical Specifications

Additional information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see: www.epeat.net

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post consumer recycled plastic (by wt.)

This product is greater than 95% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - Corrugated Carton 300 g
 - Corrugated 210 g
- Internal:
 - Polyethylene low density 43 g
- The Polyethylene low density packaging material is made from 100% recycled content.
- The Corrugated Carton packaging material is made from 80% recycled content.
- The Corrugated packaging material is made from 100% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

HP ProBook 4520s Notebook PC and HP ProBook 4720s Notebook PC

Material Usage

This product does not contain any of the following substances in excess of



Technical Specifications

regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment:

http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

End-of-life Management Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to:

<http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard
Corporate Environmental
Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:



Technical Specifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Copyright © 2010 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>