


## Overview

HP recommends Windows Vista®  
Business

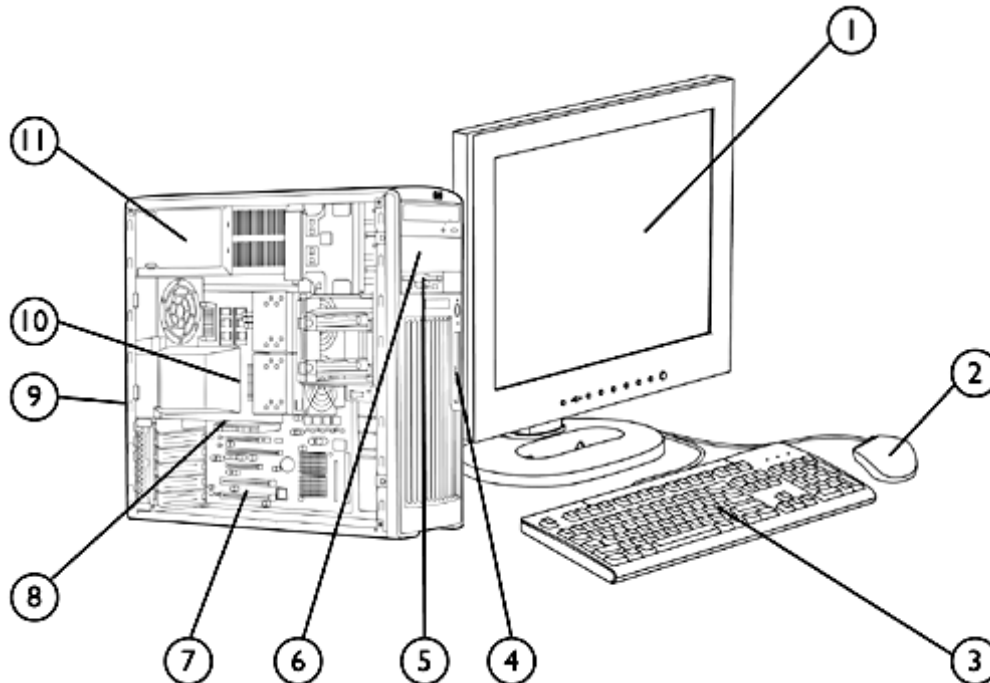

1. Monitor (sold separately)
2. Standard Keyboard (USB or PS/2)
3. Mouse (USB or PS/2)
4. Front IO: 2 USB 2.0, IEEE-1394 (optional), headphone and microphone
5. 3.5" external bay for optional diskette drive or other 3.5" device
6. 2 internal 3.5" bays, 2 external 5.25" bays
7. 2 PCI, 1 PCI Express x16 mechanical/x4 electrical, 2 PCI Express x8 mechanical/x4 electrical
8. 1 PCI Express x16 Graphics Bus
9. 5 USB 2.0 (rear), 1 USB 2.0 (internal), 1 standard serial port, 1 parallel port, 2 PS/2, 1 RJ-45, audio in/out
10. Dual-Core or Quad-Core Intel® Xeon® Processors
11. 575 watt power supply  
Optional 575W 80 PLUS power supply also available.

## Overview

### At A Glance

- Choice of Operating Systems:
  - Genuine Windows Vista Business 32 or 64
  - Genuine Microsoft Windows Vista™ Business 32-bit downgrade to Microsoft Windows XP Professional
  - Genuine Microsoft Windows Vista™ Business 64-bit downgrade to Microsoft Windows XP Professional x64
  - Genuine Windows® XP Professional
  - Genuine Windows XP Professional x64 Edition (see <http://www.hp.com/workstations/pws/windowsxp64/> for details)
  - Red Hat Enterprise Linux WS 3 (32- or 64-Bit version as an after market option)
  - Red Hat Enterprise Linux WS 4 (32- or 64-Bit version)
  - HP Linux Installer Kit (see <http://www.hp.com/workstations/software/linux/> for details)
- 64-Bit Quad-Core Intel® Xeon® Processor 5300 Sequence (8 MB L2 cache) or Dual-Core Intel® Xeon® Processor 5100 Sequence (4 MB L2 cache)
- 1066 and 1333 MHz Front Side Bus support
- 4-channel 667 MHz FB-DIMM Memory Subsystem
- Up to 16 GB Memory capacity
- PCI Express I/O and Graphics
- Integrated Broadcom 5752 Gigabit Ethernet
- 4 channels of Serial ATA (SATA) 3.0Gb/s natively supported internally; RAID level 0, 1 available on motherboard (HW RAID functionality not supported by Linux)
- 80 PLUS Power supply option
- SATA optical drives now supported
- High Definition integrated audio with internal speaker
- Pre-loaded Manageability Tools
- Protected by HP Services, including a 3 years next business day onsite standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

## Standard Features - Custom Components

**Processor and Speed –**  
Up to 2 of the following

### **Quad-Core Intel Xeon Processor with Intel® 64 Architecture**

One or two Quad-Core Intel Xeon Processor 5300 Sequence, 8 MB total L2 cache (2 x 4 MB shared):\*

- Quad -Core Intel® Xeon® Processor 5310/ 1.60 GHz,1066 MHz FSB
- Quad -Core Intel® Xeon® Processor 5320/ 1.86 GHz,1066 MHz FSB
- Quad -Core Intel® Xeon® Processor 5335/ 2.00 GHz,1333 MHz FSB
- Quad -Core Intel® Xeon® Processor 5345/ 2.33 GHz,1333 MHz FSB

\* When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See [http://www.intel.com/products/processor\\_number/](http://www.intel.com/products/processor_number/) for details. Intel® 64 Architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel 64 Architecture. Processor will not operate (including 32-bit operation) without an Intel 64 Architecture -enabled BIOS. Performance will vary depending on your hardware and software configurations. See <http://www.intel.com/technology/64bitextensions> for more information including details on which processors support Intel 64 Architecture or consult with your system vendor for more information.

### **Dual-Core Intel Xeon Processor with Intel® 64 Architecture**

One or two Dual-Core Intel Xeon Processor 5100 Sequence, 4 MB shared L2 cache\*

- Dual-Core Intel® Xeon® Processor 5110/ 1.60 GHz,1066 MHz FSB
- Dual-Core Intel® Xeon® Processor 5120/ 1.86 GHz,1066 MHz FSB
- Dual-Core Intel® Xeon® Processor 5130/ 2.00 GHz,1333 MHz FSB
- Dual-Core Intel® Xeon® Processor 5140/ 2.33 GHz,1333 MHz FSB
- Dual-Core Intel® Xeon® Processor 5150/ 2.66 GHz,1333 MHz FSB
- Dual-Core Intel® Xeon® Processor 5160/ 3.00 GHz,1333 MHz FSB

\* When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See [http://www.intel.com/products/processor\\_number/](http://www.intel.com/products/processor_number/) for details. Intel® 64 Architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel 64 Architecture. Processor will not operate (including 32-bit operation) without an Intel 64 Architecture -enabled BIOS. Performance will vary depending on your hardware and software configurations. See <http://www.intel.com/technology/64bitextensions> for more information including details on which processors support Intel 64 Architecture or consult with your system vendor for more information.

---

**Power supply option**      80 PLUS power supply is optional

---

## Standard Features - Custom Components

<b>Operating System –</b> One of the following	Genuine Windows Vista Business 64*
	Genuine Windows Vista Business 32*
	Genuine Microsoft Windows Vista™ Business 64-bit downgrade to Microsoft Windows XP Professional x64
	Genuine Microsoft Windows Vista™ Business 32-bit downgrade to Microsoft Windows XP Professional
	Genuine Windows XP Professional SP2
	Genuine Windows XP Professional x64 Edition
	HP Linux Installer CD Box Set for Red Hat Linux 7.2, 7.3 and Workstation 3 (64-Bit)
	HP Linux Installer Kit (see <a href="http://www.hp.com/workstations/software/linux">http://www.hp.com/workstations/software/linux</a> ):
	Red Hat Enterprise Linux WS 4 (Update 4 or later) (32- or 64-bit version)
	Red Hat Enterprise Linux WS 3 (Update 8) (32 or 64 bit version)

For detailed OS/hardware support information for Linux, see:  
[http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)

1-3 Hard Disk Drives – Up to 3 of the following SATA drives, or 3 of the following SAS drives. (The third HDD would occupy an external 5.25" bay and require a bracket.)	SATA Hard Drive	Windows Vista	Windows XP	Red Hat Linux
	80 GB 7200 rpm SATA 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	160 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	250 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	500 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	750 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	80 GB 10K rpm SATA 1.5Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	160 GB 10K rpm SATA 1.5Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	<b>SAS Hard Drive</b> (SAS Controller is required)			
	146 GB 10K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	300 GB 10K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	73 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	146 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	300 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

Factory integrated RAID on motherboard for SATA drives		Windows Vista	Windows XP	Red Hat Linux
	RAID 0 Configuration – Striped Array	32-Bit - 750 GB HD drive not supported with Vista	32-Bit, 64-Bit	Not supported
	RAID 1 Configuration – Mirrored Array	32-Bit	32-Bit, 64-Bit	Not supported

**NOTE:** Requires 2 identical hard drives (speeds, capacity, interface).

### Standard Features - Custom Components

Drive controllers		Windows Vista	Windows XP	Red Hat Linux
	Integrated SATA 3.0Gb/s Controller, RAID 0, 1, 10, 5 supported	All RAID levels supported but only RAID 0, 1 is configure-to-order	32-Bit, 64-Bit	WS 3, WS 4 (HW RAID functionality not supported by Linux)
	LSI SAS3041E Serial Attach SCSI (SAS) Host Bus Adapter (HBA)	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported

Memory - One of the following		Windows Vista	Windows XP	Red Hat Linux
	512 MB (1 x 512 MB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit not supported	32-Bit, 64-Bit	WS 3, WS 4
	1 GB (2 x 512 MB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	2 GB (4 x 512 MB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	2 GB (2 x 1 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	3 GB (2 x 1GB + 2 x 512 MB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	4 GB (4 x 1 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	4 GB (2 x 2 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	6 GB (2 x 2 GB + 2 x 1 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	8 GB (4 x 2 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	16 GB (4x 4 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

1 -2 Removable storage (Up to 2 of the following)		Windows Vista	Windows XP	Red Hat Linux
	No Floppy Drive option	N/A	N/A	N/A
	1.44-MB Diskette Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	No Optical Drive option	N/A	N/A	N/A
	16X DVD-ROM Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	SATA 48X CD-RW/DVD-ROM Combo Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	SATA SuperMulti DVD+/-RW LightScribe Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

\*\* LightScribe software works with Windows only. LightScribe creates a grayscale image similar to black and white photography. LightScribe media required and sold separately. Double-layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players

## Standard Features - Custom Components

Keyboard – One of the following*		Windows Vista	Windows XP	Red Hat Linux
No Keyboard option		N/A	N/A	N/A
PS/2 Standard Keyboard		32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
USB Standard Keyboard		32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

\* [Mixing PS/2 and USB Keyboards and Mice are not supported with Linux OS.](#)

Mouse – One of the following*		Windows Vista	Windows XP	Red Hat Linux
No Mouse option		N/A	N/A	N/A
PS/2 2-Button Scroll Mouse (mechanical)		32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
USB 2-Button Scroll Mouse (optical)		32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
USB 3-Button Mouse (optical)		32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

\* [Mixing PS/2 and USB Keyboards and Mice are not supported with Linux OS.](#)

Audio		Windows Vista	Windows XP	Red Hat Linux
Integrated High Definition Audio with Internal Speaker		32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3*, WS 4
HP Optical Drive Internal Audio Cable (Not supported with X-Fi audio card or no optical drive option)		32-Bit, 64-Bit	32-Bit, 64-Bit	Not Supported
SoundBlaster® X-Fi™ XtremeMusic PCI Audio Card		Not supported	32-Bit, 64-Bit	Not Supported

\* [Via Linux drivers on HP support website that are not part of RHEL WS3](#)

NIC		Windows Vista	Windows XP	Red Hat Linux
Integrated Broadcom BCM5752 Gigabit LoM		32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
Broadcom BCM5751 NetXtreme™ Gigabit Ethernet Controller (PCI-E)		32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

### Standard Features - Custom Components

PCI Express Graphics	Windows Vista	Windows XP	Red Hat Linux
No Graphics option	N/A	N/A	N/A
NVIDIA Quadro NVS 285 (128 MB) - 1 or 2 of these cards supported (2nd card not supported on Windows Vista)	32-Bit, 64-Bit (single card only)	32-Bit, 64-Bit	WS 3, WS 4
NVIDIA Quadro NVS 440 (256 MB) - 1 or 2 of cards supported (2nd card not supported on Windows Vista)	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4 (single card supported only but can be 2nd card with NVS 285)
NVIDIA Quadro FX 560 (128 MB) - 1 or 2 of these cards are supported (2nd card not supported on Windows Vista)	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4
ATI FireGL V3350 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
NVIDIA Quadro FX 1500 (256 MB) - 1 or 2 of these cards are supported	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4
NVIDIA Quadro FX 3500 (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
ATI FireGL V7200 (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
NVIDIA Quadro FX 4500 (512 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
NVIDIA Quadro FX 4600 PCIe (768 MB)**	Not supported	32-Bit, 64-Bit	WS 3, WS 4

**NOTE:** \*\* This card consumes 2 PCIe slots, reducing the maximum number of PCI cards in a system

Miscellaneous	Windows Vista	Windows XP	Red Hat Linux
IEEE 1394a FireWire 400 4-Port PCI Card	32-Bit, 64-Bit	32-Bit, 64-Bit	Not Supported
IEEE 1394b FireWire 800 3-Port PCI Card	Not supported	32-Bit, 64-Bit	Not Supported
HP Energy Star 3.0 Enabled Configuration	Not supported	32-Bit	Not Supported
HP Workstation Mouse Pad	N/A	N/A	N/A
Solenoid Hood Lock & Hood Sensor	All	All	All

### Standard Features - Custom Components

Software	Windows Vista	Windows XP	Red Hat Linux
Symantec AntiVirus 10 (optional preinstall)	32-Bit, 64-Bit (expected availability in July 2007)	32-Bit, 64-Bit	Not supported
Intervideo WinDVD (DVD-ROM player only)	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
Roxio Easy Media Creator (CD or DVD burner) PDF Complete	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
Optional Microsoft Office 2007 Trial Edition	32-Bit (English language only)	32-Bit	Not supported
Optional Microsoft Office 2007 Small Business Edition	32-Bit (English language only)	32-Bit	Not supported
HP Performance Tuning Framework	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
HP Backup and Recovery	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
HP Client Manager Software v6.2	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
Optional HP ProtectTools Security Solutions	32-bit, 64-Bit	32-Bit, 64-Bit	Not supported



## Standard Features - Specs

Operating System (choice)	Genuine Windows Vista™ Business 64*
	Genuine Windows Vista™ Business 32*
	Genuine Microsoft Windows Vista™ Business 32-bit downgrade to Microsoft Windows XP Professional
	Genuine Microsoft Windows Vista™ Business 64-bit downgrade to Microsoft Windows XP Professional x64
	Genuine Windows XP Professional SP2
	Genuine Windows XP Professional x64 Edition
	OR Red Hat Enterprise Linux WS 4 64-Bit preload (32-Bit version included on recovery CD or as after market option)
	OR Red Hat Enterprise Linux WS 3 (32-Bit & 64-Bit) available as an after market option.
	OR HP Installer Kit for Linux (includes drivers for both 32-Bit & 64-Bit OS versions of RHEL WS 3 and RHEL WS 4)
	* The following components are not yet supported on Microsoft Windows Vista Business and HP Workstations; ATI graphics, 1394b cards, dual graphics configurations, Creative SoundBlaster X-fi, RAID 5 10 or data array
Form Factor	Minitower
Colour	Carbonite/Alloy metallic
System Board Form Factor	12"x9.8"
Processor	1 or 2 Dual-Core Intel® Xeon® Processor 5100 Sequence or Quad-Core Intel Xeon Processor 5300 Sequence with Intel® 64 Architecture
CPU FSB	1066, 1333 MHz
Standard L2 Cache	4 MB L2 shared cache (non ECC) for Dual-Core / 8 MB (2 X 4 MB shared) total L2 cache (non ECC) for Quad-Core
Chipset	Intel 5000X
Memory Expansion Slots	4 DIMMs
Memory Type Supported	DDR2 Registered ECC FB-DIMMs
Memory Speed Supported	667 MHz
Maximum Memory	16 GB (4 DIMMs slots with 4 GB DIMMS)
Network Controller	Integrated Broadcom 5752 Gigabit Ethernet LoM
Audio	Integrated high definition digital audio with S/PDIF 6-channel pass-through, stereo microphone, and Yamaha XG Lite Softsynth support. If using RHEL WS 3, the audio drivers are not included as part of the standard RHEL WS 3 operating system. Use the ALSA audio drivers included on the HP Driver CD or from the HP support website. See <a href="http://www.hp.com/support/linux_hardware_matrix">http://www.hp.com/support/linux_hardware_matrix</a> and <a href="http://www.hp.com/support/linux_user_manual">http://www.hp.com/support/linux_user_manual</a> for details.
PCI Slots	2 PCI slots (full-length) 2 PCI Express (x8 mechanically, x4 electrically) 1 PCI Express (x16 mechanically/x4 electrically) 1 PCI Express x16 graphics
Bays	Total Bays = 5
Internal Bays	2 internal 3.5" HDD bays with acoustic dampening rail assemblies
External Bays	2 external 5.25" bays - 203 mm maximum device depth (top bay is limited to 198 mm depth when optional smart cover solenoid lock is installed). Bottom bay can be converted to an internal 3.5 inch 3rd Hard Drive bay using optional bracket One 3.5 inch bay for optional floppy drive

## Standard Features - Specs

Front I/O	2 USB 2.0, Headphone, Microphone, optional IEEE 1394 <b>NOTE:</b> Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix ( <a href="http://www.hp.com/support/linux_hardware_matrix">http://www.hp.com/support/linux_hardware_matrix</a> ) for details, and to the Linux User Manual ( <a href="http://www.hp.com/support/linux_user_manual">http://www.hp.com/support/linux_user_manual</a> ) for tips on user-enablement of the IEEE 1394 Card.	
Internal I/O	1 USB 2.0 header	
Rear I/O	5 USB 2.0, 1 standard serial port, 1 parallel port, PS/2 keyboard and mouse, 1 RJ-45 to integrated Gigabit LAN, Audio In, Audio Out, Microphone In	
Choice of PS/2 or USB Keyboard	1	
Choice of PS/2 or USB Mouse	1	
Chassis Dimensions (H x W x D)	17.3 x 6.5 X 17.3 inches; 44.1 x 16.5 x 44.0 cm	
System Weight	Minimum config – 14.60 kg (32.30 lbs) Maximum config – 18.11 kg (39.94 lbs)	
Temperature	Operating	40° to 95° F (5° to 35° C)
	Non-operating	-40° to 140° F (-40° to 60° C)
Humidity	Operating	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (nonpressurized)	Operating	10,000 ft (3,000 m)
	Non-operating	30,000 ft (9,100 m)
Power Supply	575W wide-ranging, active Power Factor Correction	
Interfaces Supported	4-channel SATA interface (4 Serial-ATA connectors each), 2 EIDE interface (2 EIDE connectors) supported for optical drives, USB 2.0, IEEE 1394 (optional)	
Hard Drive Controller Supported	SATA (integrated) or optional SAS (PCIe) controllers	

### Standard Features - Preconfigured Global SKU's

<b>xw6400X/XG1.60/ D80/R1.0/285d/p</b> RD687AW#ABA (Eng) RD687AW#ABC (Fr. Can.)	<b>OS</b>	Genuine Windows XP Professional (32-bit)
	<b>Base unit</b>	HP xw6400 Workstation base unit
	<b>Localization kit</b>	HP xw6400 Workstation localization kits
	<b>Processor 1</b>	Dual-Core Intel Xeon 5110/ 1.60 GHz, 4 MB L2, /1066 MHz FSB
	<b>Processor 2</b>	NA
	<b>Memory</b>	1 GB (2 x 512 MB ) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM
	<b>Hard Drive</b>	HP 80 GB 7200 rpm SATA 3.0Gb/s
	<b>Controller</b>	NA
	<b>Optical Drive</b>	HP 16X DVD-ROM
	<b>Graphics</b>	NVIDIA Quadro NVS 285 PCIe (128 MB)
	<b>Floppy disk drive</b>	NA
	<b>Keyboard</b>	HP USB standard keyboard
	<b>Mouse</b>	HP USB optical scroll mouse

<b>xw6400X/XG2.00+/ D80/R2.0/285d/p</b> RD688AW#ABA (Eng) RD688AW#ABC (Fr. Can.)	<b>OS</b>	Genuine Windows XP Professional (32-bit)
	<b>Base unit</b>	HP xw6400 Workstation base unit
	<b>Localization kit</b>	HP xw6400 Workstation localization kits
	<b>Processor 1</b>	Dual-Core Intel Xeon 5130/ 2 GHz, 4 MB L2, /1333 MHz FSB
	<b>Processor 2</b>	Dual-Core Intel Xeon 5130/ 2 GHz, 4 MB L2, /1333 MHz FSB
	<b>Memory</b>	2 GB (2 x 1 GB ) PC2-5300F DDR2-667 ECC registered Fully Buffered - DIMM
	<b>Hard Drive</b>	HP 80 GB 7200 rpm SATA 3.0Gb/s
	<b>Controller</b>	NA
	<b>Optical Drive</b>	HP 16X DVD-ROM
	<b>Graphics</b>	NVIDIA Quadro NVS 285 PCIe (128 MB)
	<b>Floppy disk drive</b>	NA
	<b>Keyboard</b>	HP USB standard keyboard
	<b>Mouse</b>	HP USB optical scroll mouse

### Standard Features - Preconfigured Global SKU's

<b>xw6400X/XG2.33+/ E80/R2.0/285d/p</b> RD689AW#ABA (Eng.) RD689AW#ABC (Fr. Can.)	<b>OS</b>	Genuine Windows XP Professional (32-bit)
	<b>Base unit</b>	HP xw6400 Workstation base unit
	<b>Localization kit</b>	HP xw6400 Workstation localization kits
	<b>Processor 1</b>	Dual-Core Intel Xeon 5140 2.33 GHz, 4 MB L2, /1333 MHz FSB
	<b>Processor 2</b>	Dual-Core Intel Xeon 5140 2.33 GHz, 4 MB L2, /1333 MHz FSB
	<b>Memory</b>	2 GB (2 x 1 GB ) PC2-5300F DDR2-667 ECC registered Fully Buffered - DIMM
	<b>Hard Drive</b>	HP 80 GB 10K rpm SATA 3.0Gb/s NCQ
	<b>Controller</b>	NA
	<b>Optical Drive</b>	HP 16X DVD-ROM
	<b>Graphics</b>	NVIDIA Quadro NVS 285 PCIe (128 MB)
	<b>Floppy disk drive</b>	NA
	<b>Keyboard</b>	HP USB standard keyboard
	<b>Mouse</b>	HP USB optical scroll mouse

<b>xw6400X/XG2.66+/ B73a/R4.0/285d/p</b> RD690AW#ABA (Eng.) RD690AW#ABC (Fr. Can)	<b>OS</b>	Genuine Windows XP Professional (32-bit)
	<b>Base unit</b>	HP xw6400 Workstation base unit
	<b>Localization kit</b>	HP xw6400 Workstation localization kits
	<b>Processor 1</b>	Dual-Core Intel Xeon 5140 2.66 GHz, 4 MB L2, /1333 MHz FSB
	<b>Processor 2</b>	Dual-Core Intel Xeon 5140 2.66 GHz, 4 MB L2, /1333 MHz FSB
	<b>Memory</b>	HP 4 GB (2x 2 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered - DIMM
	<b>Hard Drive</b>	HP 73 GB 15K rpm SAS 3.0Gb/s
	<b>Controller</b>	LSI 3041E 4-port SAS/SATA RAID card
	<b>Optical Drive</b>	HP 16X DVD-ROM
	<b>Graphics</b>	NVIDIA Quadro NVS 285 PCIe (128 MB)
	<b>Floppy disk drive</b>	NA
	<b>Keyboard</b>	HP USB standard keyboard
	<b>Mouse</b>	HP USB optical scroll mouse

### Standard Features - Preconfigured Global SKU's

<b>xw6400X/XG2.66+/ B73a/R4.0/285d/p</b> RV741AW#ABA (Eng) RV741AW#ABC (Fr. Can.)	<b>OS</b>	Genuine Windows XP Professional (32-bit)
	<b>Base unit</b>	HP xw6400 Workstation base unit
	<b>Localization kit</b>	HP xw6400 Workstation localization kits
	<b>Processor 1</b>	Dual-Core Intel Xeon 5160 3.00 GHz, 4 MB L2, /1333 MHz FSB
	<b>Processor 2</b>	Dual-Core Intel Xeon 5160 3.00 GHz, 4 MB L2, /1333 MHz FSB
	<b>Memory</b>	HP 4 GB (2x 2 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered - DIMM
	<b>Hard Drive</b>	HP 250 GB 17200 rpm SATA 3.0Gb/s
	<b>Optical Drive</b>	HP 16X DVD-ROM
	<b>Graphics</b>	NVIDIA Quadro NVS 285 PCIe (128 MB)
	<b>Floppy disk drive</b>	NA
	<b>Keyboard</b>	HP USB standard keyboard
	<b>Mouse</b>	HP USB optical scroll mouse

<b>xw6400X/XQ1.86+/ F160/R4.0/285+d/p</b> GH741AW#ABA (Eng.) GH741AW#ABC (Fr. Can.)	<b>OS</b>	Microsoft Windows XP Pro 32-bit OS
	<b>Base unit</b>	HP xw6400 Workstation Base Unit
	<b>Localization kit</b>	HP xw6400 Localization Kit
	<b>Processor</b>	Intel Xeon 5320 1.86 8MB/1066 QC 1st CPU Intel Xeon 5320 1.86 8MB/1066 QC 2nd CPU
	<b>Memory</b>	HP 4GB (4x1GB) DDR2-667 ECC FBD RAM
	<b>Hard Drive</b>	HP 160GB SATA 3Gb/s NCQ 7200 1st HDD
	<b>Optical Drive</b>	HP 16X/48X DVD-ROM 1st Drive
	<b>Graphics</b>	NVIDIA Quadro NVS 285 128MB PCIe NVIDIA Quadro NVS 285 128M PCIe (2nd)
	<b>Floppy disk drive</b>	No Floppy Disk Option
	<b>Keyboard</b>	HP USB Standard Keyboard
	<b>Mouse</b>	HP USB Optical Scroll Mouse

<b>xw6400X/XR2.33+/ F250/R4.0/Xd/s</b> GH742AW#ABA (Eng.) GH742AW#ABC (Fr. Can.)	<b>OS</b>	Microsoft Windows XP Pro 32-bit OS
	<b>Base unit</b>	HP xw6400 Workstation Base Unit
	<b>Localization kit</b>	HP xw6400 Localization Kit
	<b>Processor</b>	Intel Xeon 5345 2.33 8MB/1333 QC 1st CPU Intel Xeon 5345 2.33 8MB/1333 QC 2nd CPU
	<b>Memory</b>	HP 4GB (2x2GB) DDR2-667 ECC FBD RAM
	<b>Hard Drive</b>	HP 250GB SATA 3Gb/s NCQ 7200,1st HDD
	<b>Optical Drive</b>	HP 16X/48X DVD-ROM 1st Drive
	<b>Graphics</b>	HP No Graphics Option
	<b>Floppy disk drive</b>	No Floppy Disk Option
	<b>Keyboard</b>	HP PS/2 Standard Keyboard
	<b>Mouse</b>	HP PS/2 Scroll Mouse

### Standard Features - Preconfigured Regional Models

<b>xw6400X/XG2.0/ D80/R1.0/Xv/p</b> RB391UA#ABA (Eng.) RB391UA#BC (Fr. Can.)	<b>OS</b>	MS Windows XP Pro 32-bit US
	<b>Base unit</b>	HP xw6400 Workstation Base Unit
	<b>Localization kit</b>	xw6400 Localization Kit US
	<b>Processor</b>	Xeon 5130 2.00 4MB/1333 DC (1st)
	<b>Memory</b>	1GB (2x512) DDR2-667 ECC FBD
	<b>Hard Drive</b>	80GB SATA 3Gb/s 7200 (1st)
	<b>Optical Drive</b>	HP 48X CD-RW/DVD Combo SATA 1st Drive
	<b>Graphics</b>	No Graphics Option
	<b>Floppy disk drive</b>	No Floppy Disk Option
	<b>Keyboard</b>	HP PS/2 Standard Keyboard US
	<b>Mouse</b>	HP USB Optical Scroll Mouse

<b>xw6400X/XG2.33/ F160/R1.0/Xv/p</b> RB392UA#ABA (Eng.) RB392UA#ABC (Fr. Can.)	<b>OS</b>	MS Windows XP Pro 32-bit US
	<b>Base unit</b>	HP xw6400 Workstation Base Unit
	<b>Localization kit</b>	xw6400 Localization Kit US
	<b>Processor</b>	Intel Xeon 5140 2.33 4MB/1333
	<b>Memory</b>	1GB (2x512) DDR2-667 ECC FBD
	<b>Hard Drive</b>	160GB SATA 3Gb/s NCQ 7200
	<b>Optical Drive</b>	HP 48X CD-RW/DVD Combo SATA 1st Drive
	<b>Graphics</b>	No Graphics Option
	<b>Floppy disk drive</b>	No Floppy Disk Option
	<b>Keyboard</b>	HP PS/2 Standard Keyboard US
	<b>Mouse</b>	HP USB Optical Scroll Mouse

<b>xw6400X/XG2.66/ A146a/R1.0/Xv/p</b> RB393UA#ABA (Eng.) RB393UA#ABC (Fr. Can.)	<b>OS</b>	MS Windows XP Pro 32-bit US
	<b>Base unit</b>	HP xw6400 Workstation Base Unit
	<b>Localization kit</b>	xw6400 Localization Kit US
	<b>Processor</b>	Intel Xeon 5150 2.66 4MB/1333
	<b>Memory</b>	1GB (2x512) DDR2-667 ECC FBD
	<b>Hard Drive</b>	146GB SAS 3Gb/s 10K
	<b>Controller</b>	LSI 3041E 4-port SAS/SATA RAID Card
	<b>Optical Drive</b>	HP 48X CD-RW/DVD Combo SATA 1st Drive
	<b>Graphics</b>	No Graphics Option
	<b>Floppy disk drive</b>	No Floppy Disk Option
	<b>Keyboard</b>	HP PS/2 Standard Keyboard US
<b>Mouse</b>	HP USB Optical Scroll Mouse	

## After-Market Options

Processors		Part Number
	<b>2nd Quad-Core Intel® Xeon® processor 5300 Series with Intel64 Architecture, and 8 MB of L2 cache (2x4 MB shared)</b>	
	Quad-Core Intel Xeon Processor 5310/ 1.60 GHz, 1066 MHz FSB	RQ538AA
	Quad -Core Intel Xeon Processor 5320/ 1.86 GHz, 1066 MHz FSB	RM054AA
	Quad -Core Intel Xeon Processor 5335/ 2.00 GHz, 1333 MHz FSB	RQ539AA
	Quad -Core Intel Xeon Processor 5345/ 2.33 GHz, 1333 MHz FSB	RQ540AA
	<b>2nd Dual-Core Intel Xeon processor 5100 Series with Intel® 64 Architecture, and 4 MB of Shared L2 cache</b>	
	Dual-Core Intel Xeon Processor 5110/ 1.60 GHz, 1066 MHz FSB	EY012AA
	Dual-Core Intel Xeon Processor 5120/ 1.86 GHz, 1066 MHz FSB	EY013AA
	Dual-Core Intel Xeon Processor 5130/ 2.00 GHz, 1333 MHz FSB	EY014AA
	Dual-Core Intel Xeon Processor 5140/ 2.33 GHz, 1333 MHz FSB	EY015AA
	Dual-Core Intel Xeon Processor 5150/ 2.66 GHz, 1333 MHz FSB	EY016AA
	Dual-Core Intel Xeon Processor 5160/ 3.00 GHz, 1333 MHz FSB	EY017AA
	<p><b>NOTE:</b> Upgrade from Intel Xeon processor 5000 series not supported. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See <a href="http://www.intel.com/products/processor_number/">http://www.intel.com/products/processor_number/</a> for details.</p> <p>Intel 64 Architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel 64 Architecture. Processor will not operate (including 32-bit operation) without an Intel 64 Architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See <a href="http://www.intel.com/technology/64bitextensions">http://www.intel.com/technology/64bitextensions</a> for more information including details on which processors support Intel 64 Architecture or consult with your system vendor for more information.</p> <p>Quad-Core and Dual-Core are new technologies designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.</p>	

Graphics (PCI Express)	Multi display solutions	Windows Vista	Windows XP	Red Hat Linux	Part Number
	NVIDIA Quadro NVS 285 (128 MB) - 1 or 2 of these cards supported (2nd card not supported on Windows Vista)	32-Bit, 64-Bit (single card only)	32-Bit, 64-Bit	WS 3, WS 4	RD069AA
	NVIDIA Quadro NVS 440 (256 MB) - 1 or 2 of cards supported (2nd card not supported on Windows Vista, or Linux (except with NVS 285))	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4	PT453A
	NVIDIA Quadro FX 560 (128 MB) - 1 or 2 of these cards are supported (2nd card not supported on Windows Vista)	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4	ES354AA

### After-Market Options

ATI FireGL V3350 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	RV705AA
NVIDIA Quadro FX 1500 (256 MB) - 1 or 2 of these cards are supported	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4	ES355AA
NVIDIA Quadro FX 3500 (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ES357AA
ATI FireGL V7200 (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ES356AA
NVIDIA Quadro FX 4500 (512 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA762AA
NVIDIA Quadro FX 4600 PCIe (768 MB)**	Not supported	32-Bit, 64-Bit	WS 3, WS 4	RV706AA

\* Two NVIDIA Quadro NVS 285 PCIe cards may be used together on any OS except Windows Vista™ which does not support two NVS 285 cards. An NVS 285 and an NVS 440 can be supported together under Microsoft Windows XP. Two NVIDIA Quadro FX 1500 PCIe cards may be used together on Windows XP 32-bit and x64. One NVIDIA Quadro NVS 440 PCIe and NVIDIA Quadro NVS 285 PCIe may be used together on Windows XP 32-bit.

Hard Drives	SATA Hard Drives	Windows Vista	Windows XP	Red Hat Linux	Part Number
	80 GB 7200 rpm SATA 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PY276AA
	160 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PV944A
	250 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA788AA
	500 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PV943A
	750 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	RH201AA
	80 GB 10K rpm SATA NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM172AA
	160 GB 10K rpm SATA NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EW222AA
	<b>SAS Hard Drives</b>				
	146 GB 10K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM173AA
	300 GB 10K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	RH937AA
	73 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA329AA
	146 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA330AA
	300 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM174AA



## After-Market Options

Controllers	PCIe	PCI-X	Windows Vista	Windows XP	Red Hat Linux	Part Number
LSI SAS3041E 4-Port, Host Bus Adapter (NCQ (Native Command Queuing) is not supported on this card at this time.)	X		32-Bit, 64-Bit	32-Bit, 64-Bit		EH417AA
LSI MegaRAID SAS 8344ELP 8-port, PCI Express SAS RAID Adapter	X		32-Bit, 64-Bit (RAID 5, 10 not supported)	32-Bit, 64-Bit		EX830AA

1394 PCI Cards	PCI	PCI-X	Windows Vista	Windows XP	Red Hat Linux	Part Number
IEEE 1394a FireWire 400 4-Port PCI Card	X		32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported	PA997A
IEEE 1394b FireWire 800 3-Port PCI Card	X		Not supported	32-Bit, 64-Bit	Not supported	EA327AA

Input/Output Devices*	Keyboards	Windows Vista	Windows XP	Red Hat Linux	Part Number
	HP PS/2 Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DT527A
	HP USB Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DT528A
	HP USB Smartcard Keyboard	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported	ED707AA
	<b>Pointing Devices</b>				
	HP PS/2 2-Button Scroll Mouse (mechanical) (Carbonite)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DD440B
	HP USB 2-Button Scroll Mouse (optical) (Carbonite/Silver)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DC172B
	HP USB 3-Button Mouse (optical)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DY651A
	USB SpacePilot	TBD	32-Bit, 64-Bit	Not supported	EF390AA
	HP USB SpaceExplorer USB 3D Input Device	32-Bit, 64-Bit	32-Bit, 64-Bit	Not Supported	RY429AA

\* Mixing PS/2 and USB Keyboards and Mice are not supported with Linux OS.

## After-Market Options

Networking	NICs	PCIe	PCI-X	Windows Vista	Windows XP	Red Hat Linux	Part Number
	Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCIe)	X		32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA833AA

Memory modules	667 MHz	Windows Vista	Windows XP	Red Hat Linux	Part Number
	512 MB (1 x 512 MB) PC2-5300F DDR2-667 ECC registered Fully Buffered - DIMM	32-bit, 64-bit supported (must be more than 1 stick)	32-Bit, 64-Bit	WS 3, WS 4	EM159AA
	1 GB (1 x 1 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM160AA
	2 GB (1 x 2 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM161AA
	4 GB (1 x 4 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM162AA

Monitors (Supported by all Operating Systems available from HP)	TFT displays	Part Number
	HP LP3065 30-inch Widescreen LCD Monitor	EZ320A4
	HP LP2465 24-inch Widescreen LCD Monitor	EF224A4
	HP L2065 20-inch LCD Monitor	EF227A4
	HP L1965 19-inch LCD Monitor	RA373AA

Optical drives	DVD-ROM Drive	Windows Vista	Windows XP	Red Hat Linux	Part Number
	HP 16X DVD-ROM Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	AA620B
	<b>CD-ROM Drive</b>				
	SATA 48X CD-RW/DVD-ROM Combo Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EW267AA
	<b>DVD+/-RW Drive</b>				
	SATA SuperMulti DVD+/-RW LightScribe*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EW269AA

\*LightScribe software works with Windows only. LightScribe creates a grayscale image similar to black and white photography. LightScribe media required and sold separately. Double-layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players

## After-Market Options

Removable Storage	Windows Vista	Windows XP	Red Hat Linux	Part Number
HP 512 MB USB 2.0 Drive Key	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ED516AA
HP 1 GB USB 2.0 Drive Key	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	AG382AA
1.44 MB Internal Floppy Drive	TBD	32-Bit	WS 3, WS 4	DY670A
HP 16-In-1 Media Card Reader with PCI Card 3Q	TBD			EM718AA
HP StorageWorks DAT 40 USB external tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW023A
HP StorageWorks DAT 40 USB internal tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW022A
HP StorageWorks DAT 72 USB external tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW027A
HP StorageWorks DAT 72 USB internal tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW026A
HP StorageWorks DAT 160 USB external tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	Q1581A
HP StorageWorks DAT 160 USB internal tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	Q1580A

Audio	Windows Vista	Windows XP	Red Hat Linux	Part Number
HP Satellite Stereo Speakers	32-Bit, 64-Bit	32-Bit, 64-Bit	32-Bit, 64-Bit	ZD929AA
HP USB Powered Speakers	32-Bit, 64-Bit	32-Bit, 64-Bit	32-Bit, 64-Bit	RD628AA
SoundBlaster X-Fi XtremeMusic Audio Card	Not supported	32-Bit, 64-Bit	Not supported	EA326AA

Brackets/Rack Kits	Part Number
xw64 Depth Adjustable Sliding Rail Rack Kit	DY663A
HP Optical Bay HDD Mounting Bracket	DY659A

Other Devices	Part Number
HP Internal USB Port Kit	EM165AA
HP Power Cord Kit	DM293A

Security features	Part Number
HP Business PC Security Lock Kit	PV606AA
Kensington Security Cable & Lock	PC766A
HP Solenoid Hood Lock/Sensor Kit	DE618A

## After-Market Options


Software	Windows Vista	Windows XP	Red Hat Linux	Part Number
HP Remote SW for HP 1year Update Subscription	Future support	32-Bit	Not supported	PN680A
HP Remote SW Receiver 1year Update Subscription	Future support	32-Bit	Not supported	PN682A
HP Remote Graphics SW V3 for HP Systems LTU	Future support	32-Bit	Not supported	PY682AA
HP Remote Graphics SW V3 Receiver LTU	Future support	32-Bit	Not supported	PY684AA
HP Remote Graphics SW V3 CD-ROM Media	Future support	32-Bit	Not supported	PY685AA
HP ProtectTools Quantity 1 Software	32-Bit, 64-Bit	32-Bit	Not supported	EM530AA
HP ProtectTools Quantity 25 Software	32-Bit, 64-Bit	32-Bit	Not supported	EM531AA
HP ProtectTools Quantity 500 Software	32-Bit, 64-Bit	32-Bit	Not supported	EM532AA

## Memory


### Intel 5000X Chipset

PC2-5300F DDR2-667 ECC Registered Fully Buffered DIMM


The Intel 5000X chipset supports ECC Registered DDR2 667 MHz FB-DIMMs only. The motherboard has 4 DIMM slots. Use only fully buffered, PC2-5300F DIMMs. Match multiple DIMMs by size and type. Use HP memory only.

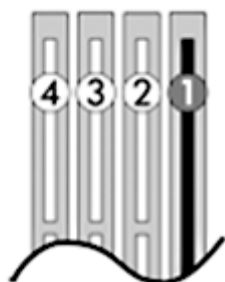

single DIMM configuration

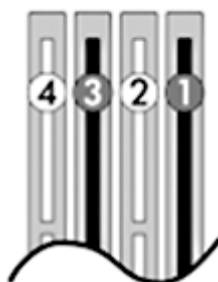

two DIMM configuration

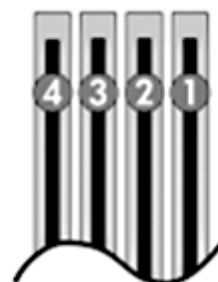

four DIMM configuration

If only using 1 DIMM, install in socket 1. If using 2 DIMMs, install them in sockets 1 & 3. If using 4 DIMMs, install them in all sockets.

### MAXIMUM MEMORY

Supports up to 16 GB of DDR2 FB-DIMM SDRAM.


### POSSIBLE MEMORY CONFIGURATIONS

Not all memory configurations possible are represented below.

DIMM Size	Slot			
	1	2	3	4
512 MB	512 MB			
1 GB	512 MB		512 MB	
2 GB	1 GB		1 GB	
2 GB	512 MB	512 MB	512 MB	512 MB
4 GB	1 GB	1 GB	1 GB	1 GB
8 GB	2 GB	2 GB	2 GB	2 GB
16 GB	4 GB	4 GB	4 GB	4 GB

## Storage

Tower configuration

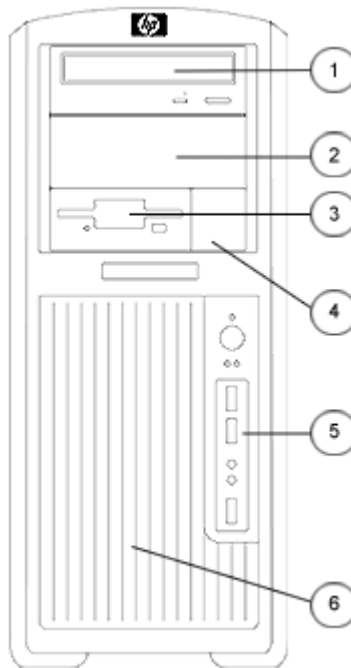

### Minitower

Optional Diskette Drive  
 5.25" storage drive bays  
 (position 1 drive bay is limited to 198 mm depth when optional smart cover solenoid lock is installed; position 2 drive bay can be converted to an internal 3.5" 3rd hard drive bay with optional bracket)  
 3.5" storage drive bays with acoustic dampening rail assemblies

**Quantity Supported**

**Position Supported**

**Controller**

Optional Diskette Drive	1	3	IDE
5.25" storage drive bays (position 1 drive bay is limited to 198 mm depth when optional smart cover solenoid lock is installed; position 2 drive bay can be converted to an internal 3.5" 3rd hard drive bay with optional bracket)	2	1, 2	IDE (or SATA with new SATA optical drives)
3.5" storage drive bays with acoustic dampening rail assemblies	2 (3)	5 (and 2, for 3rd drive using optical bay)	SATA or optional SAS Factory Integrated RAID*

SATA and SAS may be mixed only in a Windows configuration and with the inclusion of an optional SAS controller. Here are the rules for mixing hard drives:

1. The boot/data drive must be SATA to load before any SAS drive.
2. Any size or speeds may be chosen for drives  
In non-mixed Microsoft

## Storage

Windows and Linux systems, rules 2 & 3 apply.

Configure-to-order RAID configs must all have the same size/speed hard drives.

Up to 4 channels of SATA can be supported natively.

**NOTE\***: Factory Integrated RAID 0 Configuration (Striped Array) and RAID 1 Configuration (Mirrored Array) requires 2 hard drives with identical speeds, capacity and interface. Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit <http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf> for RAID capabilities with Linux.

## Technical Specifications

<b>System Board</b>	
Processor Architecture	Quad-Core Intel® Xeon® Processor 5300 sequence or Dual-Core Intel® Xeon® Processor 5100 sequence
Chipset	Intel® 5000X
Super I/O Controller	SMSC SCH5307
System Board Form Factor	9.8"x12.0"
Processor Socket	Dual LGA 771
DIMM Connectors (FBD DDR2)	4
PCI Connectors (5.0V)	2 full length 33 MHz 32-Bit
PCI Express Connectors	1 PCI Express x16 graphics 2 PCI Express (x8 mechanically, x4 electrically) 1 PCI Express (x16 mechanical/x4 electrically)
Flash ROM	Yes
HD Integrated Audio	Yes
CD-ROM inches; audio	No
AUX inches; audio	Yes
Clear CMOS Button	Yes
CPU Fan Headers	Yes
Chassis Fan Headers	Yes
Chassis Speaker Header	Yes
Front Control Panel/Speaker Header	Yes
CMOS Battery Holder - Lithium	Yes
Hood Lock Header	No
Hood Sensor Header	No
Multibay Header	No
Integrated Gigabit Ethernet	Broadcom BCM5752
Wake on LAN	Yes
Integrated Trusted Platform Module	TPM 1.2 expected availability is for systems sold beginning in 2007
ASF 2.0 (Alert Standard Format)	Yes
Integrated SATA RAID	<ul style="list-style-type: none"> <li>● RAID 0, RAID 1*, RAID 5 and RAID 10</li> <li>● Supports one RAID array with 2-4 drives</li> <li>● RAID 0 configuration - striped array (supported and configure to order under Microsoft Windows Vista)</li> <li>● RAID 1 configuration - mirrored array</li> <li>● RAID 5 parity striping (supported but not configure to order under Microsoft Windows Vista)</li> <li>● RAID 10 stripe of mirrors (supported but not configure to order under Microsoft Windows Vista)</li> </ul> <p><b>NOTE:</b> HW RAID functionality not supported by Linux. Use SW RAID functionality provided in the Red Hat Operating system instead.</p>



## Technical Specifications

SATA Connectors	4 ports/connectors
IEEE 1394a or 1394b	No integrated 1394a or 1394b – optional PCI card required. Cable from Front IO can be plugged into PCI Card. Not supported in Linux
USB 2.0 Connectors	8 (5 rear, 2 on header for front, 1 internal)
Power Supply Headers	Yes
Power Switch, Power LED & Hard Drive LED Header	Yes
Password Clear Header	Yes

Cooling Solutions	
Power Supply Fan	92x25 mm variable speed
Processor Heatsink Fan(s)	80x15 mm
Rear Chassis Fan(s)	Two 92x32 mm

Power Supply		
Power Supply	575 Watt wide-ranging, active Power Factor Correction	
Operating Voltage Range	90 – 269 VAC	
Rated Voltage Range	100 – 240 VAC	118 VAC
Rated Line Frequency	50/60Hz	400Hz
Operating Line Frequency Range	47–66Hz	393–407Hz
Rated Input Current	10 A @ 100-120VAC 6 A @ 200-240 VAC	9.7 @ 118 VAC
Heat Dissipation (configuration and software dependent)	Typical 980 btu/hr (247 kg-cal/hr) Maximum 3413 btu/hr (860 kg-cal/hr)	
Power Supply Fan	92x25 mm variable speed	
Blue Angel Compliant (<5w in S5 – power off)	N/A	
FEMP Standby Power compliant @ 115V (<2W in S5 – power off)	YES	
Power Consumption in ES mMode – Suspend to RAM (S3) (instantly available PC)	< 7 W	

## Technical Specifications

<b>80 PLUS Power Supply</b>		
Power Supply	575 Watt wide-ranging, active Power Factor Correction	
Operating Voltage Range	90 – 269 VAC	
Rated Voltage Range	100 – 240 VAC	118 VAC
Rated Line Frequency	50/60Hz	400Hz
Operating Line Frequency Range	47–66Hz	393–407Hz
Rated Input Current	7A @ 100-120VAC 3 A @ 200-240 VAC	6.7 @ 118 VAC
Heat Dissipation (configuration and software dependent)	Typical 699 btu/hr (176 kg-cal/hr) Maximum 2804 btu/hr (706 kg-cal/hr)	
Power Supply Fan	92x25 mm variable speed	
Blue Angel Compliant (<5w in S5 – power off)	N/A	
FEMP Standby Power compliant @ 115V (<2W in S5 – power off)	YES	
Power Consumption in ES mMode – Suspend to RAM (S3) (instantly available PC)	< 7 W	

ROM Features	Description
ROM Based F10 Setup and Diagnostics	Review and customize BIOS settings
Remote System Installation via F12 (PXE) (remote boot from server)	Allows a new or existing system to boot over the network and download software, including the operating system
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS
ROM Revision Levels	<ul style="list-style-type: none"> <li>Identifies system ROM revision levels and reports in ROM-based F10 setup</li> <li>Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information</li> </ul>
System Board Revision Level	<ul style="list-style-type: none"> <li>Allows management SW to read the revision level of the system board</li> <li>Revision level is digitally encoded into the hardware and cannot be modified</li> </ul>
Auto Setup when new hardware installed	System automatically detects addition of new hardware
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Enable or disables serial, parallel, USB, audio, and network ports
Removable Media Write/Boot Control	Prevents ability to boot from removable media on supported devices (and can disable writes to media)
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup

## Technical Specifications

<b>Memory Change Alert</b> (requires HP Client Manager Software)	Alerts management console if memory is removed or changed
<b>Thermal Alert</b> (requires HP Client Manager Software)	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> <li>● <b>NORMAL</b> – normal temperature ranges</li> <li>● <b>ALERTED</b> – excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown</li> <li>● <b>SHUTDOWN</b> – excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs</li> </ul>
<b>Master Boot Record Security</b>	Detects changes to MBR and optional restoration, useful in protecting from viruses
<b>Remote ROM Flash</b>	Provides secure, fail-safe ROM image management from a central network console
<b>Remote Wakeup/Shutdown</b>	<ul style="list-style-type: none"> <li>● System administrators can power on, restart, and power off a client computer from a remote location.</li> <li>● Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM</li> </ul>
<b>ACPI</b> (Advanced Configuration and Power Interface)	<ul style="list-style-type: none"> <li>● Allows the system to wake from a low power mode</li> <li>● Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system</li> </ul> Supports ACPI 2.0 for full compatibility with 64-Bit operating systems
<b>Keyboard-less Operation</b>	The system can be operated without a keyboard
<b>SMBIOS</b>	System Management BIOS 2.3.5, previously known as DMI BIOS, for system management information
<b>Localized ROM Setup</b>	Common BIOS image supports configuration (Setup) in 11 languages, with local keyboard mappings
<b>Asset Tag</b>	Allows user or MIS to set unique tag string in ROM
<b>Ownership Tag</b>	Allows user or MIS to set unique tag string in ROM
<b>Memory Scrubbing</b>	Allows memory controller to transparently correct transient ECC errors in the background
<b>Memory Remapping</b>	Allows system memory lost to PCI devices to be reclaimed above 4 GB, for use with operating systems that support more than 4 GB (Windows XP 64-Bit edition, Linux)
<b>Per-slot Control</b>	Allows individual slot configuration (option ROM., latency)
<b>Adaptive Cooling</b>	Fan control parameters are set according to detected hardware configuration for optimal acoustics
<b>Pre-boot Diagnostics</b>	Early (pre-video) critical errors are reported via beeps and blinks on the power LED

## Technical Specifications

Industry Standard	Revision Supported by the BIOS
ACPI	Advanced Configuration and Power Management Interface, Version 2.0
ASF	Alert Standard Format Specification, Version 2.0
ATA (IDE)	ATA Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
ATAPI	ATAPI Removable Media Device BIOS Specification Version 1.0
BBS	BIOS Boot Specification v1.01
BIOS 32-Bit Services	Standard BIOS 32-Bit Service Directory Proposal
CD Boot	"El Torrito" Bootable CD-ROM Format Specification Version 1.0
EDD	<ul style="list-style-type: none"> <li>Enhanced Disk Drive Specification Version 1.1</li> <li>BIOS Enhanced Disk Drive Specification Version 3.0</li> </ul>
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
PCI	<ul style="list-style-type: none"> <li>PCI Local Bus Specification, Revision 2.3</li> <li>PCI Power Management Specification, Revision 1.1</li> <li>PCI Firmware Specification, Revision 3.0, Draft .7</li> </ul>
PCI Express	PCI Express Base Specification, Revision 1.0a
PMM	POST Memory Manager Specification, Version 1.01
SATA	<ul style="list-style-type: none"> <li>Serial ATA Specification, Revision 1.0a</li> <li>Serial ATA 3 Gb/s: Extensions to Serial ATA 1.5 Gb/s, Revision 1.0</li> </ul>
SAS	SAS specification 1.1
SMBIOS	System Management BIOS Reference Specification, Version 2.4
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
UHCI	Universal Host Controller Interface Design Guide, Revision 1.1
USB 1.1	Universal Serial Bus Revision 1.1 Specification
USB 2.0	Universal Serial Bus Revision 2.0 Specification

## Other Deployment & Management Features

### HP Client Management Solutions

HP Client Management Solutions help simplify management of Workstations and significantly reduce total ownership costs. These solutions share a common design and are highly integrated.

HP Client Manager Software is included free with all HP business PCs and Workstations. It enables central tracking, monitoring, and management of the hardware aspects of HP client systems:

- Get valuable hardware information such as CPU, memory, video, and security settings
- Monitor system health to fix problems before they occur
- Install drivers and BIOS updates without visiting each PC
- Remotely configure BIOS and security settings
- Automate processes to quickly resolve hardware problems

Additional solutions (fee-based) are available to address Workstation management challenges through the entire IT lifecycle including:

- Inventory assessment
- Software license compliance
- Personality migration
- Software image deployment
- Software distribution
- Asset management
- Client backup and recovery
- Problem resolution

## Technical Specifications

	Visit <a href="http://www.hp.com/go/clientmanager">http://www.hp.com/go/clientmanager</a> for more information, to download HP Client Manager Software.
<b>HP ProtectTools</b>	<p>HP ProtectTools Security Manager can be configured to prevent unauthorized access using Smart Cards, TPM Embedded security chips, USB tokens and other security technologies. HP ProtectTools Security Manager is completely customizable, which gives customers the flexibility to choose the level of security that best meets their needs.</p> <ul style="list-style-type: none"> <li>● Smart Card security for HP ProtectTools <ul style="list-style-type: none"> <li>○ Initialization and configuration of the Smart Card</li> <li>○ Manage Smart Card accounts and security settings</li> </ul> </li> <li>● Embedded Security for HP ProtectTools <ul style="list-style-type: none"> <li>○ TPM Embedded Security Chip configuration and management</li> </ul> </li> <li>● Credential Manager for HP ProtectTools <ul style="list-style-type: none"> <li>○ Multifactor Windows Authentication</li> <li>○ Single sign-on</li> </ul> </li> <li>● BIOS configuration for HP ProtectTools <ul style="list-style-type: none"> <li>○ BIOS configuration and security settings from within the HP ProtectTools Security Manager console</li> </ul> </li> </ul> <p>Visit <a href="http://h18004.www1.hp.com/products/security/">http://h18004.www1.hp.com/products/security/</a> for more information on HP ProtectTools.</p>
<b>System Software Manager</b> (free - Windows XP only)	A free utility that detects and updates BIOS, device drivers, and management agent versions on your networked PCs and workstations
<b>Replicated Setup</b>	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
<b>Software Restore CD</b>	Restores computer to its original factory shipping image; No recovery CDs will ship with Linux - an ISO image will be available on an HD partition.
<b>Asset Tag</b>	<ul style="list-style-type: none"> <li>● Repository for storing company-specific property asset numbers for easy tracking</li> <li>● Initially set equal to the system serial number</li> <li>● Stored in a protected section of non-volatile memory that can be accessed and modified with the F10 Setup program</li> </ul>
<b>DIMM Serial Presence Detect</b>	Detects whether or not memory DIMMs are present and their type
<b>Hard Drive Serial Number, Model, and Manufacturer</b>	Hard drive manufacturer, model, and serial number is stored in the hard drive firmware and reported in ROM-based F10 setup
<b>Memory Change Alert</b> (Requires HP Client Manager Software - Windows XP only)	Alerts management console if memory is removed or changed
<b>Ownership Tag</b>	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
<b>Protocol-level Integrity Monitoring</b> (CRC checking)	<p>A feature of SATA and SAS, Cyclic Redundancy Checking provides command, data and message transfer verification and proactive notification of problems with recommendations for enhancing system performance. It detects all the following errors types:</p> <ul style="list-style-type: none"> <li>● single bit errors</li> <li>● double bit errors</li> <li>● an odd number of errors</li> <li>● error bursts up to 32-Bits long</li> </ul>
<b>Drive Self Tests (DPS)</b>	<ul style="list-style-type: none"> <li>● Drive Protection System</li> <li>● A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user.</li> </ul>

## Technical Specifications

	<ul style="list-style-type: none"> <li>Running independently of the operating system, it can be accessed through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced.</li> </ul> <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures. DPS Access through F10 Setup during Boot (F10 diagnostic access not available with SCSI drives)</p>
<b>SMART Technology</b> (Self-monitoring, analysis and reporting technology – Windows XP only)	<p>Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted. Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count.</p> <p>By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure.</p> <p>SMART I – Drive Failure Prediction SMART II – Off-Line Data Collection SMART III – Off-Line Read Scanning with Defect Reallocation</p>

Serviceability Features of System	
Access panel	Tool-less, one-handed
Optical drives	Tool-less
Floppy drive	Tool-less
Hard drives	Tool-less
Expansion cards	Tool-less
Chassis fan removal	Tool-less
Green user touch points	Yes, on tool-free internal chassis mechanisms
Color-coordinated cables and connectors	Yes
Memory	Tool-less
CPUs	Requires T15 Torx driver, can be upgraded without removing any internal components except processor heat sink.
Power supply diagnostic LED	Yes, dual function: AC OK & power OK
Power Button	Yes, ACPI multi-function
Power LED	Yes, dual color LED indicates normal operation and faults.
Hard drive activity LED	Yes
Internal speaker	Yes, used for pre-boot diagnostic beep codes
Dual Color Power and HD LED on Front of Computer (Indicates Normal Operations and Fault Conditions)	green – normal red – fault
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS.
Configuration Record SW	Yes
Over-Temp Warning on Screen (Requires IM Agents)	Yes
OS CD (Restore OS CD)	Restores computer to its original factory shipping image; No recovery CDs will ship with Linux - an ISO image will be available on an HD partition.

## Technical Specifications

Restore CD	Restores the computer to its original factory shipping image
Flash ROM	Yes
3.3V Aux Power LED on System PCA	No
Dual Function 5V Aux Power LED (ON)/PS_ON LED (OFF) on System PCA	No
Diagnostic Power Switch LED on board	No
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder for easy Replacement	Yes
Processor ZIF Socket for easy Upgrade	Yes
DIMM Connectors for easy Upgrade	Yes
NIC LEDs (integrated) (Green & Amber)	Used to determine NIC status
ASF 1.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Dual function front power switch	Also acts as a reset switch when held for 4 seconds

Security Features	
112 Trusted Platform Module Chip with optional ProtectTools Software	Enables layered security management
Access Panel Key Lock (standard)	Prevents removal of the access panel and all internal components including optical and floppy drives
Padlock (optional)	Prevents entire system theft and discourages access panel removal. 7mm diameter padlock loop at rear of system.
Kensington Cable Lock (optional)	May prevent entire system theft; Kensington locks to tether systems to the desk. 3mm x 7mm slot at rear of system.
HP Solenoid Hood Lock/Sensor Kit (optional)	The Solenoid Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed.
Universal chassis clamp lock (optional)	The version without a cable discourages access panel removal and prevents theft of IO devices. The version with a cable additionally prevents entire system theft and allows multiple systems to be secured with a single cable.

## Technical Specifications

Service and Support	On-site Warranty and Service (Note 1): This three-year, limited warranty and service offering delivers three years of on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 24 x 7. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.
	<b>NOTE 1:</b> Terms and conditions may vary by country. Certain restrictions and exclusions apply.
	<b>NOTE 2:</b> On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
	<b>NOTE 3:</b> Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Eco-Label Certifications & Declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:
	<ul style="list-style-type: none"> <li>● US Energy 3.0 Star (Not in Linux)</li> <li>● US Federal Energy Management Program (FEMP)</li> <li>● China Energy Conservation Program</li> <li>● IT ECO declaration</li> <li>● Japan PC Green label*</li> </ul>
	<b>*NOTE:</b> This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'

Energy Consumption		
Example Configuration #1	Processor Info	2x2.66GHz Intel Xeon 5100 sequence dual-core processors
	Memory Info	2x1GB 667MHz
	Graphics Info	FX1500
	Disks/Optical/Floppy	2x80GB SATA / 2 Optical / 1 Floppy

Energy Consumption		115 VAC		230 VAC		100 VAC	
	LAN	Enabled	Disabled	Enabled	Disabled	Enabled	Disabled
	Windows Idle (S0)	143W		141W		144W	
	Windows Busy Typ (S0)	244W		238W		245W	
	Windows Busy Max (S0)	308W		306W		314W	
	Sleep (S3)	5.1W	4.3W	5.4W	4.7W	5.1W	4.5W
	Off (S5)	2.6W	1.6W	2.6W	1.9W	2.3W	1.6W



## Technical Specifications

Heat Dissipation**	115 VAC		230 VAC		100 VAC	
	Enabled	Disabled	Enabled	Disabled	Enabled	Disabled
LAN						
Windows Idle (S0)	488W		481W		491W	
Windows Busy Typ (S0)	832W		812W		836W	
Windows Busy Max (S0)	1051W		1046W		1070W	
Sleep (S3)	17.4 btu/hr	14.7 btu/hr	18.4 btu/hr	16.1 btu/hr	17.4 btu/hr	15.4 btu/hr
Off (S5)	8.9 btu/hr	5.5 btu/hr	8.9 btu/hr	6.5 btu/hr	7.8 btu/hr	5.5 btu/hr
<b>NOTES:</b> * Energy Star low energy mode ** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour. This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.						

Declared Noise Emissions (High and entry level configurations)			
System Configuration (Entry-level)	The entry-level configuration used for the Declared Noise Emissions for the Mini tower Desktop model is based on a "Typically Configured Desktop"		
	Processor Info	2x 2.00 GHz Woodcrest Intel Xeon 5130 Sequence	
	Disks/Optical/Floppy	1x 80 GB SATA / 1 DVD-ROM/ 1 Floppy	
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWad, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	4.1 Bels	24 dB
	SATA Hard drive Operating (random reads - 30.3 reads/sec)	4.1 Bels	25 dB
	Floppy Drive Operating (continuous copy)	4.8 Bels	34 dB
	DVD-ROM Operating (sequential reads)	5.0 Bels	34 dB
System Configuration (High-end)	The high-end configuration used for the Declared Noise Emissions for the Mini tower Desktop model is based on a "Typically Configured Desktop"		
	Processor Info	2x 3.00 GHz Woodcrest Intel Xeon 5160 Sequence	
	Graphics Info	Quadro FX 3500 with active heatsink	
	Disks/Optical/Floppy	1x 73 GB 15K rpm SAS / 1 DVD-ROM / 1 Floppy	
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWad, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	4.1 Bels	25 dB
	SATA Hard drive Operating (random reads - 80 reads/sec)	5.2 Bels	33 dB
	Floppy Drive Operating (continuous copy)	4.9 Bels	33 dB
	DVD-ROM Operating (sequential reads)	5.0 Bels	35 dB

## Technical Specifications

<b>Longevity and Upgrading</b>	<p>This product is designed to be upgraded, possibly extending its useful life by several years. Spare parts are available throughout the warranty period and for up to 5 years after the end of production. Upgradeability features contained in the product include:</p> <ul style="list-style-type: none"> <li>● Intel LGA771 processor socket</li> <li>● 8 USB ports</li> <li>● 2 PCI slots and 4 PCI Express slots</li> <li>● 5 storage bays</li> <li>● 4 memory slots</li> </ul>
--------------------------------	--

<b>Batteries</b>	<p>This product complies with ISO standards:</p> <ul style="list-style-type: none"> <li>● EU Directive 91/ 157/ EEC</li> <li>● EU Directive 93/ 86/ EEC</li> <li>● EU Directive 98/ 101/ EEC</li> </ul> <p>Batteries used in the product do not contain:</p> <ul style="list-style-type: none"> <li>● Mercury greater the 5ppm by weight</li> <li>● Cadmium greater than 10ppm by weight</li> <li>● Lead greater than 4000ppm by weight.</li> </ul> <p>Battery size: CR2032 (coin cell) Battery type: Lithium</p>
------------------	---

<b>Additional Information</b>	<ul style="list-style-type: none"> <li>● This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.</li> <li>● This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.</li> <li>● Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.</li> <li>● This product contains 0% recycled materials (by wt.)</li> <li>● This product is &gt;90% recycle-able when properly disposed of at end of life.</li> </ul>	
<b>Packaging Materials</b>		
External	Cardboard carton and insert	2.70 kg
Internal	LDPE Foam	0.35 kg

## Technical Specifications

<b>Material Usage</b>	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html">http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html</a>):</p> <ul style="list-style-type: none"><li>● Asbestos</li><li>● Certain Azo Colorants</li><li>● Certain Brominated Flame Retardants – may not be used as flame retardants in plastics</li><li>● Cadmium</li><li>● Chlorinated Hydrocarbons</li><li>● Chlorinated Paraffins</li><li>● Formaldehyde</li><li>● Halogenated Diphenyl Methanes</li><li>● Lead carbonates and sulfates</li><li>● Lead and Lead compounds</li><li>● Mercuric Oxide Batteries</li><li>● Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.</li><li>● Ozone Depleting Substances</li><li>● Polybrominated Biphenyls (PBBs)</li><li>● Polybrominated Diphenyl Ethers (PBDEs)</li><li>● Polybrominated Biphenyl Oxides (PBBOs)</li><li>● Polychlorinated Biphenyl (PCB)</li><li>● Polychlorinated Terphenyls (PCT)</li><li>● Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.</li><li>● Radioactive Substances</li><li>● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)</li></ul>
<b>Packaging</b>	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"><li>● Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.</li><li>● Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li><li>● Design packaging materials for ease of disassembly.</li><li>● Maximize the use of post-consumer recycled content materials in packaging materials.</li><li>● Use readily recyclable packaging materials such as paper and corrugated materials.</li><li>● Reduce size and weight of packages to improve transportation fuel efficiency.</li><li>● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li></ul>
<b>End-Of-Life Management and Recycling</b>	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/recycle">http://www.hp.com/recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p>

## Technical Specifications

<b>Hewlett-Packard Corporate Environmental Information</b>	For more information about HP's commitment to the environment: [link to new HP white paper now in progress] Global Citizenship Report <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a> Eco-label certifications <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html">http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html</a> ISO 14001 certificates: <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html">http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</a>
--	---

## Technical Specifications - Audio

High Definition Integrated Type		Integrated
Realtek ALC262 Audio	High Definition Codec	Yes
	SPDIF	No
	External audio jacks	One front stereo analog microphone-in One front stereo headphone-out One rear line-in One rear line-out One rear stereo analog microphone-in
	Internal audio connectors	AUX-IN line-level analog input
	Retasking	<b>NOTE:</b> All external audio ports are retaskable as Line-In, Line-Out, Microphone-In, or Headphone-Out
	Sampling	44.1kHz/48 kHz/96kHz/192kHz (output only)
	Wavetable syntheses (software)	Yes - Uses OS soft wavetable
	Digital audio	Yes
	Analog audio	Yes
	Number of channels on Line-Out (mono/stereo)	Two independent stereo outputs (Left & Right channels)
	Internal audio speaker power rating	1.5 W
	Internal speaker	Yes
	Microphone features	Stereo Microphone supporting: Acoustic echo cancellation Noise suppression Beam forming

---

Sound Blaster X-Fi XtremeMusic Audio Card (Windows XP Only)	Audio Quality	Total Harmonic Distortion + Noise at 1kHz (20kHz Low-pass filter) = 0.004%
	Signal to Noise Ratio (SNR)	Signal-to-Noise Ratio (20kHz Low-pass filter, A-Weighted) <ul style="list-style-type: none"> <li>● Stereo Output: 109dB</li> <li>● Front and Rear Channels: 109dB</li> <li>● Centre, Subwoofer and Side Channels: 109dB</li> </ul>
	Sound Conversion	24-bit Analog-to-Digital conversion of analog inputs at 96kHz sample rate 24-bit Digital-to-Analog conversion of digital sources at 96kHz to analog 7.1 speaker output 24-bit Digital-to-Analog conversion of stereo digital sources at 192kHz to stereo output
	Recording/Sampling Rate	44.1, 48 and 96kHz
	ASIO 2.0 support	16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz 24-bit/48kHz and 24-bit/96kHz with direct monitoring
	Enhanced SoundFont support	up to 24-bit resolution 24-bit/96kHz

## Technical Specifications - Audio

DACs	24-bit/192kHz										
Voice Support	128 voices										
Max. Channels in 3D Positional Audio	7.1										
EAX® ADVANCED HD™ 5.0 support	Yes including EAX® MacroFX™, EAX® PurePath™ and Environment FlexiFX™										
Connectors	FlexiJack (Performing a 3-in-1 function, Digital In / Line In / Microphone) via 3.50 mm minijack Line level out (Front / Rear / Centre / Subwoofer / Rear Centre) via 3.50 mm minijacks AUX_IN line-level analog input via 4-pin Molex connector on card One AD_Link (26 pin) connector for linking to the X-Fi I/O Console (upgrade option)										
Dimensions	7.25 x 5 x 0.9 inches; 18.42 x 12.7 x 2.29 cm										
Additional product features	<table> <tr> <td><b>Movies</b></td> <td>THX Certification Dolby Digital EX 6.1 Playback DTS-ES 6.1 Playback</td> </tr> <tr> <td><b>Music</b></td> <td>X-Fi 24-bit Crystalizer CMSS-3D SuperRip</td> </tr> <tr> <td><b>Audio Creation</b></td> <td>Pristine audio playback quality with a near transparent SRC engine Up to eight 24 bit hardware effects ASIO recording with latency as low as one millisecond 24-bit SoundFont® sampling 3D MIDI</td> </tr> <tr> <td><b>Gaming</b></td> <td>EAX ADVANCED HD 5.0</td> </tr> <tr> <td><b>Software Bundle</b></td> <td>Doom 3 Sound Blaster EAX patch Entertainment Mode Audio Creation Mode Game Mode Mode Switcher Audio Console Creative MediaSource Creative MediaSource DVD-Audio Player DTS Neo:6 Settings Karaoke Player Entertainment Centre Smart Recorder SoundFont Bank Manager Speaker Connection Wizard THX Setup Console Vienna SoundFont Studio Volume Panel WaveStudio Console Launcher Creative Media Toolbox Creative Diagnostics</td> </tr> </table>	<b>Movies</b>	THX Certification Dolby Digital EX 6.1 Playback DTS-ES 6.1 Playback	<b>Music</b>	X-Fi 24-bit Crystalizer CMSS-3D SuperRip	<b>Audio Creation</b>	Pristine audio playback quality with a near transparent SRC engine Up to eight 24 bit hardware effects ASIO recording with latency as low as one millisecond 24-bit SoundFont® sampling 3D MIDI	<b>Gaming</b>	EAX ADVANCED HD 5.0	<b>Software Bundle</b>	Doom 3 Sound Blaster EAX patch Entertainment Mode Audio Creation Mode Game Mode Mode Switcher Audio Console Creative MediaSource Creative MediaSource DVD-Audio Player DTS Neo:6 Settings Karaoke Player Entertainment Centre Smart Recorder SoundFont Bank Manager Speaker Connection Wizard THX Setup Console Vienna SoundFont Studio Volume Panel WaveStudio Console Launcher Creative Media Toolbox Creative Diagnostics
<b>Movies</b>	THX Certification Dolby Digital EX 6.1 Playback DTS-ES 6.1 Playback										
<b>Music</b>	X-Fi 24-bit Crystalizer CMSS-3D SuperRip										
<b>Audio Creation</b>	Pristine audio playback quality with a near transparent SRC engine Up to eight 24 bit hardware effects ASIO recording with latency as low as one millisecond 24-bit SoundFont® sampling 3D MIDI										
<b>Gaming</b>	EAX ADVANCED HD 5.0										
<b>Software Bundle</b>	Doom 3 Sound Blaster EAX patch Entertainment Mode Audio Creation Mode Game Mode Mode Switcher Audio Console Creative MediaSource Creative MediaSource DVD-Audio Player DTS Neo:6 Settings Karaoke Player Entertainment Centre Smart Recorder SoundFont Bank Manager Speaker Connection Wizard THX Setup Console Vienna SoundFont Studio Volume Panel WaveStudio Console Launcher Creative Media Toolbox Creative Diagnostics										

## Technical Specifications - Audio

Minimum System Requirements	System RAM	256 MB
	Hard Disk	600MB free space Available PCI 2.1 slot for the audio card CD-ROM/CD-RW or CD/DVD-ROM required for software installation
	Operating System	Microsoft Windows XP Service Pack 2 (SP2)

## Technical Specifications - Communications

<b>Broadcom BCM5752 NetXtreme Gigabit Ethernet LOM (PCIe)</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Broadcom 5752 PCI-E LAN Controller
	<b>Memory</b>	Integrated 64KB receive buffer and 8KB transmit buffer
	<b>Data rates supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	<b>Bus architecture</b>	PCIe 1.0a
	<b>Data path width</b>	X1
	<b>Data path speed</b>	2.5Gbit per sec per direction transfer rate
	<b>Data transfer mode</b>	Bus-master DMA
	<b>Hardware certifications</b>	
	<b>Power requirement</b>	1.5 watts @ +3.3V AUX supply
	<b>Boot ROM support</b>	Yes
	<b>Network transfer rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps
	<b>Operating system driver support</b>	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 3
	<b>Management capabilities</b>	WOL, PXE
	<b>Alerting</b>	ASF 2.0

---

<b>Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCIe)</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Broadcom 5751 PCI-E 1.0a LAN Controller
	<b>Memory</b>	Integrated 96Kb frame buffer memory
	<b>Data rates supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	<b>Bus architecture</b>	PCI-E 1.0a
	<b>Data path width</b>	X1
	<b>Data path speed</b>	2.5Gbit per sec per direction transfer rate
	<b>Data transfer mode</b>	Bus-master DMA
	<b>Hardware certifications</b>	FCC class B, NRTL Mark Canada and United States, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia
	<b>Power requirement</b>	3.1 watts @ +3.3V AUX supply
	<b>Boot ROM support</b>	Yes
	<b>Network transfer rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps



## Technical Specifications - Communications

<b>Environmental</b>	<b>Operating temperature</b>	32° to 131° F (0° to 55° C)
	<b>Operating humidity</b>	85% at 131° F (55° C)
<b>Dimensions</b>		4.4 x 2.2 x 0.08 inches; 11.2 x 5.5 x 0.2 cm
<b>Operating system driver support</b>		Microsoft Windows Vista Business 32 and 64, Microsoft Windows 2000 and XP, Red Hat Linux 7.2, 7.3 and Red Hat Enterprise Linux 3
<b>Management capabilities</b>		WOL, PXE , Remote cable management
<b>Alerting</b>		ASF 2.0
<b>Kit contents</b>		Broadcom 5751, CD, Broadcom 5751 Netxtreme Gigabit PCIe NIC, drivers, quick install guide, product warranty statement

## Technical Specifications - Controllers

LSI SAS3041E Serial Attach SCSI (SAS) Host Bus Adapter (HBA)	PCI Bus	PCI-Express x4 lanes	
	PCI Modes	Bus Master DMA	
	PCI data burst transfer rate	1.0 GBps ( half duplex ) 2.0 GBps ( full duplex )	
	SAS Bandwidths	<b>Half Duplex</b>	<b>Full Duplex</b>
		Single lane – 300 MBps	Single SAS Lane – 600 MBps
		Wide Port (2 lanes) – 600 MBps	Wide Port (2 lanes) – 1200 MBps
		Wide Port (4 lanes) – 1200 MBps	Wide Port (4 lanes) – 2400 MBps
	PCI Card Type	3.3 volt add-in card	
	PCI Voltage	12 V ± 10%	
	PCI Form Factor	6.6" x 2.731" (Low-profile)	
	PCI Power	7.5 Watts	
	Bracket	Full height and Low-profile	
	Certification Level	PCI-Express 1.0a	
	IO Bus	Four 3Gbps SAS / 1.5Gps SATA ports	
	SAS Processor	LSISAS1064E	
	Internal Connectors	Four- SATA x1 connectors	
	External Connectors	None	
	Max. Number of SCSI Devices	128	
	LED Indicators	On-board activity and fault LEDs	
	Integrated Mirroring	Integrated Mirroring option available	
	Environments	Operating	Storage
	Temperature	32° to 140° F (0° to 60° C)	-49° to +221° F (-45° to +105° C)
	Relative Humidity	5% to 90% non-condensing	5% to 90% non-condensing
	MTBF	>200,000 hours	
	Compliances	EMC: Class B-US (CFR 47, P15B); Canada (ICES-003); Japan (V-3/02.04); Europe (EN55022/EN55024); Australia/New Zealand (AS/NZS 3548); Safety: EN60950	
	Operating system support	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, XP Professional x64, Red Hat Enterprise Linux 4 & 5 Desktop	
	Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.	

## Technical Specifications - Controllers

LSI SAS 8344ELP 3Gb/s RAID Controller	PCI Bus	PCI-Express x4 lanes	
	PCI Modes	Bus Master DMA	
	RAID Levels	0, 1, 5, 10 and 50	
	PCI data burst transfer rate	1.0 GBps ( half duplex ) 2.0 GBps ( full duplex )	
	SAS Bandwidths	<b>Half Duplex</b>	<b>Full Duplex</b>
		Single lane - 300 MBps	Single SAS Lane - 600 MBps
		Wide Port (2 lanes) - 600 MBps	Wide Port (2 lanes) - 1200 MBps
		Wide Port (4 lanes) - 1200 MBps	Wide Port (4 lanes) - 2400 MBps
	PCI Card Type	3.3 volt add-in card	
	PCI Voltage	12 V ± 10%	
	PCI Form Factor	6.6" x 2.731" (Low-profile)	
	PCI Power	7.5 Watts	
	Bracket	Full height and Low-profile	
	Certification Level	PCI-Express 1.0a	
	IO Bus	Eight 3Gbps SAS/SATA ports	
	SAS Processor	Intel IOP333 I/O Processor	
	Internal Connectors	One SAS SFF8087 x4 internal connector	
	External Connectors	One SAS SFF8470 x4 external connector	
	Max. Number of SAS Devices	32	
	LED Indicators	On-board activity and fault LEDs	
	Integrated Mirroring	Integrated Mirroring option available	
	Environments	Operating	Storage
	Temperature	0 to 60 C	-45 to +105 C
	Relative Humidity	5 to 90% non-condensing	5 to 90% non-condensing
	MTBF	>200,000 hours	
	Compliances	EMC: Class B-US (CFR 47, P15B); Canada (ICES-003); Japan (V-3/02.04); Europe (EN55022/EN55024); Australia/New Zealand (AS/NZS 3548); Safety: EN60950	
	Operating system support	Microsoft® Windows® XP Professional, XP Professional x64 Red Hat Linux WS3 and WS4	
	Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.	

\* Due to the placement of the I/O controller engine on the SAS 8344ELP, external cables from the SAS 8344ELP RAID controller to the storage enclosure may not be longer than two meters; this card also does not support the use of external fan-out cables. See [http://h20000.www2.hp.com/bizsupport/TechSupport/Document.jsp?lang=en&cc=us&objectID=c00817918&jumpid=reg\\_R1002\\_USEN](http://h20000.www2.hp.com/bizsupport/TechSupport/Document.jsp?lang=en&cc=us&objectID=c00817918&jumpid=reg_R1002_USEN) for additional information

## Technical Specifications - Hard Drives

Serial ATA Hard Drives	750 GB (7,200 rpm)	<b>Capacity</b>	750,156,374,016 bytes	
		<b>Height</b>	1 inches; 2.54 cm	
		<b>Width</b>	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
	<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled		
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3.0 Gb/s		
	<b>Cache</b>	16 MB		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.8 ms	
		<b>Average</b>	14.0 ms	
		<b>Full-Stroke</b>	20 ms	
	<b>Rotational Speed</b>	7,200 rpm		
	<b>Logical Blocks</b>	1,465,149,168		
	<b>Operating Temperature</b>	41° to 131°F (5° to 55°C)		

---

	500 GB (7,200 rpm)	<b>Capacity</b>	500,107,862,016 bytes	
		<b>Height</b>	1 inches; 2.54 cm	
		<b>Width</b>	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
	<b>Interface</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled		
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3.0 Gb/s		
	<b>Cache</b>	16 MB		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.3 ms	
		<b>Average</b>	20.0 ms	
		<b>Full-Stroke</b>	30 ms	
	<b>Rotational Speed</b>	7,200 rpm		
	<b>Logical Blocks</b>	976,773,168		
	<b>Operating Temperature</b>	41° to 131°F (5° to 55°C)		

---

## Technical Specifications - Hard Drives

<b>250 GB</b> (7,200 rpm)	<b>Capacity</b>	250,059,350,016 bytes	
	<b>Height</b>	1 inches; 2.54 cm	
	<b>Width</b>	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
	<b>Interface</b>	Serial ATA (3.0 Gb/s) Native Command Queuing enabled (Model EA788AA only)	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3.0 Gb/s	
	<b>Cache</b>	With NCQ (Model EA788AA): 16 MB Without NCQ (Model PY278AA): 8MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.0 ms
		<b>Average</b>	18.5 ms
		<b>Full-Stroke</b>	18 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	488,397,168	
	<b>Operating Temperature</b>	41° to 131°F (5° to 55°C)	

---

<b>160 GB</b> (7,200 rpm)	<b>Capacity</b>	160,041,885,696 bytes	
	<b>Height</b>	1 inches; 2.54 cm	
	<b>Width</b>	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
	<b>Interface</b>	Serial ATA (3.0 Gb/s)	
	<b>Synchronous Transfer Rate (Maximum)</b>	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
	<b>Cache</b>	8 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.9 ms
		<b>Average</b>	9.3 ms
		<b>Full-Stroke</b>	18 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	312,581,808	
	<b>Operating Temperature</b>	41° to 131°F (5° to 55°C)	

---

## Technical Specifications - Hard Drives

80 GB (7,200 rpm)	<b>Capacity</b>	80,026,361,856 bytes	
	<b>Height</b>	1 inches; 2.54 cm	
	<b>Width</b>	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
	<b>Interface</b>	Serial ATA (3.0 Gb/s)	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 Gb/s	
	<b>Cache</b>	8 MB	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2 ms
		<b>Average</b>	9.3 ms
		<b>Full-Stroke</b>	21 ms
	<b>Rotational Speed</b>	7,200 rpm	
	<b>Logical Blocks</b>	156,301,488	
	<b>Operating Temperature</b>	41° to 131°F (5° to 55°C)	
	<hr/>		
160 GB (10k rpm)	<b>Capacity</b>	160,041,885,696 bytes	
	<b>Height</b>	1 inches; 2.54 cm	
	<b>Width</b>	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
	<b>Interface</b>	Serial ATA (1.5 Gb/s), Native Command Queuing enabled	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 1.5 Gb/s	
	<b>Cache</b>	16 Mbytes	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 ms
		<b>Average</b>	4.6 ms
		<b>Full-Stroke</b>	10.2 ms
	<b>Rotational Speed</b>	10,000 rpm	
	<b>Logical Blocks</b>	312,581,808	
	<b>Operating Temperature</b>	41° to 131°F (5° to 55°C)	

## Technical Specifications - Hard Drives

80 GB (10k rpm)	<b>Capacity</b>	80,026,361,856 bytes		
	<b>Height</b>	1 inches; 2.54 cm		
	<b>Width</b>	Media diameter: 3.0 inches; 7.62 cm Physical size: 4 inches; 10.2 cm		
	<b>Interface</b>	Serial ATA (1.5 Gb/s), Native Command Queuing enabled		
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 1.5 Gb/s		
	<b>Cache</b>	16 Mbytes		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 ms	
		<b>Average</b>	4.6 ms	
		<b>Full-Stroke</b>	10.2 ms	
	<b>Rotational Speed</b>	10,000 rpm		
	<b>Logical Blocks</b>	156,301,488		
	<b>Operating Temperature</b>	41° to 131°F (5° to 55°C)		

Serial Attached SCSI (SAS) 300 GB Hard Drives (15K rpm)	<b>Capacity</b>	300,000,000,000 bytes		
	<b>Height</b>	1.0 in (25.4mm)		
	<b>Width</b>	4.0 in (101.6mm)		
	<b>Interface</b>	SAS		
	<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s		
	<b>Buffer</b>	16 MB		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.2 ms	
		<b>Average</b>	3.5 ms	
		<b>Full-Stroke</b>	6.7 ms	
	<b>Rotational Speed</b>	15,000 rpm		
	<b>Logical Blocks</b>	585,937,500 - 512 byte blocks		
	<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)		

300 GB (10K rpm)	<b>Capacity</b>	300,000,000,000 bytes		
	<b>Height</b>	1.0 in (25.4mm)		
	<b>Width</b>	4.0 in (101.6mm)		
	<b>Interface</b>	SAS		
	<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s		
	<b>Buffer</b>	16 MB		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 msec	
		<b>Average</b>	<4.5 msec	
		<b>Full-Stroke</b>	<11.0 msec	
<b>Rotational Speed</b>	10,000 rpm			

## Technical Specifications - Hard Drives

Logical Blocks	585,937,500 - 512 byte blocks
Operating Temperature	50° to 95° F (10° to 35° C)

<b>146 GB</b> (10K rpm)	<b>Capacity</b>	146,815,737,856 bytes		
	<b>Height</b>	1.0 in (25.4mm)		
	<b>Width</b>	4.0 in (101.6mm)		
	<b>Interface</b>	SAS		
	<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s		
	<b>Buffer</b>	16 MB		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 msec	
		<b>Average</b>	<4.5 msec	
		<b>Full-Stroke</b>	<11.0 msec	
	<b>Rotational Speed</b>	10,000 rpm		
	<b>Logical Blocks</b>	286,749,488 - 512 byte blocks		
	<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)		

<b>73 GB</b> (15K rpm)	<b>Capacity</b>	73,407,865,856 bytes		
	<b>Height</b>	1.0 in (2.54 cm)		
	<b>Width</b>	4.0 in (101.6mm)		
	<b>Interface</b>	SAS		
	<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s		
	<b>Buffer</b>	16 MB		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.2 ms	
		<b>Average</b>	3.5 ms	
		<b>Full-Stroke</b>	7.4 ms	
	<b>Rotational Speed</b>	15,000 rpm		
	<b>Logical Blocks</b>	143,374,738 - 512 byte blocks		
	<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)		

<b>146 GB</b> (15K rpm)	<b>Capacity</b>	146,815,737,856 bytes	
	<b>Height</b>	1.0 in (25.4mm)	
	<b>Width</b>	4.0 in (101.6mm)	
	<b>Interface</b>	SAS	
	<b>Synchronous Transfer Rate (Maximum)</b>	3.0 Gb/s	
	<b>Buffer</b>	16 MB	



## Technical Specifications - Hard Drives

<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.2 ms
	<b>Average</b>	3.5 ms
	<b>Full-Stroke</b>	7.4 ms
<b>Rotational Speed</b>	15,000 rpm	
<b>Logical Blocks</b>	286,749,488 - 512 byte blocks	
<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)	

## Technical Specifications - Removable Storage

HP USB 2.0 Disk on Key	Dimensions (HxWxD)	0.9 x 0.7 x 3.9 inches; 2.3 x 1.8 x 9.8 cm
	Weight	0.05 lb (0.02 kg)
	USB Specification	2.0
	Transfer Rate	Read-1023 KB/Sec; Write-850 KB/Sec
	Storage Media	Solid state flash memory, no moving parts
	Power Supply	USB Bus-powered, no external power required
	Capacity	512 MB or 1 GB

## Technical Specifications - Input/Output Devices

HP IEEE 1394a FireWire 400 3-Port PCI Card	Device Interface Protocol	IEEE-1394a	
	Data Rate	400 Mbps	
	Devices Supported	IEEE-1394 compliant devices	
	Bus Interface	PCI	
	Physical	PCI card with brackets for low profile and full height PCI slots.	
	Environmental	<b>Operating temperature</b>	50° to 131° F (10° to 55° C)
		<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)
		<b>Relative humidity</b>	20% to 80%
	Ports	Two IEEE1394 6-Pin Connector (Rear)	
	Minimum System Requirements	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Windows XP Home, not supported on Linux Pentium II 266 or faster 128-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system Available PCI slot	
	Regulatory Agency Approval	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC	

HP IEEE 1394b FireWire 800 3-Port PCI Card (Windows XP Only)	Device Interface Protocol	IEEE-1394	
	Data Rate	800 Mbps	
	Devices Supported	IEEE-1394 compliant devices	
	Bus Interface	PCI	
	Physical	PCI card with brackets for low profile and full height PCI slots.	
	Environmental	<b>Operating temperature</b>	50° to 131° F (10° to 55° C)
		<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)
		<b>Relative humidity</b>	20% to 80%
	Ports	Two IEEE-1394b bilingual 9-Pin Connector (Rear)	
	Connectors	One 10-Pin header Custom Connector (Internal)	
	Minimum System Requirements	Microsoft Windows XP Professional, Windows XP Home, not supported on Linux Pentium III 128-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system Available PCI slot	

## Technical Specifications - Input/Output Devices

<b>Regulatory Agency Approval</b>	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
-----------------------------------	---

<b>PS/2 OR USB Standard Keyboard</b>	<b>Physical characteristics</b>	<b>Keys</b>	104, 105, 106, 107, 109 layout (depending upon country)
		<b>Dimensions (L x W x H)</b>	18.0 x 6.4 x 0.98 inches; 45.8 x 16.3 x 2.5 cm
	<b>Weight</b>		2 lb (0.9 kg) minimum
	<b>Electrical</b>	<b>Operating voltage</b>	+ 5VDC $\pm$ 5%
		<b>Power consumption</b>	50-mA maximum (with three LEDs ON)
		<b>ESD</b>	CE level 4, 15-kV air discharge
		<b>EMI - RFI</b>	Conforms to FCC rules for a Class B computing device
	<b>Mechanical</b>	<b>Microsoft PC 99 - 2001</b>	Functionally compliant
		<b>Languages</b>	38 available
		<b>Keycaps</b>	Low-profile design
		<b>Switch actuation</b>	55-g nominal peak force with tactile feedback
		<b>Switch life</b>	20 million keystrokes (using Hasco modified tester)
		<b>Switch type</b>	Contamination-resistant switch membrane
		<b>Key-leveling mechanisms</b>	For all double-wide and greater-length keys
		<b>Cable length</b>	6 ft (1.8 m)
		<b>Microsoft PC 99 - 2001</b>	Mechanically compliant
	<b>Environmental</b>	<b>Acoustics</b>	43-dBA maximum sound pressure level
		<b>Operating temperature</b>	50° to 122° F (10° to 50° C)
		<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)
		<b>Operating humidity</b>	10% to 90% (non-condensing at ambient)
		<b>Non-operating humidity</b>	20% to 80% (non-condensing at ambient)
		<b>Operating shock</b>	40 g, six surfaces
		<b>Non-operating shock</b>	80 g, six surfaces
		<b>Operating vibration</b>	2-g peak acceleration
		<b>Non-operating vibration</b>	4-g peak acceleration
		<b>Drop (out of box)</b>	26 inches; 66 cm on carpet, six-drop sequence
		<b>Drop (in box)</b>	42 inches; 107 cm on concrete, 16-drop sequence
	<b>Operating system support</b>	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4	
	<b>Approvals</b>	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, and TUVGS	
	<b>Kit contents</b>	Keyboard, keyboard software media, installation guide, warranty card, safety and comfort	

## Technical Specifications - Input/Output Devices

HP PS/2 Scroll Mouse	Dimensions	3.8 x 6.3 x 11.6 cm (1.5 x 2.5 x 4.6 in)	
	Weight	4.44 oz (126 g)	
	Environmental	Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, 6 surfaces
		Non-operating shock	80 g, 6 surfaces
		Operating vibration	2 g peak acceleration
		Non-operating vibration	4 g peak acceleration
		Drop (out-of-box)	26 inches; 66 cm on carpet, 6-drop sequence
		Drop (out-of-box)	1 m on asphalt tile over concrete, 6-drop sequence
	Electrical	Operating voltage	5 VDC $\pm$ 10%
		Power consumption	15 mA
		System consumption	PS/2 mini-din connector
		ESD	CE level 4, 15 kV air discharge
		EMI-RFI	Conforms to FCC rules for a Class B computing device
	Mechanical	Microsoft PC99 - 2001	Functionally compliant
		Resolution	400 $\pm$ 20% DPI
		Tracking speed	10 in/s maximum
Acceleration		100 in/s	
Switch actuation		65 g nominal peak force	
Switch life		1,000,000 operations (using Hasco modified tester)	
Switch type		Low force micro-switches	
Tracking mechanism life		155 mi (250 km) at average speed of 10 in/s	
Cable length		6 ft (1.8 m)	
Microsoft PC99 - 2001		Mechanically compliant	
Scroll wheel	Width	8 mm	
	Diameter	0.99 inches; 25.2 mm	
	Maximum rotation speed	30 mm/s	
	Switch type	Light force micro-switch	
	Switch life	1 million operations	
Regulatory approvals	Mechanical life	Minimum 200,000 revolutions	
	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	

## Technical Specifications - Input/Output Devices

<b>Compatibility</b>	<b>Operating system support</b>	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4
----------------------	---------------------------------	---

<b>HP 2-button Optical Scroll Mouse (USB)</b>	<b>Dimensions (H x L x W)</b>	1.5 x 4.5 x 2.5 inches; 3.8 x 11.6 x 6.3 cm
	<b>Weight</b>	0.27 lb (0.12 kg)
	<b>Cable length</b>	72.8 inches; 185 cm
	<b>System requirements</b>	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4

<b>HP Optical 3-Button Mouse (USB)</b>	<b>Dimensions/Weight</b>	<b>Height</b>	1.5 inches; 3.76 cm
		<b>Length</b>	4.5 inches; 11.56 cm
		<b>Width</b>	2.4 inches; 6.19 cm
		<b>Weight</b>	3.80 oz (108 g)
	<b>Environmental</b>	<b>Operating temperature</b>	32° to 104° F (0° to 40° C)
		<b>Non-operating temperature</b>	-4° to 140° F (-20° to 60° C)
		<b>Operating humidity</b>	10% to 90% (non condensing at ambient)
	<b>Mechanical</b>	<b>Tracking speed</b>	6 in/s Maximum
		<b>Switch life</b>	3,000,000 operations
		<b>Switch type</b>	Micro-switches
		<b>Tracking mechanism life</b>	155 miles (250 km) at average speed of 10 in/s
		<b>Cable length</b>	9.5 ft (2.9 m)
		<b>System requirements</b>	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4

## Technical Specifications - Input/Output Devices

<b>HP SpacePilot 3D USB Intelligent Controller</b> (model EF390AA)	<b>Physical Characteristics</b>	<b>Dimensions (L x W x H)</b>	9.3 x 5.6 x 2.0 inches; 236 x 143 x 53 mm
		<b>Weight</b>	1.875 lb (0.85 kg)
	<b>Mechanical</b>	<b>Palmrest</b>	Sculpted
		<b>Buttons</b>	21 + programmable speed keys 15 reprogrammable
		<b>LCD Viewing Area</b>	(W x H) 4.1 x 1.2 inches; 102 x 30 mm
		<b>Active Area</b>	(W x H) 3.9 x 1.0 inches; 98 x 26 mm
	<b>System Requirements</b>	<b>Display Format</b>	240 x 64
		<b>Motion Controller</b>	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)
		<b>Device Sensitivity</b>	Adjustable to preference
		Intel Pentium 4 or AMD Athlon processor based system 20 megabytes free disk space for driver and plug-in installation (CD-ROM device required) USB 1.1 or 2.0	
<b>Operating System Supported</b>		Microsoft Windows 2000 and XP	
<b>Regulatory Approvals</b>	FCC, CE		

<b>HP SpaceExplorer (USB - Windows Only)</b>	<b>Physical Characteristics</b>	<b>Dimensions (L x W x H)</b>	7.6 x 5.4 x 2.3 in (194 x 139 x 58mm)
		<b>Weight</b>	1.36 lbs (0.62 kg)
	<b>Mechanical</b>	<b>Palmrest</b>	Sculpted
		<b>Buttons</b>	15 reprogrammable speed keys
		<b>Motion Controller</b>	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)
		<b>Device Sensitivity</b>	Adjustable to preference
	<b>System Requirements</b>	USB 1.1 or 2.0	
	<b>Operating System Supported</b>	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP, not supported in Linux	
	<b>Regulatory Approvals</b>	FCC, CE	

## Technical Specifications - Optical Devices

HP 16X/48X DVD-ROM Drive	<b>Height</b>	5.25", half-height, tray load	
	<b>Interface Type</b>	ATAPI/EIDE	
	<b>Dimensions (W x H x D)</b>	5.88 x 1.71 x 7.87 [max] inches; 149.5 x 43.25 x 200.0 [max] mm (external, excluding bezel)	
	<b>Disc Formats</b>	DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+RW; DVD+R ; CD-ROM Mode 1 and 2; CD-DA; CD-ROM XA Mode 2, Form 1 and 2; CD-extra; CD-text; CD-I Mode 2, Form 1 and 2; CD-I ready; video CD, CD-bridge; PhotoCD (single and multi-session); CD-R; CD-RW	
	<b>Disc Capacity</b>	<b>DVD-ROM</b>	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)
		<b>CD-ROM</b>	540 MB (Mode 1, 12 cm), 640 MB (Mode 2, 12 cm), 700 MB (80 minimum CD-R and CD-RW), 180 MB (8 cm)
	<b>Access Times</b> (typical reads, including settling)	<b>DVD-ROM Single Layer</b>	120 ms
		<b>CD-ROM Mode 1</b>	90 ms
		<b>Full Stroke DVD</b>	240 ms (seek)
		<b>Full Stroke CD</b>	160 ms (seek)
		<b>Startup Time</b>	< 10 seconds (typical)
		<b>Stop Time</b>	< 4 seconds
		<b>Data Transfer Modes</b>	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)
	<b>Maximum Data Transfer Rates</b>	<b>CD-ROM Read</b>	6000 KB/s (40X) Max
		<b>DVD-ROM Read</b>	21,600 KB/s (16X) Max
		<b>Digital Audio Extraction</b>	6000 KB/s (40X) Max
	<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
		<b>DC Power Requirement</b>	5 VDC $\pm$ 5% – 100 mV ripple p-p
			12 VDC $\pm$ 5% – 200 mV ripple p-p
	<b>Audio Output</b>	<b>DC Current</b>	5 VDC – <800 mA typical, < 1000 mA maximum
		<b>Line-Out</b>	0.7 VRMS
		<b>Signal-to-Noise Ratio</b>	85 dB
<b>Configuration Jumper Block</b>	<b>Channel Separation</b>	65 dB	
		Master, slave, and cable select modes	
	<b>Data Interface Connector</b>	40-pin, shrouded and keyed, flat ribbon	



### Technical Specifications - Optical Devices

<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b> (operating)	41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b> (operating)	10% to 85%
	<b>Maximum Wet Bulb Temperature</b> (operating)	86° F (30° C)
<b>Certifications, Approvals</b>	MMC II support, multi-read certification, Microsoft WHQL certification, ACA AS/NZS 3548 class B, CNS 13438, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992	
<b>Operating Systems Supported</b>	Microsoft Windows 2000, Windows XP Professional	
<b>Kit Contents</b>	16X/48X DVD-ROM Drive, InterVideo WinDVD MPEG Movie Playback software, audio cable, and installation guide.	

<b>HP 48X Max SATA CD-RW/DVD-ROM Combo Drive</b>	<b>Form Factor</b>	5.25-inch, half-height, tray-load		
	<b>Orientation</b>	Either horizontal or vertical		
	<b>Interface type</b>	SATA/ATAPI		
	<b>Disc capacity</b>	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)		
	<b>Dimensions (W x H x D)</b>	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
	<b>Weight (max)</b>	2.6 lb (1.2 kg)		
	<b>Write speed</b>	<b>CD-R</b>	Up to 48X	
		<b>CD-RW</b>	Up to 32X	
		<b>DVD+R/-R/+RW/-RW/+R DL /-R DL</b>	Up to 8X	
	<b>Read speeds</b>	<b>DVD-ROM</b>	Up to 16X	
		<b>CD-ROM, CD-R</b>	Up to 48X	
		<b>CD-RW</b>	Up to 32X	
		<b>Buffer Size</b>	1.5MB (Min)	
	<b>Access times</b> (typical reads, including setting)	<b>Random</b>	DVD: < 140 ms (typical), CD: < 125 ms (typical)	
		<b>Full Stroke</b>	DVD: < 250 ms (seek), CD: < 210 ms (seek)	
	<b>Power</b>	<b>Source</b>	SATA DC power receptacle	
		<b>DC Power Requirement</b>	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p	
<b>DC Current</b>		5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum		
<b>Total Drive Power</b> (standby mode)		< 2.5 Watt		

## Technical Specifications - Optical Devices

<b>Environmental</b> (all conditions non-condensing)	<b>Temperature</b> (operating) 41° to 122° F (5° to 50° C) <b>Relative Humidity</b> (operating) 10% to 90% <b>Maximum Wet Bulb Temperature</b> (operating) 86° F (30° C)
<b>Operating Systems Supported</b>	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 4 & 5 Desktop No driver is required for this device. Native support is provided by the operating system.
<b>Option kit contents</b>	HP 48X Max SATA CD-RW/DVD-ROM Combo Drive, Roxio Easy Media Creator version 9, Intervideo WinDVD, CD-R media, high-speed CD-RW media, and installation guide.

### HP 16X Max SATA DVD+/-RW LightScribe Drive

<b>Form Factor</b>	5.25-inch, half-height, tray-load
<b>Orientation</b>	Either horizontal or vertical
<b>Interface type</b>	SATA/ATAPI
<b>Disc capacity</b>	8.5 GB DL or 4.7 GB standard
<b>Dimensions (W x H x D)</b>	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)
<b>Weight (max)</b>	2.6 lb (1.2 kg)
<b>Write speed</b>	DVD+R Up to 16X DVD+RW Up to 8X DVD+R DL Up to 8X DVD-R DL Up to 4X DVD-R Up to 16X DVD-RW Up to 6X DVD-RAM Up to 12X CD-R Up to 48X CD-RW Up to 32X
<b>Read speeds</b>	DVD-RAM Up to 12X DVD+RW, DVD-RW, DVD+R DL, DVD-R DL Up to 8X DVD-ROM, DVD+R, DVD-R Up to 16X CD-ROM, CD-R Up to 48X CD-RW Up to 32X
<b>Access times</b> (typical reads, including setting)	<b>Random</b> DVD: < 130 ms (typical), CD: < 120 ms (typical) <b>Full Stroke</b> DVD: < 240 ms (seek), CD: < 200 ms (seek)
<b>Power</b>	<b>Source</b> SATA DC power receptacle <b>DC Power Requirement</b> 5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p

## Technical Specifications - Optical Devices

	<b>DC Current</b>	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
	<b>Total Drive Power (standby mode)</b>	< 2.5 Watt
<b>Environmental</b> (all conditions non-condensing)	<b>Temperature (operating)</b>	41° to 122° F (5° to 50° C)
	<b>Relative Humidity (operating)</b>	10% to 90%
	<b>Maximum Wet Bulb Temperature (operating)</b>	86° F (30° C)
<b>Operating Systems Supported</b>	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 4 & 5 Desktop No driver is required for this device. Native support is provided by the operating system.	
<b>Option kit contents</b>	* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit <a href="http://www.windowsvista.com/upgradeadvisor">http://www.windowsvista.com/upgradeadvisor</a> . For Windows Vista system requirements, visit <a href="http://www.windowsvista.com/systemrequirements">http://www.windowsvista.com/systemrequirements</a> . HP 16X DVD+-RW SuperMulti LightScribe drive, LightScribe software, Roxio Easy Media Creator version 9, Intervideo WinDVD Software, installation guide, and DVD+R media. Software is Microsoft Windows only.	

## Technical Specifications - Graphics

<p>NVIDIA Quadro NVS 285 Form Factor 128MB PCIe Dual Display</p>	<p><b>Graphics Controller</b> <b>Bus Type</b> <b>Memory</b> <b>Connectors</b> <b>Dimensions</b> <b>Multi-monitor support</b> <b>RAMDAC</b> <b>Maximum pixel clock</b> <b>Overlay planes</b> <b>High-definition Video Processor (HDVP)</b></p>	<p>Nvidia Quadro NVS 285 128MB PCIe Dual Display Low profile, both ATX and low profile brackets included Integrated Quadro 285 2D graphics processor unit (GPU) PCI-Express 128 MB DDR2 Single high-density DMS-59 Flex Connector Low-profile, 2.586 x 6.6 inches; 6.57 x 16.76 cm Dual analog or digital monitors Dual 350 MHz (integrated) 350 MHz One 16-bit Video overlay plane Full screen, full frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware colour controls for video overlay Hardware colour-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling</p>
	<p><b>Available graphics drivers</b></p>	<p>Microsoft Windows Vista Business 32 and 64, Microsoft Windows 2000 and Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://www.hp.com/country/us/en/support.html?pageDisplay=drivers">http://www.hp.com/country/us/en/support.html?pageDisplay=drivers</a></p>
	<p><b>Option kit Contents</b></p>	<p>NVIDIA Quadro NVS 285 128MB PCIe Graphics Card with full height bracket attached, DMS 59 to dual DVI Y cable, DMS 59 to dual VGA Y cable, low profile bracket, Workstation Software Driver CD, Desktop Software Driver CD, documentation.</p>

<p>NVIDIA Quadro NVS 440 Form Factor 256 MB Graphics Controller</p>	<p><b>Graphics Controller</b> <b>VGA controller</b> <b>Bus Type</b> <b>RAMDAC</b> <b>Memory</b> <b>Connector</b> <b>Controller clock speed</b> <b>Colour planes</b> <b>Overlay planes</b> <b>Maximum pixel clock</b> <b>Multi-Monitor Support</b> <b>Single DVI Support</b> <b>Dual DVI Support</b></p>	<p>ATX 2 nv43 2D graphics processor units (GPUs) Integrated into the Quadro GPU PCI-E x16 Dual 350 MHz 256 MB DDR frame buffer and Texture storage (128MB per GPU) Two DMS-59 250 MHz 32-bit colour buffer 1 16-bit Video overlay plane 350 MHz Up to 4 analog or digital monitors Yes Yes</p>
---	---	--

## Technical Specifications - Graphics

<b>High-definition Video Processor (HDVP)</b>	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware colour controls for video overlay Hardware colour-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
<b>Available graphics drivers</b>	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode ) HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .

---

<b>NVIDIA Quadro FX 1500 PCI-Express graphics controller</b>	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	NVIDIA NV71GL
	<b>Bus Type</b>	PCI Express x16
	<b>Memory</b>	256MB GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	2 dual-link DVI-I + 9-pin HDTV output
	<b>Display resolution support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). HD-Out component Mode: YPrPB - SMPTE 1080i, 720p, 480p, 576p or composite Mode: NTSC/PAL 480i, 576i NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	<b>RAMDAC</b>	Dual 400MHz integrated
	<b>Architecture features</b>	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit colour precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated anti-aliased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz)
	<b>Shading architecture</b>	Fully programmable GPU Long fragment programs (unlimited instructions) Long vertex programs (unlimited instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution

## Technical Specifications - Graphics

<b>Supported graphics APIs</b>	OpenGL 2.0 DirectX 9.0
<b>Available graphics drivers</b>	Microsoft Windows Vista 32 and 64, Microsoft Windows Vista 32 and 64, Microsoft Windows XP Professional qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .

### ATI FireGL™ V3350 (Part# RV705AA)

<b>Form factor</b>	ATX
<b>Graphics controller</b>	RV515
<b>Bus type</b>	PCI-Express x16
<b>Memory</b>	256 MB DDR unified frame buffer, Z-buffer and Texture storage
<b>Connectors</b>	Dual DVI-I analog/digital, dual VGA analog support with DVI-to-VGA adapters.
<b>Display resolution support</b>	Analog support for 2048x1536 @ 85Hz on each output connector. Digital support for 1920x1200 @ 60Hz on each output connector.
<b>RAMDAC</b>	Dual 10-bit per channel 400MHz
<b>Architecture features</b>	<ul style="list-style-type: none"> <li>• 2x/4x/6x Anti-aliasing modes; multi-sample algorithm with gamma correction, programmable sparse sample patterns, and centroid sampling</li> <li>• 2x/4x/8x/16x Anisotropic Filtering modes; up to 128-tap texture filtering</li> <li>• High resolution texture support (up to 4K x 4K)</li> <li>• Hardware supported overlays, anti-aliased points and lines, 2 sided lighting, occlusion culling</li> </ul>
<b>Avivo video and display platform</b>	<ul style="list-style-type: none"> <li>• 64-bit per pixel floating point HDR supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing</li> <li>• 32-bit integer HDR (10:10:10:2) format supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing</li> </ul>
<b>Programmable video processor</b>	<ul style="list-style-type: none"> <li>• Accelerated MPEG-2, MPEG-4, DivX, WMV9, VC-1 and H.264 decoding and transcoding</li> <li>• Seamless pixel shader integration with video in real-time</li> </ul>
<b>Display output</b>	<ul style="list-style-type: none"> <li>• 16-bit per channel floating point HDR and 10 bit per channel DVI output</li> <li>• Programmable piecewise linear gamma correction, colour correction, and colour space conversion (10-bits per colour)</li> <li>• Complete independent colour controls and video overlays for each display</li> <li>• High quality pre- and post-scaling engines with underscan support for all outputs</li> <li>• Content-adaptive de-flicker filtering for interlaced displays</li> <li>• Spatial/temporal dithering enables 10-bit colour quality on 8 and 6-bit displays</li> <li>• VGA mode support on all outputs</li> </ul>
<b>Shading architecture</b>	<ul style="list-style-type: none"> <li>• Supports Microsoft DirectX 9.0 Shader Model 3.0 programmable vertex and pixel shaders in hardware</li> <li>• Full speed 128-bit floating point processing for all shader operations</li> <li>• Dedicated branch-execution units for high performance dynamic branching and flow control</li> </ul>

### Technical Specifications - Graphics

- Dedicated texture address units for improved efficiency
- Up to 128 simultaneous pixel threads
- Multiple Render Target (MRT) support
- Render to vertex buffer support

**Supported graphics APIs** OpenGL 2.0  
DirectX 9.0

**Available graphics drivers** Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional qualified drivers may be preloaded or available from the HP support Web site:  
[http://welcome.hp.com/country/us/eng/software\\_drivers.html](http://welcome.hp.com/country/us/eng/software_drivers.html).  
HP-tested Windows XP and Linux

---

NVIDIA Quadro FX 1500 PCI-Express graphics controller	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	NVIDIA NV71GL
	<b>Bus Type</b>	PCI Express x16
	<b>Memory</b>	256MB GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	2 dual-link DVI-I + 9-pin HDTV output
	<b>Display resolution support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). HD-Out component Mode: YPrPB - SMPTE 1080i, 720p, 480p, 576p or composite Mode: NTSC/PAL 480i, 576i NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	<b>RAMDAC</b>	Dual 400MHz integrated
	<b>Architecture features</b>	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit colour precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated anti-aliased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz)
	<b>Shading architecture</b>	Fully programmable GPU Long fragment programs (unlimited instructions) Long vertex programs (unlimited instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
	<b>Supported graphics APIs</b>	OpenGL 2.0 DirectX 9.0

## Technical Specifications - Graphics

**Available graphics drivers** Microsoft Windows Vista 32 and 64, Microsoft Windows Vista 32 and 64, Microsoft Windows XP Professional qualified drivers may be preloaded or available from the HP support Web site:  
[http://welcome.hp.com/country/us/eng/software\\_drivers.html](http://welcome.hp.com/country/us/eng/software_drivers.html).

ATI FireGL V7200 graphics card	<b>Form factor</b> <b>Graphics controller</b> <b>Bus type</b> <b>Memory</b>  <b>Connectors</b>  <b>Maximum Resolution</b>   <b>RAMDAC</b> <b>Ring Bus memory controller</b> <b>Image quality features</b>	ATX R520 PCI-Express x16 256MB GDDR3 graphics memory with unified frame buffer, Z-buffer and Texture storage and a 512-bit Ring-Bus memory controller Dual DVI-I analog/digital, dual VGA analog support with DVI-to-VGA adapters. The DVI-I digital connectors are Dual Link capable. Stereoscopic 3D output connector with quad buffer support, HD Component Video (YPrPb) output with optional adapter. Analog support for 2048x1536 @ 85Hz on each output connector. Digital support for 1920x1200 @ 60Hz on each output connector. Dual Link digital support for 2560x1600 @ 60Hz. Ideal for 30-inch widescreen displays. <b>NOTE: Stereo supported on single display only.</b> Dual 10-bit per channel 400MHz <ul style="list-style-type: none"> <li>• 512-bit internal ring bus for highly efficient memory reads</li> <li>• Programmable intelligent arbitration logic</li> </ul> <ul style="list-style-type: none"> <li>• 2x/4x/6x Anti-aliasing modes; multi-sample algorithm with gamma correction, programmable sparse sample patterns, and centroid sampling</li> <li>• 2x/4x/8x/16x Anisotropic Filtering modes; up to 128-tap texture filtering</li> <li>• High resolution texture support (up to 4K x 4K)</li> <li>• Hardware supported overlays, anti-aliased points and lines, 2 sided lighting, occlusion culling</li> </ul>
<b>Avivo video and display platform</b>  <b>Programmable video processor</b>  <b>Display output</b>	<ul style="list-style-type: none"> <li>• 64-bit per pixel floating point HDR supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing</li> <li>• 32-bit integer HDR (10:10:10:2) format supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing</li> <li>• Accelerated MPEG-2, MPEG-4, DiVX, WMV9, VC-1 and H.264 decoding and transcoding</li> <li>• Seamless pixel shader integration with video in real-time</li> </ul> <ul style="list-style-type: none"> <li>• 16-bit per channel floating point HDR and 10 bit per channel DVI output</li> <li>• Programmable piecewise linear gamma correction, colour correction, and colour space conversion (10-bits per colour)</li> <li>• Complete independent colour controls and video overlays for each display</li> <li>• High quality pre- and post-scaling engines with underscan support for all outputs</li> <li>• Content-adaptive de-flicker filtering for interlaced displays</li> <li>• Xilleon TV encoder for high quality analog support</li> <li>• Spatial/temporal dithering enables 10-bit colour quality on 8 and 6-</li> </ul>	



## Technical Specifications - Graphics

<b>Shading architecture</b>	<ul style="list-style-type: none"> <li>bit displays</li> <li>• VGA mode support on all outputs</li> <li>• Supports Microsoft DirectX 9.0 Shader Model 3.0 programmable vertex and pixel shaders in hardware</li> <li>• Full speed 128-bit floating point processing for all shader operations</li> <li>• Dedicated branch-execution units for high performance dynamic branching and flow control</li> <li>• Dedicated texture address units for improved efficiency</li> <li>• Up to 512 simultaneous pixel threads</li> <li>• Multiple Render Target (MRT) support</li> <li>• Render to vertex buffer support</li> </ul>
<b>Supported graphics APIs</b>	OpenGL 2.0 DirectX 9.0
<b>Available graphics drivers</b>	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> . HP-tested Windows XP and Linux

---

<b>NVIDIA Quadro FX 3500 PCI-Express graphics controller</b>	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	NVIDIA NV71GL-U
	<b>Bus Type</b>	PCI-Express x16
	<b>Memory</b>	256MB 700MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	2 dual-link DVI-I + 3-pin Mini DIN stereo output
	<b>Display resolution support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	<b>Maximum Resolution</b>	Dual DVI-I output - drives dual digital displays at resolutions up to 1920x1200 @ 60Hz (single-link) and 3840x2400 @ 24Hz (dual-link). Internal 400MHz RAMDACs - drives dual analog displays up to 2048x1536 @ 75Hz each
	<b>RAMDAC</b>	Dual 400MHz integrated
	<b>Architecture Features</b>	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit colour precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated anti-aliased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo

## Technical Specifications - Graphics

	Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz) SLI Link
<b>Shading Architecture</b>	Fully programmable GPU (OpenGL 2.0/DirectX 9.0c class) Long fragment programs (unlimited instructions) Long vertex programs (unlimited instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
<b>Supported Graphics APIs</b>	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
<b>Available Graphics Drivers</b>	Microsoft Windows Vista 32 and 64, Microsoft Windows Vista 32 and 64, Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .

<b>NVIDIA Quadro FX 4500, Bus Type</b>	PCI Express x16
<b>512 MB with optional G-Sync</b>	
<b>RAMDAC</b>	Dual 400 MHz integrated
<b>Memory</b>	512 MB GDDR3 SDRAM unified graphics memory
<b>Connectors</b>	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
<b>Display resolution support</b>	Dual integrated display controllers supporting up to 2048x1536 @ 75Hz (analog) or 3840x2400 @ 41Hz (digital) on both displays
<b>NVIDIA Quadro FX 4500 architecture</b>	256-bit memory interface 35.2GB/sec. memory bandwidth Full 128-bit floating point colour precision 12-bit subpixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall 12 pixels per clock rendering engine Hardware accelerated antialiased points & lines Hardware OpenGL® overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware two-sided lighting 3rd-generation occlusion culling OpenGL quad-buffered stereo Hardware-Accelerated Pixel Read-Back
<b>Shading Architecture</b>	16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling Fully programmable GPU (OpenGL2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control

## Technical Specifications - Graphics

High Level Shader Languages	Conditional execution Optimized compiler for Cg and Microsoft® HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
High-Resolution Antialiasing	12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 16x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200
Display Resolution Support	Dual Dual Link DVI-I output-drives digital displays at resolutions up to 3840 x 2400 @ 41Hz Internal 400 MHz DACs - Two analog displays up to 2048x1536 @ 75 Hz each
nView Architecture	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows®.
Optional G-Sync	Delivers Frame lock/Genlock functionality to unprecedented levels of industrial realism, visualization and collaborative capabilities. Frame lock allows the display channels from multiple workstations to be synchronized, thus creating one large "virtual display" that can be driven by a multisystem cluster for performance scalability, while Genlock allows the graphics output to be synchronized to an external source, typically for film and broadcast video applications. The NVIDIA Quadro G-Sync requires an NVIDIA Quadro FX 4500 graphics controller and an available expansion slot.
Supported Graphics APIs	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
Available Graphics drivers	Microsoft Windows Vista 32 and 64, Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a>

---

NVIDIA Quadro FX 4600 (768 MB)	Graphics Controller	NVIDIA Quadro FX 4600 Workstation GPU
	Bus Type	PCI Express x16
	RAMDAC	Dual 400 MHz integrated
	Memory	768 MB GDDR3 SDRAM unified graphics memory
	Connectors	2 Dual-Link DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
	Multi-monitor Support	Dual integrated display controllers supporting up to to 2560x1600 @ 60Hz (both analog and digital) on both displays
	NVIDIA Quadro FX 4600 Architecture	384-bit memory interface 67.2 GB/sec. memory bandwidth Full 128-bit floating point colour precision 12-bit subpixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall Hardware accelerated antialiased points & lines Hardware OpenGL® overlay planes

## Technical Specifications - Graphics

	Hardware accelerated two-sided lighting
	Hardware accelerated clipping planes
	Hardware two-sided lighting
	3rd-generation occlusion culling
	OpenGL quad-buffered stereo
	Hardware-Accelerated Pixel Read-Back
<b>Shading Architecture</b>	16 textures per pixel in fragment programs
	Window ID clipping functionality
	Hardware accelerated line stippling
	Fully programmable GPU (OpenGL2.0/DirectX 9.0c class)
	Long fragment programs (up to 65,536 instructions)
	Long vertex programs (up to 65,536 instructions)
	Looping and subroutines (up to 256 loops per vertex program)
	Dynamic flow control
	Conditional execution
<b>High Level Shader Languages</b>	Optimized compiler for Cg and Microsoft® HLSL
	OpenGL 2.0 and DirectX 9.0c support
	Open source compiler
<b>High-Resolution Antialiasing</b>	12-bit subpixel sampling precision enhances AA quality
	Rotated-grid full-scene antialiasing (RG FSAA)
	16x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200
<b>Display Resolution Support</b>	Dual Dual Link DVI-I output-drives digital displays at resolutions up to 2560 x 1600 @ 60Hz
	Internal 400 MHz DACs – Two analog displays up to 2560x1600 @ 60 Hz
<b>nView Architecture</b>	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows®.
<b>Supported Graphics APIs</b>	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
<b>Available Graphics drivers</b>	Microsoft Windows XP Professional, Microsoft Windows Vista Professional, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a>

### Technical Specifications - Monitors

HP L1965 Flat Panel Monitor	Panel	<b>Type</b>	Active matrix, thin film transistor (TFT)
		<b>Viewable Image Area</b> (diagonal)	19 inches; 48.25 cm maximum viewable
		<b>Screen Opening</b> (WxH)	14.9 x 12.0 inches; 38.0 x 30.5 cm
		<b>Viewing Angle</b> (typical)	178 degrees horizontal/178 degrees vertical (10:1 minimum contrast ratio)
		<b>Brightness</b> (typical)	300 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio</b> (typical)	1000:1 (typical)
		<b>Response Rate</b> (typical)	6 ms (typical gray to gray)**
		<b>Pixel Pitch</b>	0.294 mm
		<b>Backlight Lamp Life</b> (to half brightness)	50K hours
		* All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.	
		** 20 ms rise and fall	
	<b>Video/Other Inputs</b>	<b>Plug and Play</b>	Yes (supports VESA DDC2B and DDC/CI; PC2001 compliant)
		<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (cable included)
		<b>Input Signal</b>	Two DVI-I connectors (VGA analog or digital)
		<b>Input Impedance</b>	75 ohms $\pm$ 2%
		<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)
		<b>Video Cable</b>	One DVI-D to DVI-D, and 1 DVI-I to VGA cables
		<b>Video Cable Length</b>	71 in (1.8 m)
	<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	24 to 83 kHz
		<b>Vertical Frequency</b>	48 to 76 Hz
		<b>Native Resolution</b>	1280 x 1024 @ 75 Hz analog 1280 x 1024 @ 60 Hz digital
		<b>Maximum Resolution</b> (Analog)	1280 x 1024 @ 75 Hz analog
		<b>Maximum Resolution</b> (Digital)	1280 x 1024 @ 75 Hz digital
		<b>Preset VESA Graphic Modes</b> (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz
		<b>Preset MAC Mode</b>	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz
		<b>Preset VGA Mode</b>	640 x 480 @ 60 Hz, 72 Hz
		<b>Preset SUN Mode</b>	1152 x 900 @ 76 Hz

## Technical Specifications - Monitors

	<b>Fail Safe Mode</b>	Yes (limits out of range signal messages)
	<b>Maximum Pixel Clock Speed</b>	140 MHz
	<b>User Programmable Modes</b>	Yes, 15
	<b>Anti-Glare</b>	Yes
	<b>Anti-Static</b>	Yes
	<b>AssetControl</b>	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)
	<b>Default Colour Temperature</b>	Yes (6500k, 9300k, SRGB, Custom User)
<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch
	<b>Languages</b>	English, Spanish, French, German, Netherlands, Italian, Japanese, Simplified Chinese
	<b>User Controls</b>	Size and Positioning Contrast Brightness Clock, Clock Phase Selectable Colour Temperature Serial Number Mode Displayed Sleep Timer Input Selection Factory Reset
<b>Power</b>	<b>Power Supply</b>	Auto-ranging, 90 to 265 VAC; internal power supply
	<b>Input Power</b>	100 ~ 240 VAC
	<b>Nominal Current</b>	1.5 A maximum
	<b>Frequency</b>	50 ~ 60 Hz
	<b>Typical Power Consumption</b>	< 35 watts
	<b>Maximum</b>	< 55 watts
	<b>Power Saving</b>	< 2 watts
	<b>Off Mode</b>	0 watts (when master power switch is in the off position)
	<b>Power Cable Length</b>	74.8 in (1.9 m); non-captive
<b>Mechanical</b>	<b>Dimensions (H x W x D)</b>	<b>Unpacked with stand</b> 14.85 min to 18.79 max x 15.9 x 8.78 inches (37.72 min to 47.72 max x 40.39 x 22.29 cm)
		<b>Base Area (Footprint D x W)</b> 8.78 x 11.88 inches (22.29 x 30.18 cm)
		<b>Panel only (without stand) (H x W x D)</b> 12.96 x 15.9 x 2.4 inches (32.91 x 40.39 x 6.1 cm)

### Technical Specifications - Monitors

	<b>Weight</b>	<b>Unpacked with stand</b>	15.6 lbs (7.06 kg)
		<b>Unpacked without stand</b>	9.26 lbs (4.19 kg)
		<b>Packaged</b>	20.5 lbs (9.27 kg)
	<b>Bezel Width</b>	12.5 mm left and right, 12.75 mm top and bottom	
	<b>Tilt Range</b>	-4 degrees to +30 degrees	
	<b>Swivel Range</b>	± 45 degrees horizontal swivel	
	<b>Height Adjustable</b>	Yes (4 in/100mm adjustment range)	
	<b>Pivot Rotation</b>	Yes, 90 degrees	
	<b>Base</b>	Ships attached and is removable	
<b>Environmental</b>	<b>Temperature – Operating</b>	41° to 95° F (5° to 35° C)	
	<b>Temperature – Non-operating</b>	-4° to 140° F (-20° to 60° C)	
	<b>Humidity – Operating</b>	20% to 80%	
	<b>Humidity – Non-operating</b>	5% to 95%	
	<b>Altitude – Operating</b>	0 to 12,000 ft (0 to 3,658 m)	
	<b>Altitude – Non-operating</b>	0 to 40,000 feet; 0 to 12,192 m	
<b>Environmental Data</b>	<b>Eco-Label Certifications and Declarations</b>	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:	

- US Energy Star
- CECP

Energy Consumption (in accordance with US Energy Star test method)	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
<b>Normal Operation</b>	35.7 watts	35.6 watts	35.1 watts
<b>Sleep</b>	1.08 watts	1.14watts	1.23 watts
<b>Off</b>	0.93 watts	0.94 watts	0.92 watts
<b>Heat Dissipation*</b>	100 VAC, 50 Hz	115 VAC, 60 Hz	230 VAC, 50 Hz
<b>Normal Operation</b>	121.7 BTU/hr	121.4 BTU/hr	119.7 BTU/hr
<b>Sleep</b>	3.68 BTU/hr	3.89 BTU/hr	4.19 BTU/hr
<b>Off</b>	3.17 BTU/hr	3.21 BTU/hr	3.14 BTU/hr

\*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

<b>Longevity and Upgrading</b>	Upgradeability features contained in the product include: One upstream and four downstream USB ports
<b>Ergonomics</b>	The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays.
<b>Additional Information</b>	This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive, 2002/95/EC. This HP product is designed to comply with the Waste

### Technical Specifications - Monitors

	<p>Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.</p> <p>Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.</p> <p>Display meets the requirement for low frequency electromagnetic fields per MPR-II, TCO, and prEN50279 A/B/C.</p> <p>This product contains 100% recycled materials (by wt.)</p> <p>This product is 100% recycleable when properly disposed of at end of life.</p> <p>Packaging Materials</p> <ul style="list-style-type: none"><li>● Corrugated - 0.955 kg</li><li>● Plastic (other) - 0.055 kg</li><li>● Polystyrene - 0.24 kg</li></ul>
<b>Material Usage</b>	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html">http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html</a>):</p> <ul style="list-style-type: none"><li>● Asbestos</li><li>● Certain Azo Colorants</li><li>● Certain Brominated Flame Retardants - may not be used as flame retardants in plastics</li><li>● Cadmium</li><li>● Chlorinated Hydrocarbons</li><li>● Chlorinated Paraffins</li><li>● Formaldehyde</li><li>● Halogenated Diphenyl Methanes</li><li>● Lead carbonates and sulfates</li><li>● Lead and Lead compounds</li><li>● Mercuric Oxide Batteries</li><li>● Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.</li><li>● Ozone Depleting Substances</li><li>● Polybrominated Biphenyls (PBBs)</li><li>● Polybrominated Biphenyl Ethers (PBBEs)</li><li>● Polybrominated Biphenyl Oxides (PBBOs)</li><li>● Polychlorinated Biphenyl (PCB)</li><li>● Polychlorinated Terphenyls (PCT)</li><li>● Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.</li><li>● Radioactive Substances</li><li>● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)</li></ul>
<b>Packaging</b>	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p>



- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

**End-of-life Management and Recycling**

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

**Hewlett-Packard Corporate Environmental Information**

For more information about HP's commitment to the environment:  
 Global Citizenship Report  
<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>  
 Eco-label certifications  
<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>  
 ISO 14001 certificates:  
<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

**Options**

**HP Silver Flat Panel Speaker Bar**

Powered directly by the monitor or PC, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately, part number EE418AA. For more information, refer to the HP Flat Panel Speaker Bar QuickSpecs.

**Other**

**Accessories Included**

One DVI-D to DVI-D cable, one DVI-I to VGA cable, one USB cable, and CD-ROM with Pivot Pro software, HP Display Assistant software, and HP Display LiteSaver software.

**Software**

Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.

### Technical Specifications - Monitors

HP Display Assistant is a software utility that allows monitor adjustment, colour calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected desktop PC.

HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.

<b>User Guide Languages</b>	English, Bahasa, B. Portuguese, French, LA Spanish, Korean, Simplified Chinese, Traditional Chinese, Japanese, Danish, Dutch, Finnish, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish
<b>Warranty Languages</b>	English
<b>Colour</b>	Carbonite, two-tone carbonite and silver (EMEA only)
<b>VESA Mounting</b>	Yes (swing arm/wall mount not included); base must be removed for mounting options)
<b>VESA External Mounting</b>	Yes (standard 4 hole pattern, 100 mm)
<b>Kensington Lock-ready</b>	Yes
<b>Certification and Compliance</b>	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification
<b>Compatibility</b>	VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP LP1965 Flat Panel Monitor. Recommended for use with HP products.
<b>Service and Warranty</b>	Three years parts, labour, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

HP Flat Panel Monitor Panel  
LP2065

<b>Type</b>	20-inch Active Matrix TFT (thin film transistor)
<b>Viewable Image Area (diagonal)</b>	20.1 inches; 51 cm
<b>Screen Opening (W x H)</b>	16.2 x 12.17 inches; 41.1 x 30.9 cm
<b>Viewing Angle (typical)*</b>	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)
<b>Brightness (typical)*</b>	Up to 300 nits (cd/m <sup>2</sup> )



## Technical Specifications - Monitors

	<b>Contrast Ratio (typical)*</b>	Up to 800:1
	<b>Response Rate (typical)*</b>	8 ms (gray to gray), 16 ms (rise + fall)
	<b>Pixel Pitch</b>	0.255 mm
	<b>Backlight Lamp Life (to half brightness)</b>	45K hours
<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	Input select, auto adjust/OSD up, OSD down, OSD menu select, power
	<b>Languages</b>	English, French, German, Spanish, Italian, Dutch, and Japanese
	<b>User Controls</b>	Brightness, contrast, positioning, colour temperature, individual colour control, serial number display, full screen resolutions, clock, clock phase, input selection, image control (including scaling), and factory reset
<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	<b>Vertical Frequency</b>	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	<b>Native Resolution</b>	1600 x 1200 @ 60 Hz (recommended)
	<b>Preset VESA Graphic Modes (non-interlaced)</b>	1600 x 1200 @ 60 Hz, 75 Hz (VGA input) 1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz 1280 x 960 @ 60 Hz 1152 x 900 @ 66 Hz 1024 x 768 @ 60 Hz, 75 Hz, 85 Hz 800 x 600 @ 60 Hz, 85 Hz 640 x 480 @ 60 Hz, 75 Hz, 85 Hz
	<b>Text Mode</b>	720 x 400 @ 70 Hz
	<b>Mac Mode</b>	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	<b>Sun Mode</b>	1152 x 900 @ 66 Hz
	<b>Maximum Pixel Clock Speed</b>	202 MHz (VGA input); 162 MHz (DVI input)
	<b>User Programmable Modes</b>	Yes, 10
	<b>Anti-Glare</b>	Yes
	<b>Anti-Static</b>	Yes
	<b>Default Colour Temperature</b>	6500 K
<b>Video Input</b>	<b>Plug and Play</b>	Yes
	<b>Input Signal</b>	Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video
	<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (cable included)

### Technical Specifications - Monitors

	<b>Input Signal</b>	Two DVI-I connectors (dual VGA analog or dual digital input possible)						
	<b>Input Impedance</b>	75 ohms $\pm$ 10%						
	<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green						
	<b>Video Cable</b>	Two VGA to DVI-I; two DVI-D to DVI-I						
	<b>Video Cable Length</b>	5.9 ft (1.8 m)						
<b>Power</b>	<b>Input Power</b>	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz						
	<b>Frequency</b>	47.5 to 63 Hz						
	<b>Typical Power Consumption</b>	55 watts (without USB ports); 70 watts (USB ports fully loaded)						
	<b>Maximum</b>	< 75 W						
	<b>Power Saving</b>	< 2 watts						
	<b>Power Cable Length</b>	5.9 ft (1.8 m)						
<b>Mechanical</b>	<b>Dimensions (H x W x D)</b>	<table border="0"> <tbody> <tr> <td><b>Unpacked with stand</b></td> <td>16.7 to 21.8 x 17.4 x 8.67 in 42.5 to 55.5 x 44.3 x 22.0 cm</td> </tr> <tr> <td><b>Unpacked w/o stand (head only)</b></td> <td>13.58 x 17.4 x 3.42 in 34.5 x 44.3 x 8.7 cm</td> </tr> <tr> <td><b>Packaged</b></td> <td>11.77 x 22.2 x 16.77 in 29.9 x 56.4 x 42.6 cm</td> </tr> </tbody> </table>	<b>Unpacked with stand</b>	16.7 to 21.8 x 17.4 x 8.67 in 42.5 to 55.5 x 44.3 x 22.0 cm	<b>Unpacked w/o stand (head only)</b>	13.58 x 17.4 x 3.42 in 34.5 x 44.3 x 8.7 cm	<b>Packaged</b>	11.77 x 22.2 x 16.77 in 29.9 x 56.4 x 42.6 cm
<b>Unpacked with stand</b>	16.7 to 21.8 x 17.4 x 8.67 in 42.5 to 55.5 x 44.3 x 22.0 cm							
<b>Unpacked w/o stand (head only)</b>	13.58 x 17.4 x 3.42 in 34.5 x 44.3 x 8.7 cm							
<b>Packaged</b>	11.77 x 22.2 x 16.77 in 29.9 x 56.4 x 42.6 cm							
	<b>Weight</b>	<table border="0"> <tbody> <tr> <td><b>Unpacked</b></td> <td>With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)</td> </tr> <tr> <td><b>Packaged</b></td> <td>26.3 lb (11.95 kg)</td> </tr> </tbody> </table>	<b>Unpacked</b>	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)	<b>Packaged</b>	26.3 lb (11.95 kg)		
<b>Unpacked</b>	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)							
<b>Packaged</b>	26.3 lb (11.95 kg)							
	<b>Tilt Range</b>	-5° to + 25° vertical tilt						
	<b>Swivel Range</b>	-45° to + 45°						
	<b>Height Adjustable</b>	Yes, range 5.1 inches; 13.0 cm						
	<b>Pivot Rotation</b>	Yes						
	<b>Base</b>	Detachable, ships attached						
<b>Environmental</b>	<b>Temperature – Operating</b>	46° to 95° F (10° to 35° C)						
	<b>Temperature – Non-operating</b>	6° to 140° F (-10° to 60° C)						
	<b>Humidity – Operating</b>	20% to 80% non-condensing						
	<b>Humidity – Non-operating</b>	5% to 85%						
	<b>Altitude – Operating</b>	+12,000 ft (+3,657.6 m)						
	<b>Altitude – Non-operating</b>	+40,000 ft (+12,192 m)						
<b>Options</b>	<b>HP Silver Flat Panel Speaker Bar - Part number: EE418AA</b>	Powered directly by the monitor or the PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select						

### Technical Specifications - Monitors

<b>Other</b>	<b>Accessories Included</b>	<p>HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Silver Flat Panel Speaker Bar QuickSpec.</p> <p>VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #1 or 2 (DVI-I analog) connector.</p> <p>DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #1 or #2 (DVI-I digital) connector.</p>
	<b>User Guide Languages</b>	<p>English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish</p>
	<b>Software</b>	<p>HP Display Assistant Utility makes it possible to adjust displays settings through the PC using two-way communication via DDCI.</p> <p>HP Display Lite Saver allows ability to power up and down display at predetermined hours of the day to save power and backlight life.</p> <p>Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.</p>
	<b>User Guide Languages</b>	English
	<b>Warranty Languages</b>	English
	<b>Colour</b>	Carbonite/Silver
	<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-Ready</b>	Yes
<b>Certification and Compliance</b>		<p>Canadian Requirements/CSA, CE Marking, CISPR Requirements, , Energy Star Compliant, FCC Approval, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval,, MPR-II Compliant, PC2001 Compliant, PC99 Certified, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)</p>
<b>Compatibility</b>		<p>Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.</p>

### Technical Specifications - Monitors

<b>Service and Warranty</b>	Three years parts, labour, and on-site service. 24-hour 365-day 1-800 technical support. Replacement options include 2nd business day on-site service or next business day direct replacement. With direct replacement, HP will ship a replacement display product directly to you. Using the shipping labels provided, return your failed display to HP. Certain restrictions and exclusions apply. For details, contact HP Customer Support.
-----------------------------	--

<b>HP Flat Panel Monitor LP2465</b>	<b>Panel</b>	<b>Type</b>	24-inch Active Matrix TFT (thin film transistor)
		<b>Viewable Image Area</b> (diagonal)	24 inches; 60.96 cm
		<b>Screen Opening</b> (W x H)	20.47 x 12.83 inches; 52.0 x 32.6 cm
		<b>Viewing Angle</b> (typical)*	178° H/ 178° V (10:1 minimum contrast ratio)
		<b>Brightness</b> (typical)*	500 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio</b> (typical)*	1000:1
		<b>Response Rate</b> (typical)*	8 ms (typical gray to gray)
		<b>Pixel Pitch</b>	0.270 mm
		<b>Backlight Lamp Life</b> (to half brightness)	50K hours
		<i>*Response time 13 ms rise and fall, 6 ms gray to gray.</i>	
<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power	
	<b>Languages</b>	English, French, German, Spanish, Italian, Japanese, Dutch	
	<b>User Controls</b>	Brightness, contrast, positioning, colour temperature, individual colour control, serial number display, full screen resolutions, clock, clock phase, input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	
<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	<b>Vertical Frequency</b>	48 to 85 Hz (VGA and DVI input)	
	<b>Native Resolution</b>	1920 x 1200 @ 60 Hz (recommended) (native aspect ratio of 16:10)	
	<b>Preset VESA Graphic Modes</b> (non-interlaced)	1920 x 1200 @ 60 Hz	
		1600 x 1200 @ 60 Hz, 75 Hz	
		1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz	
		1280 x 960 @ 60 Hz	
	1152 x 900 @ 66 Hz		
	1024 x 768 @ 60 Hz, 75 Hz, 85 Hz		
	800 x 600 @ 60 Hz, 75 Hz		
	640 x 480 @ 60 Hz, 75 Hz		
	<b>Text Mode</b>	720 x 400 @ 70 Hz	
	<b>Mac Mode</b>	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz	

## Technical Specifications - Monitors

	Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)
	User Programmable Modes	Yes, 20
	Anti-Glare	Yes
	Anti-Static	Yes
	Default Colour Temperature	6500 K
Video/Other Inputs	Plug and Play	Yes
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (located on side of monitor, cable included)
	Input Signal	Two DVI-I (VGA analog and digital) inputs
	Input Impedance	75 ohms $\pm$ 10%
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green
	Video Cable	VGA to DVI-I; DVI-D to DVI-D
	Video Cable Length	5.9 ft (1.8 m)
Power	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz
	Frequency	47.5 to 63 Hz
	Typical Power Consumption	75 watts
	Maximum	< 110 watts
	Power Saving	< 2 watts
	Power Cable Length	6.2 ft (1.9 m)
Mechanical	Dimensions (H x W x D)	<b>Unpacked w/ stand</b> 14.6 (min) to 19.7 (max) x 22 x 9.1 in (37.1 (min) to 50.1 (max) x 55.4 x 23.2 cm
		<b>Unpacked w/o stand (head only)</b> 14.4 x 22 x 3.7 in 36.6 x 55.84 x 9.2 cm
		<b>Packaged</b> 11.7 x 22.1 x 25.6 in 29.8 x 56.0 x 65.1 cm
	Weight	<b>Unpacked</b> 23.6 lbs (10.7 kg) <b>Packaged</b> 23.6 lbs (10.7 kg)
	Tilt Range	-5° to + 25° vertical
	Swivel Range	-45° to + 45°
	Height Adjustable	Yes, range 5.1 inches; 130 mm
	Pivot Rotation	Yes
	Base	Detachable, ships detached
Environmental	Temperature – Operating	46° to 95° F (10° to 35° C)

## Technical Specifications - Monitors

	<b>Temperature – Non-operating</b>	6° to 140° F (-10° to 60° C)
	<b>Humidity – Operating</b>	20% to 80% non-condensing
	<b>Humidity – Non-operating</b>	5% to 85%
	<b>Altitude – Operating</b>	+12,000 ft (+3,657.6 m)
	<b>Altitude – Non-operating</b>	+40,000 ft (+12,192 m)
<b>Other</b>	<b>Accessories Included</b>	VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-D cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
	<b>Software</b>	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese. HP Display Assistant is a software utility that allows monitor adjustment, colour calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected desktop PC. HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	<b>User Guide Languages</b>	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	<b>Warranty Languages</b>	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	<b>Colour</b>	Carbonite/silver
	<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-Ready</b>	Yes
<b>Options</b>	<b>HP Silver Flat Panel Speaker Bar - Part number: EE418AA</b>	Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select



### Technical Specifications - Monitors

HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.

<b>Certification and Compliance</b>	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)
<b>Compatibility</b>	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
<b>Service and Warranty</b>	Three years parts, labour, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

<b>HP LP3065 Flat Panel Monitor</b>	<b>Panel</b>	<b>Type</b>	30.0-inch Wide Format Active Matrix TFT (thin film transistor)
		<b>Viewable Image Area (diagonal)</b>	29.77 in (75.623 cm)
		<b>Screen Opening (W x H)</b>	25.3 x 15.8 in (64.3 x 40.3 cm)
		<b>Viewing Angle (typical)*</b>	Up to 178° H/ 178° V (10:1 minimum contrast ratio)
		<b>Brightness (typical)*</b>	300 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio (typical)*</b>	1000:1
		<b>Response Rate (typical)*</b>	12 ms (8 ms average gray to gray)
		<b>Pixel Pitch</b>	0.250 mm
		<b>Backlight Lamp Life (to half brightness)</b>	40K hours
		<b>Colour Gamut</b>	92% of NTSC
	<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	Input select, brightness up, brightness down, power
		<b>User Controls</b>	Brightness, input selection
	<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	100 KHz
	<b>Vertical Frequency</b>	60 Hz	

## Technical Specifications - Monitors

	<b>Native Resolution</b>	2560 x 1600 @ 60 Hz (native aspect ratio of 16:10)
	<b>Pixel Clock Speed</b>	275 MHz
	<b>Anti-Glare</b>	Yes
	<b>Anti-Static</b>	Yes
	<b>Default Colour Temperature</b>	6500 K
<b>Video/Other Inputs</b>	<b>Plug and Play</b>	Yes
	<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (located on side of monitor, cable included)
	<b>Input Signal</b>	Three dual-link DVI-D inputs (Windows PC and graphics card that supports DVI ports with dual-link digital bandwidth and VESA DDC standard for plug-and-play setup requires a DVI-D dual-link graphic card that supports WQXGA (2560 x 1600) resolution.)
	<b>Video Cable</b>	Two dual-link DVI cables
	<b>Video Cable Length</b>	5.9 ft (1.8 m)
<b>Power</b>	<b>Input Power</b>	Auto-Ranging, 100 to 240 VAC; internal power supply, 50 Hz/60 Hz
	<b>Typical Power Consumption</b>	118 watts
	<b>Maximum</b>	< 176 watts
	<b>Power Saving</b>	< 2 watts
	<b>Power Cable Length</b>	5.9 ft (1.8 m)
<b>Mechanical</b>	<b>Dimensions (H x W x D)</b>	<b>Unpacked w/ stand</b> 19.3 to 23.2 x 27.2 x 9.5in (49.0 to 59.0 x 69.2 x 24.0 cm)
		<b>Unpacked w/o stand (head only)</b> 17.9 x 27.2 x 3.3 in (45.5 x 69.2 x 8.4 cm)
		<b>Packaged</b> 22.4 x 31.1 x 14.9 in (56.8 x 79.0 x 37.8 cm)
	<b>Weight</b>	<b>Unpacked</b> 30.6 lbs (13.9 kg)
	<b>Tilt Range</b>	-5° to + 30° vertical
	<b>Swivel Range</b>	-45° to + 45°
	<b>Height Adjustable</b>	Yes, range 5.1 in (100 mm)
	<b>Pivot Rotation</b>	No
	<b>Base</b>	Detachable, ships detached
<b>Environmental</b>	<b>Temperature – Operating</b>	46° to 95° F (10° to 35° C)
	<b>Temperature – Non-operating</b>	6° to 140° F (-10° to 60° C)
	<b>Humidity – Operating</b>	20% to 80% non-condensing

## Technical Specifications - Monitors

	Humidity – Non-operating	5% to 85%		
	Altitude – Operating	+12,000 ft		
	Altitude – Non-operating	+40,000 ft		
Environmental Data	Eco-Label Certifications and Declarations	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>● US Federal Energy Management Program (FEMP)</li> <li>● IT Eco Declaration</li> <li>● TCO 03</li> <li>● Taiwan Green Mark</li> <li>● CECP</li> <li>● Korea Eco-label</li> <li>● EPEAT - Silver</li> </ul>		
	Energy Consumption (in accordance with US Energy Star test method)	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
	Normal Operation	102.8 watts	101.7 watts	100.4watts
	Sleep <sup>1</sup>	2 watts	2 watts	2 watts
	Off	0.05 watts	0.06 watts	0.25 watts
	Heat Dissipation <sup>2</sup>	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
	Normal Operation	350.8 BTU/hr	347.0 BTU/hr	342.6 BTU/hr
	Sleep	6.8 BTU/hr	6.8 BTU/hr	6.8 BTU/hr
	Off	0.2 BTU/hr	0.2 BTU/hr	0.9 BTU/hr
	<b>NOTES</b>			
	<sup>1</sup> This sleep status ignore the input sync signal check cycle when metering the model in sleep mode.			
	<sup>2</sup> Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.			
	Longevity and Upgrading	<p>Upgradeability features contained in the product include:</p> <p>One upstream and four downstream USB ports</p>		
	Ergonomics	<p>The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays.</p>		
	Additional Information	<p>This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive, 2002/95/EC.</p>		

This HP product is designed to comply with the

Waste Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the SILVER level, see [www.epeat.net](http://www.epeat.net).

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Display meets the requirement for low frequency electromagnetic fields per MPR-II, TCO, and prEN50279 A/B/C.

This product contains 0% recycled materials (by wt.)

This product is 97.6% recycleable when properly disposed of at end of life.

#### Packaging Materials

- Corrugated Paper 2.19 kg
- PE-LD Bags 0.09 kg
- EPS Molded Foam 1.07 kg

#### RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

[http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium

- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

## Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

## End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

## Hewlett-Packard Corporate Environmental

For more information about HP's commitment to the environment:

### Technical Specifications - Monitors

	<b>Information</b>	Global Citizenship Report <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a> Eco-label certifications <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html">http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html</a> ISO 14001 certificates: <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html">http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</a>
<b>Other</b>	<b>Accessories Included</b>	Two dual link DVI-D to DVI-D cables - connects the graphic card's DVI-D digital connector to the monitor's input (DVI-D digital) connectors; power cord
	<b>Software</b>	HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	<b>User Guide Languages</b>	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	<b>Warranty Languages</b>	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	<b>Colour</b>	Carbonite
<b>Options</b>	<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-Ready</b>	Yes
	<b>HP Flat Panel Speaker Bar - Part number: EE418AA</b>	Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.
<b>Certification and Compliance</b>	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals.	
<b>Compatibility</b>	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.	
<b>Service and Warranty</b>	Three years parts, labour, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-	

## Technical Specifications - Monitors

site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

---

© Copyright 2008 Hewlett-Packard Development Company, L.P.

All rights reserved. HP and the HP logo are trademarks of the Hewlett Packard Company in the U.S. and/or other countries.

All rights reserved. Microsoft, Windows, Windows Vista, and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. NVIDIA and Quadro are trademarks of NVIDIA Corporation. All other product names mentioned herein may be trademarks of their respective companies.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>