



Overview

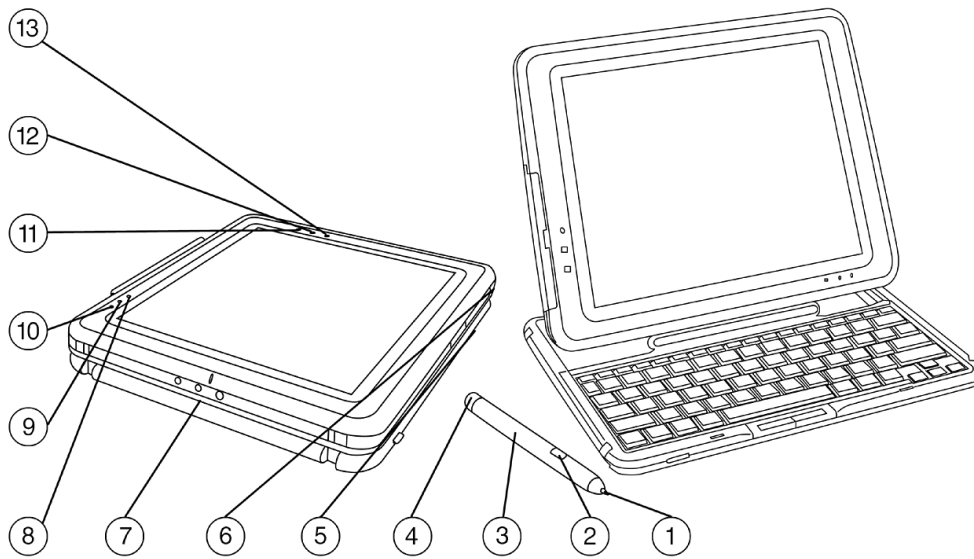


- | | |
|-------------------------------|--|
| 1. Pen Tip | 8. AC Adapter Light |
| 2. Pen Button | 9. Battery Light |
| 3. Pen Barrel | 10. Wireless LAN/Bluetooth™ Activity Light |
| 4. Pen Tether Eyelet | 11. Tablet PC Input Panel Launch |
| 5. Battery Bay | 12. Journal Launch Button |
| 6. Power Switch | 13. Rotate Button |
| 7. Mobile Keyboard (attached) | |

Front View

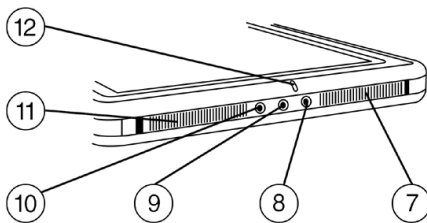


Right View

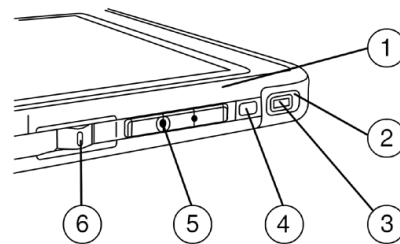

- | | |
|---|----------------------|
| 1. Integrated Antenna | 7. Speaker (1 of 2) |
| 2. Power Switch | 8. Microphone Jack |
| 3. Power/Standby Light | 9. Headset Jack |
| 4. Display Toggle (F4) Button | 10. Audio-out Jack |
| 5. Windows Security Button (CTRL+ALT+DEL) | 11. Speaker (1 of 2) |
| 6. Jog Dial | 12. Microphone |

Overview

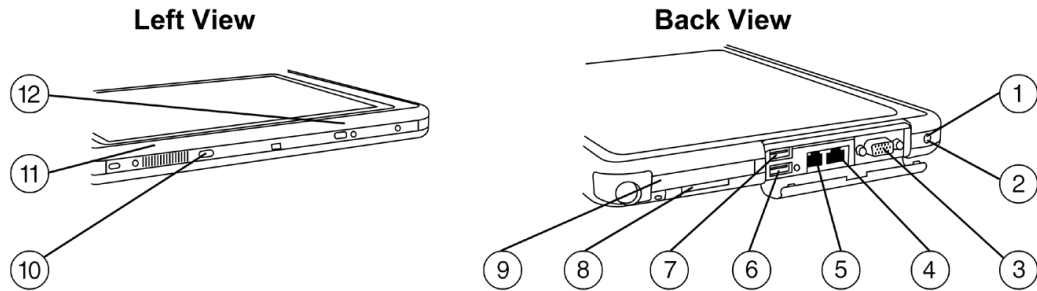

- | | |
|--|---|
| 1. AC Power Connector | 7. USB 2.0 Connector |
| 2. Integrated IR | 8. Secure Digital (SD) Slot |
| 3. External Monitor Connector | 9. PC Card Slot |
| 4. RJ-45 Network Jack | 10. Keyboard Connector |
| 5. RJ-11 Telephone Jack | 11. Antenna (not visible from outside of tablet PC) |
| 6. External Multibay Connector (USB 2.0) | 12. Integrated Bluetooth |

At A Glance

- Award-winning design
- Microsoft Windows XP Tablet PC Edition
- Intel® Pentium® M and Celeron® M Ultra Low Voltage processors
- Intel 855PM Chipset with rich graphics from NVIDIA – GeForce 4 Go 420 32MB (4X AGP)
- Durable magnesium casing
- Weighs 3.1 lb(1.4 kg) – with keyboard 4.0 lb(1.8 kg)
- Approximately 0.8 in(2.0 cm) thin
- 10.4-inch XGA TFT display with sparkle-free glass
- Starting with 256 MB or 512 MB of SDRAM upgradeable to 2 GB
- Storage available ranging from 30 GB to 80 GB
- Integrated mini PCI 56K modem plus 10/100 NIC
- Type III Mini PCI integrated WLAN - 802.11b WLAN, 802.11b/g WLAN, and 802.11a/b/g WLAN options
- Integrated Bluetooth™ on select models
- Dedicated Secure Digital (SD) slot for removable media
- Integrated IR
- Battery-free, pressure sensitive pen for the ultimate writing experience (application must support pressure sensitivity)
- Additional HP Security Lock Slot

What's Special

- Flexible design with great performance!
- Ultra-light weight and portable
- Warm swap battery support
- Innovative keyboard attachment
- Docking with or without keyboard
- Easy transitions with multi-monitor docking profiles
- Magnesium alloy case and high quality digital pen with tether

Standard Features

Processor and Chipset	<p>Intel Pentium M 733* (Ultra Low Voltage 1.1-GHz processor, 2-MB cache and 400-MHz Front Side Bus)</p> <p>Intel Pentium M 713* (Ultra Low Voltage 1.1-GHz processor , 1-MB cache, 400-MHz Front Side Bus)</p> <p>Intel Pentium M Ultra Low Voltage 1.0-GHz processor with 1-MB cache and 400-MHz Front Side Bus</p> <p>Intel Celeron M 353* (Ultra Low Voltage 900-MHz speed, 512-KB cache, 400-MHz front side bus)</p> <p>Intel 855PM chipset</p> <p>NOTE: Not available in all regions.</p> <p>*NOTE: Intel's numbering is not a measurement of higher performance.</p>
Operating System	<p>Pre-installed Microsoft Windows XP Tablet PC Edition</p>
Display	<p>Internal 10.4-inch colour TFT XGA with 1024 x 768 resolution (up to 16.7M colours internal)</p> <p>NOTE: All products have at least 100 degree wide viewing angle. Pentium M SKU DQ871A#ABA available with 160 degree viewing angle.</p> <p>External Up to 32-bit per pixel colour depth</p> <p>Supports 640 x 480, 800 x 600, 1024 x 768, 1280 x 768, 1280 x 1024, or 1600 x 1200 resolutions up to 100-Hz refresh rate, dependent upon monitor capability, and resolution and colour depth settings</p>
Memory	<p>Standard 256- or 512-MB (333-MHz) SDRAM on select models</p> <p>Maximum 2-GB (333-MHz) SDRAM</p> <p>NOTE: Memory is upgradeable to 2 GB with 1 GB (333-MHz) DRAM in each memory slot. One memory slot is available for user configuration. The other slot is factory configured or can be upgraded through an HP authorized service provider.</p> <p>NOTE: Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility.</p>
Graphics	<p>NVIDIA GeForce 4 Go 420 with 32MB (4X APG)</p>
Audio	<p>16-bit stereo sound</p> <p>2 stereo speakers</p> <p>Headphone out, microphone jack, and headset jack</p>
Communications	<p>Type III Mini PCI integrated WLAN - 802.11b WLAN, 802.11b/g WLAN, and 802.11a/b/g WLAN options</p> <p>Internal MDC 56K high speed modem</p> <p>Internal 10/100 NIC</p> <p>Integrated Bluetooth (on select models)</p> <p>NOTE: Designed only to allow faster downloads from high speed compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions.</p> <p>NOTE: Communication availability is subject to country regulatory approval.</p>
Command Controls Buttons	<p>The tablet PC comes with Command Control Buttons designed to increase customer productivity by providing one-touch access to rotate screen, favorite Internet destinations, files, or applications.</p> <ul style="list-style-type: none"> ● 3 programmable pen activated buttons (on top front panel) ● 3 programmable side buttons (Qmenu, Esc, and Tab commands) ● 2 additional specific function buttons (Windows security (Ctrl+Alt+Del) and Display toggle)

Standard Features

Keyboard 95% of full-sized 101-key compatible keyboard with isolated, inverted-T cursor control keys, and right-control key
NOTE: A USB Keyboard is required to unbundle software and edit BIOS settings and may be required to install software.

Pointing Device Battery-free digital pen with tether (one-year warranty)
 Detachable keyboard with pointstick
NOTE: Handwriting recognition software is available in Microsoft Windows XP Tablet PC Edition.

PC Card Slots One Type II PC Card Slot that supports both 32-bit CardBus and 16-bit PCMCIA Cards

Removable Media One Secured Digital (SD) slot

Storage Internal Hard Drive 40-GB (4200 rpm) or 40-GB, 60-GB, 80-GB (5400 rpm) SMART Hard Drives
NOTE: External MultiBay or Tablet PC Docking Station required for MultiBay drives.

Multimedia Integrated 16-bit Sound Blaster Pro-compatible stereo audio
 2 Integrated stereo speakers and microphone
 Stereo Headphone-out
 Mono Headphone-out/Microphone in
 Software MPEG1 support
 DVD movie playback software available with

- DVD-ROM Drive with DVD movie playback
- DVD/CD-RW Combo Drive
- DVD+RW Drive

NOTE: Voice recognition software available in Microsoft Windows XP Tablet PC Edition. An external boom microphone is recommended for voice recognition.

Interfaces

PC Card Slot	1, Type II
Secured Digital (SD) Slot	1 removable media (not SDIO)
External Monitor/Projector	1 Analog VGA
Stereo Headphone	1, 3.5 mm stereo headphone jack
Mono Headphone/ Microphone	1, 2.5 mm headset jack
Stereo Microphone in	1, 3.5 mm microphone jack
Modem	1 RJ-11
NIC	1 RJ-45
USB 2.0 Port	2, 1 with support for External MultiBay
LED Status Indicators	3 (Power connection, battery charge, and wireless active)
AC Power	1
Fast Infra-red (VFIR)	1

Standard Features

Security

Setup Password with pen support
 Power-On Password with pen support
 DriveLock – requires password to access hard drive
 Enabled by PC Card options
 BIOS WLAN lock – prevents the replacement with unauthorized WLAN cards
 2 HP Security locks – physically secure unit while in tablet, docking, or notebook modes

Software

Pre-installed Software

HP Mobile Printing for Notebooks
 HP Help and Support (XP Only)
 Safety and Comfort Guide
 Adobe Acrobat® Reader v. 5.1.0
 Microsoft Reader v. 2.5
 Zinio Reader v.1.4
 Sun Java 1.4
 Windows Media Player 9 for XP
 HP Tablet PC Tour
 Intervideo WinDVD Playback Software v. 4 (Pre-loaded)

Recommended software/services

Availability of recommended software applications or services may vary by region and may require additional purchase and/or subscription
 FranklinCovey TabletPlanner v. 2.0 (30 day trial period)
 MindJet MindManager 2002 for Tablet PC (21 day trial period)
 Corel Grafigo v. 1.0 (promotional free download)
 Zinio (see Digital Magazine icon on Tablet PC desktop for more information)
 ScanSoft OmniForm Filler 5.1 and Dragon Naturally Speaking Standard Edition 7.1 (available as a special configuration)

Additional software available through the web

HP Client Manager Software
 HP ProtectTools Smart Card Security Manager
 QuickLook for the HP Tablet PC TC1100 series

***NOTE:** Software is loaded on the hard drive and must be installed by running the Software Setup utility.

System Recovery

Each unit is shipped with a recovery CD kit containing Operating System Recovery and Driver/Application Recovery CDs. These CDs allow users to either recover or repair the tablet's operating system and select drivers without losing personal data. The Operating System CD also provides the option of reinstalling the operating system software provided with the tablet.

Power Supply

65W External AC Adapter

Battery

40W/Hr internal main rechargeable Lithium-Ion battery (one-year warranty)

Bridge battery – Allows user to swap main battery with the system in standby mode

The HP Compaq Tablet PC TC1100 6-cell primary Lithium-Ion battery provides up to 4.5 hours of battery life.

NOTE: Actual results may vary with product model, configuration, and individual usage. Hewlett-Packard testing of a HP Compaq TC1100 with an Intel Pentium M processor 733 1.1 GHz CPU, Windows XP Tablet Edition, 10.4-inch XGA LCD, 512-MB RAM, 40-GB HDD, 6-cell Lithium-Ion battery, and NIC/modem, achieved an overall Business Winstone® 2002 BatteryMark score of 4h 38m Business Winstone 2002 BatteryMark Version 1.0 units. Winstone® is a registered trademark and BatteryMark™ is a trademark of Ziff Davis Publishing Holdings Inc. in the U.S. and other countries. Copyright 2002 Ziff Davis Media Inc. All Rights Reserved. System parameters followed test recommendations: panel brightness 50%, power management scheme – Laptop/Portable, hard drive, standby and video timers set to never, not external devices connected and all wireless turned off.

Battery Re-Charge Time	System in OFF mode or Standby	3 hours
	System ON (depending on system power consumption)	3-5 hours

Standard Features

Power Conservation Instant-on via Standby
Hibernation
ACPI compliant

MultiBay Devices Under Microsoft Windows XP Tablet PC Edition, MultiBay devices may be hot swapped. Writeable drives should only be swapped with power off. The Common MultiBay devices are compatible across TC1000 and TC1100 tablets, and multiple (with optional External MultiBay or Docking Station)

Wireless Devices The HP tablet TC1100 supports a range of secure, integrated wireless LAN options featuring support for the latest industry standards. Integrated Bluetooth is also an option and can be combined with any one of the supported wireless LAN options.


All integrated wireless LAN options	Wi-Fi certified Cisco Compatible Extensions support Wired Equivalent Privacy (WEP) support up to 128bit keys Wi-Fi Protected Access (WPA) support 802.1x standards support including EAP-TLS, Protected EAP (PEAP) and Cisco-EAP (LEAP) Dual antennas integrated in the display enclosure
HP W500 802.11a/b/g	Integrated support for 802.11a, b and g Up to 54mbps throughput performance Advanced Encryption Standard (AES) support
Intel PRO/Wireless 2200BG 802.11b/g wireless LAN	Intel® Centrino™ mobile technology Integrated support for 802.11b, g Up to 54mbps throughput performance
Intel PRO/Wireless 2100 802.11b wireless LAN	Intel® Centrino™ mobile technology Integrated support for 802.11b Up to 11mbps throughput performance
Integrated Bluetooth	Designed to the Bluetooth v1.1 specification

Docking The HP Tablet PC Docking Station provides simple and convenient port management MultiBay drives. Features include NIC pass through, four USB 2.0 including 1 Powered External USB MultiBay connector, VGA, line in/line out, and MultiBay slot. The docking solutions are compatible across TC1000 and TC1100 tablets enabling a lower total cost of ownership.

Service and Support HP Services includes a One-Year or Three-year, Worldwide Limited Warranty, pick-up or carry-in (in select countries) and toll-free 7 x 24 hardware technical phone support.
NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Centre for details at 1-888-882-6672.

Standard Features

The Etymology of a Model name:

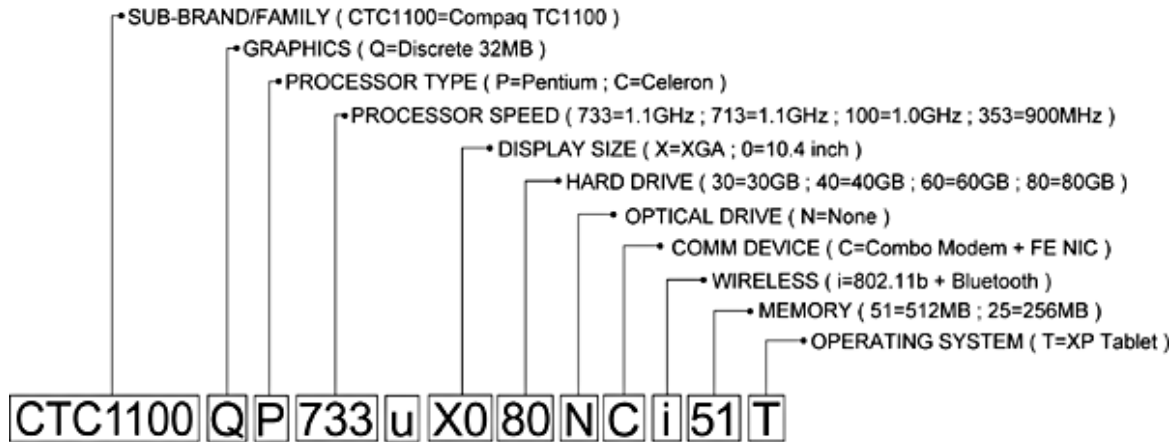

Model

CTC1100QP100X040NCi51T
DQ871A#ABA (English)
DQ871A#ABC (Fr Canada)



CPU	Ultra-Low Voltage Intel Pentium M 1.0GHz with 400MHz Front Side Bus and 1MB cache
Operating System	Microsoft Windows XP Tablet PC Edition
Display	10.4-inch colour TFT XGA with 1024 x 768 resolution (160 degree viewing angle)
Memory	Standard 512MB 333-MHz DDR SDRAM with one open slot Maximum 2GB, 1GB 333MHz DDR SDRAM in each slot
Hard Drive	40GB
Discrete Video	NVIDIA - GeForce 4 Go 420 32MB (4X AGP)
Communications	Internal MDC 56K (V.90/high speed) modem, NIC 10/100, Intel Pro/Wireless WLAN 802.11b, Bluetooth
Input Device	Tablet PC Pen with tether, HP Tablet PC Keyboard with Pointstick
Battery	6-cell Lithium-Ion
Warranty	Three year

Smart Buy Product**

CTC1100QP100X040NCb25T
PL579UA#ABA (English)
PL579UA#ABC (Fr Canada)



CPU	Ultra-Low Voltage Intel Pentium M 1.0GHz with 400MHz Front Side Bus and 1MB cache
Operating System	Microsoft Windows XP Tablet PC Edition
Display	10.4-inch colour TFT XGA with 1024 x 768 resolution (100 degree viewing angle)
Memory	Standard 256MB 333-MHz DDR SDRAM with one open slot Maximum 2GB, 1GB 333MHz DDR SDRAM in each slot
Hard Drive	40GB
Discrete Video	NVIDIA - GeForce 4 Go 420 32MB (4X AGP)
Communications	Internal MDC 56K (V.90/high speed) modem, NIC 10/100 Intel Pro/Wireless WLAN 802.11b
Input Device	Tablet PC Pen with tether, HP Tablet PC Keyboard with Pointstick
Battery	6-cell Lithium-Ion
Warranty	One year

**specially priced product, certain restrictions apply.

Standard Features

CTC1100QP110X040WCf51T
PP834AA#ABA (English)
PP834AA#ABC (Fr Canada)



CPU	Intel Pentium M 733* (Ultra Low Voltage 1.1-GHz processor, 2-MB cache and 400-MHz Front Side Bus) *NOTE: Intel's numbering is not a measurement of higher performance.
Operating System	Microsoft Windows XP Tablet PC Edition
Display	10.4-inch colour TFT XGA with 1024 x 768 resolution (160 degree viewing angle)
Memory	Standard 512MB 333-MHz DDR SDRAM with one open slot Maximum 2GB, 1GB 333MHz DDR SDRAM in each slot
Hard Drive	40GB (5400rpm)
Discrete Video	NVIDIA - GeForce 4 Go 420 32MB (4X AGP)
Communications	Internal MDC 56K (V.90/high speed) modem, NIC 10/100, Intel Pro/Wireless WLAN 802.11b/g, Bluetooth
Input Device	Tablet PC Pen with tether, HP Tablet PC Keyboard with Pointstick
Battery	6-cell Lithium-Ion
Warranty	Three year

Options

Memory	256-MB 333-MHz RAM Memory Upgrade	DC389B
	512-MB 333-MHz RAM Memory Upgrade	DC390B
	1-GB 333-MHz RAM Memory Upgrade	DC890B
	NOTE: Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility.	
MultiBay Devices	DVD+RW/CD-RW Drive	DG189A
	24X Combo DVD/CD-RW Drive	DC364A
	8X DVD Drive	DC352A
	24X Max CD-ROM Drive	DC351A
	MultiBay Diskette Drive	DC362A
	NOTE: MultiBay devices may only be used in External MultiBay or Docking Station MultiBay.	
MultiBay Storage	40-GB MultiBay Hard Drive (4200 rpm)	263472-B25
	60-GB MultiBay Hard Drive (5400 rpm)	DC894A
	80-GB MultiBay Hard Drive (5400 rpm)	DC920A
	NOTE: MultiBay hard drive options may only be used in External MultiBay or Docking Station MultiBay.	
Expansion Bases	Tablet PC Docking Station	DC911A#ABA
	External MultiBay	DC373A#ABA
Power	Tablet PC Lithium-Ion battery pack (internal)	DC907A
Common Power Solutions	Battery Charger (single)	DF933A#ABA
	Battery Charger (multiple)	DF932A#ABA
	65W AC Adapter	DC359A#ABA
	90W Auto Adapter	DC303B
	90W Aircraft Cables	DC899A
Input Devices	Tablet PC Mobile Keyboard	PC875A#ABA
	Tablet PC Pen with tether	DG937A
	Tablet PC Pen with eraser	DM685A
	Wireless Keyboard & Mouse	DL989A#ABA
	Wireless Keyboard & Mouse (French)	DL989A#ABC
	USB/PS2 Keyboard & Mouse	DM687A#ABA
	External Enhanced III Keyboard (carbon)	DC852A#ABA
	External Enhanced III Keyboard (carbon) - French	DC852A#ABC
	USB Travel Optical Mouse	F2100A
	USB/PS2 Optical Mouse	DC369A
Security	Security Cable Lock	DC368A

Options

Communications	W500 WLAN 802.11a/b/g miniPCI Upgrade	DR469A#ABA
Removable Storage	5GB PCMCIA Hard Drive	DF928A
	USB Digital Drive with 128MB	DL702A
	SD Card Memory (128MB)	FA135A#AC3
	SD Card Memory (256MB)	FA136A#AC3
	SD Card Memory (512MB)	FA184A#AC3
Removable Storage - Floppy Drive	USB Floppy Drive	DC361B
Useful Accessories	Tablet PC Executive Slim-line Portfolio	DC912A
	Tablet PC Executive Workstation Portfolio	DC909A
Cases	HP Entry Value	DL617A
	Top Load Nylon	DC915A
	Sport Backpack	DG102A
	Executive Nylon	DC916A
	Executive Leather	DC917A
	Portable Grip	DK504A
	Rugged Case	DK503A

Memory

HP Compaq Tablet PC TC1100

Standard memory plus optional memory for the Celeron model. Not all configurations shown.

Memory		Factory or HP authorized service provider configured	User configurable
Standard	256 MB	256 MB (266 MHz)	Empty
Optional	512 MB	256 MB (266 MHz)	256 MB (333 MHz) ¹
Optional	768 MB	256 MB (266 MHz)	512 MB (333 MHz) ²
Optional	1024 MB	512 MB (333 MHz)	512 MB (333 MHz)
Optional	1536 MB	512 MB (333 MHz)	1 GB (333 MHz)
Optional maximum	2 GB	1 GB (333 MHz)	1 GB (333 MHz)

Standard memory plus optional memory for the Pentium-M model. Not all configurations shown.

Memory		Factory or HP authorized service provider configured	User configurable
Standard	512 MB	512MB (333MHz)	Empty
Optional	768 MB	512MB (333MHz)	256MB (333MHz)
Optional	1024 MB	512MB (333MHz)	512MB (333MHz)
Optional	1536 MB	512MB (333MHz)	1GB (333MHz)
Optional maximum	2 GB	1GB (333MHz)	1GB (333MHz)

¹ Memory will run at 266 MHz.

² Memory will run at 266 MHz.

Technical Specifications

System Unit	Dimensions (H x W x D)	10.4-inch TFT panel display	10.8 x 8.5 x 0.8 in (27.4 x 21.6 x 2.0 cm)
	Weight	Approximate	3.1 lb (1.4 kg) Tablet PC only 4 lb (1.8 kg) Tablet PC with keyboard
	Stand-Alone Power Requirements	Nominal Operating Voltage	14.8 VDC
		Peak Operating Power	40 W
	Temperature	Operating	50° to 95° F (10° to 35° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Relative Humidity	Operating	10% to 90% relative humidity, non-condensing
		Non-operating	5% to 90% relative humidity, 101.6° F (38.7° C) maximum wet bulb temperature
	Shock	Operating	10 G, 11 ms, half-sine
		Non-operating	60 G, 11 ms, half-sine
Vibration	Operating	0.5 G, 10 to 500 Hz, 0.5 Oct/Min sweep rate	
	Non-operating	1.0 G, 10 to 500 Hz, 0.5 Oct/Min sweep rate	
Maximum Altitude (unpressurized)	Operating	0 to 10,000 ft (3,048 m), (14.7 to 10.1 psia)	
	Non-operating	0 to 30,000 ft (9,144 m), (14.7 to 4.4 psia)	

10.4-Inch Colour TFT XGA Display	Dimensions (H x W)	9.29 x 6.82 in (23.6 x 17.3 cm)	
	Diagonal Size	10.4 in (26.41 cm)	
	Mounting	Internal Panel Supports, Flange Mounted	
	Number of Colours	Up to 16.8M	
	Contrast Ratio	150:1	
	Brightness	140 nits typical	
	Pixel Resolution	Pitch	0.264 x 0.264 mm
		Format	1024 x 768
		Configuration	RGB stripe
	Backlight	Edge Lit	
Character Display	80 x 25		
Wide Viewing Angle	100 degrees with Celeron SKUs		
	160 degrees with Pentium M SKU DQ871A#ABA		

Memory (optional)	Slot 1 (Factory and HP authorized service provider configurable only)	256-MB 266-MHz DDR	Standard with Celeron SKUs (may also use 333 MHz)
		256-MB 333-MHz DDR	
		512-MB 333-MHz DDR	Standard with Pentium SKUs
	Slot 2 (available)	1-GB 333-MHz DDR	
		256-MB 333-MHz DDR	
		512-MB 333-MHz DDR	
		1-GB 333-MHz DDR	

External AC Adapter	Weight	0.62 lb (0.28 kg)	
	Power Supply (Input)	Operating Voltage	90 to 260 VAC RMS
		Operating Current	1.7 A RMS
		Operating Frequency Range	47 to 63 Hz AC

Technical Specifications

Internal Lithium-Ion Battery Pack	Weight	0.65 lb (0.30 kg)		
	Cells	6-cell Lithium-Ion		
	Energy	Voltage	11.1 V	
		Amp-hour capacity	3.6 Ah	
		Watt-hour capacity	40 Wh	
	Temperature	Operating (Charging)	32° to 104° F (0° to 40° C)	
		Operating (Discharging)	14° to 122° F (-10° to 50° C)	
		Non-operating	-4° to 140° F (-20° to 60° C)	
	Battery Re-Charge Time	System in OFF mode or Standby	3 hours	
		System ON (depending of system power consumption)	3 to 5 hours	
Tablet PC Pen(s)	Pen with tether (standard)	Dimensions (Length)	5.1 in (130.1 mm)	
		Weight	0.66 oz (18.7 g)	
	Pen with eraser (optional)	Dimensions (Length)	5.1 in (130.1 mm)	
		Weight	0.66 oz (18.7 g)	
MultiBay DVD+RW/CD-RW Drive (optional)	MultiBay Drive	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)	
		Weight	0.55 lb (0.25 kg)	
	Center Hole Diameter	15 mm		
	Disk Diameter	12 cm/8 cm		
	Disk Thickness	1.2 mm		
	Track Pitch	0.74 μ m		
	Access Times (typical reads, including settling)	Random CD	< 175 ms	
		Full-Stroke CD	< 285 ms	
	Audio Output Level	Line-out	0.7 Vrms	
	Cache Buffer	128 KB/s (minimum)		
	Data Transfer Rate (typical, including settling)	DVD+R (2X max write)	2700 KB/s	
		DVD+RW (2X max write)	2700 KB/s	
		CD-R (16X max write)	2400 KB/s (150 KB/s at 1X CD rate)	
		CD-RW (8X max write)	1200 KB/s (150 KB/s at 1X CD rate)	
		CD-ROM (24X max read)	3600 KB/s (150 KB/s at 1X CD rate)	
DVD (8X max read)		10,800 KB/s (1352 KB/s at 1X DVD rate)		
Normal PIO Mode 4 (single burst)		16.6 MB/s		
Start-up Time	< 15 seconds			
Stop Time	< 6 seconds			

Technical Specifications

MultiBay CD-RW Drive (optional)	MultiBay Drive	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)
		Weight	0.74 lb (0.34 kg)
	Center Hole Diameter	0.59 in (1.5 cm)	
	Disk Diameter	12 cm/8 cm	
	Disk Thickness	0.047 in (1.2 mm)	
	Track Pitch	0.74 μ m	
	Access Times (typical reads, including settling)	Random	< 150 ms
		Full-Stroke	< 225 ms
	Audio Output Level	Line-out	0.7 Vrms
	Cache Buffer	128 KB/s (minimum)	
	Data Transfer Rate (typical, including settling)	Sustained (16X)	150 KB/s
		Sustained 4X CD-RW	5,520 KB/s
		Normal PIO Mode 4 (single burst)	16.6 MB/s
	Start-up Time	< 15 seconds	
Stop Time	< 6 seconds		

MultiBay DVD-ROM Drive (optional)	MultiBay Drive	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)
		Weight	0.66 lb (0.3 kg)
	Center Hole Diameter	0.59 in (1.5 cm)	
	Disk Diameter	12 cm/8 cm	
	Disk Thickness	0.43 in (1.09 cm)	
	Track Pitch	0.74 μ m	
	Access Times (typical reads, including settling)	Random (typical)	< 180 ms DVD Media
		Full-Stroke (typical)	< 300 ms DVD Media
		Random (typical)	< 120 ms CD Media
		Full-Stroke (typical)	< 200 ms CD Media
	Cache Buffer	512 KB/s (minimum)	
	Data Transfer Rate (typical, including settling)	Max 24X CD	3600 KB/s (150 KB/s at 1X CD rate)
		Max 8X DVD	10,800 KB/s (1352 KB/s at 1X DVD rate)
		Normal PIO Mode 4 (single burst)	16.6 MB/s
Start-up Time	< 12 seconds		
Stop Time	< 3 seconds		

Technical Specifications

MultiBay 24X CD-ROM Drive (optional)	MultiBay Drive	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in (1.27 x 13.25 x 12.61 cm)
		Weight	0.50 lb (0.23 kg)
	Applicable Disk	CD-ROM (Mode 1, 2 and 3), CD-XA ready (Mode 2, Form 1 and 2), CD-I ready (Mode 2, Form 1 and 2), CD-R (read only), CD Plus, Photo CD (Single and Multi-session), CD-Extra, Video CD, CD-WO (fixed packets only), CD-Bridge	
	Center Hole Diameter	0.59 in (15 mm)	
	Disk Diameter	12 cm, 8 cm	
	Disk Thickness	0.047 in (0.12 cm)	
	Track Pitch	1.6 μ m	
	Access Times (typical reads, including settling)	Random	< 150 ms
		Full-Stroke	< 300 ms
	Audio Output Level	Line-out	0.7 Vrms
	Cache Buffer	128 KB	
	Data Transfer Rate (typical, including settling)	Sustained (16X)	150 KB/s (sustained 1X)
		Variable	1500 to 3600 KB/s (10X to 24X)
		Normal PIO Mode 4 (single burst)	16.66 MB/s
	Start-up Time	< 8 seconds	
	Stop Time	< 4 seconds	

Technical Specifications

Internal MDC 56K high speed Modem (Modem Specifications)

Modem Device Driver Name

Data Mode Capabilities High speed 56K modem (a-law, mu-law)
V.8bis
V.80
V.44, V42.bis, MNP5 (Compression)
V.42 (LAPM, MNP2-4) (Error Correction)
V.34 (file date: 10/96)

Optional symbol rates:

2800, 3429
Asymmetric Symbol rates

Synchronous primary channel data signaling rates:

33600, 31200
Automatic rate re-negotiation
V.32bis
V.32
V.23
V.22bis
V.22
V.21
Bell 212A
Bell 103J

Fax Mode Capabilities

TIA-578-S (Class 1)
T.30, T.4 (Group 3)
V.17
V.29
V.27ter
V.21 Channel 2

Command Set

V.250 (Partial)
TIA-602
Identification: GMI, GMM, GMR
Port control: IPR, ICF, IFC, IIRR
Modulation: MS, MR, MA
Error control: ES, ER, EB, ESR, ETBM
Data compression: DS, DR
V.251

Power Consumption

Transfer mode: < 200 mA, maximum
Standby mode: 5 mA, nominal

Integrated 10/100 NIC

Ethernet Features

10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)
Auto-Negotiation (Automatic Speed and Duplex Selection)
HP Auto-MDIX
Full Duplex and Half Duplex operation at 10 and 100 Mbit/s
IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)

Power Management

ACPI 1.1 compliant -- multiple power modes
Situation-sensitive features reduce power consumption

Manageability

PXE 2.0 Remote Boot
Statistics Gathering (RMON, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))
Comprehensive diagnostic and configuration software suite

NIC Device Driver Name

Broadcom 440x 10/100 Integrated Controller

Drivers Available

Microsoft Windows XP, Windows 2000
DOS NDIS2 and ODI

Technical Specifications

<p>HP W500 802.11a/b/g WLAN (available as a special configuration)</p>	<p>Wireless LAN Standards</p>	<p>IEEE 802 Part 11a (802.11a) IEEE 802. Part 11b (802.11b) IEEE 802. Part 11g (802.11g)</p>						
	<p>Interoperability</p>	<p>Wi-Fi certified</p>						
	<p>Frequency Band</p>	<p>2.4 and 5 GHz</p>						
	<p>Data Rates</p>	<p>802.11a; 6,9,12,18,24,36,48,54 Mbps 802.11b; 1,2,5.5,11 Mbps 802.11g; 6,9,12,18,24,36,48,54 Mbps</p>						
	<p>Modulation</p>	<p>Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM</p>						
	<p>Security</p>	<p>64 and 128 bit WEP encryption Support for WiFi Protected Access (WPA) including TKIP, MIC Hardware-accelerated support for the Advanced Encryption Standard (AES; 256-bit encryption) Support for 802.1x authentication types: EAP-TLS, LEAP (Cisco), PEAP (Microsoft implementation) Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program).</p>						
	<p>Sub-channels</p>	<p>Multinational support with frequency bands and channels compliant to local regulations.</p>						
	<p>Media Access Protocol</p>	<p>CSMA/CA (Collision Avoidance) with ACK</p>						
	<p>Network Architecture Models</p>	<p>Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)</p>						
	<p>Roaming</p>	<p>IEEE 802.11 compliant roaming between 802.11a and 802.11b/g access points</p>						
	<p>Output Power</p>	<p>802.11b: 17 dBm (typical) 802.11a/g: 15 dBm (typical)</p>						
	<p>Power Consumption</p>	<p>Transmit: 2.0 W (max) Receive: 1.5 W (max) Sleep mode: 20 mW (max)</p>						
	<p>Power Management</p>	<p>ACPI compliant power management 802.11 Compliant Power Saving Mode Power Saving Mode selectable through the configuration utility</p>						
	<p>Receiver Sensitivity*</p>	<p>54 Mbps: -70 dBm to 1 Mbps: -90 dbm</p>						
	<p>Antenna type</p>	<p>High efficiency dual band antenna with polarization diversity, mounted in the display enclosure</p>						
	<p>Range</p>	<table border="0"> <tr> <td>802.11a - Typical</td> <td>500 feet - Outdoors Open Area 150 feet - Indoor, Office-environment</td> </tr> <tr> <td>802.11 b - Typical</td> <td>1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment</td> </tr> <tr> <td>802.11 g - Typical</td> <td>1000 feet - Outdoor Open Area 200 feet - Indoor, Office environment</td> </tr> </table>	802.11a - Typical	500 feet - Outdoors Open Area 150 feet - Indoor, Office-environment	802.11 b - Typical	1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment	802.11 g - Typical	1000 feet - Outdoor Open Area 200 feet - Indoor, Office environment
802.11a - Typical	500 feet - Outdoors Open Area 150 feet - Indoor, Office-environment							
802.11 b - Typical	1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment							
802.11 g - Typical	1000 feet - Outdoor Open Area 200 feet - Indoor, Office environment							
	<p>Form Factor</p>	<p>MiniPCI Type IIIA</p>						
	<p>Weight</p>	<p>0.036 lb (16.5 gm)</p>						
	<p>Dimensions</p>	<p>0.19 x 2.00 x 2.35 in (4.8 x 50.95 x 59.75 mm)</p>						
	<p>Operating Voltage</p>	<p>3.3v</p>						
	<p>Temperature</p>	<table border="0"> <tr> <td>Operating</td> <td>32° to 122° F (0° to 50° C)</td> </tr> <tr> <td>Non-operating</td> <td>-14° to 158° F (-10 to 70° C)</td> </tr> </table>	Operating	32° to 122° F (0° to 50° C)	Non-operating	-14° to 158° F (-10 to 70° C)		
Operating	32° to 122° F (0° to 50° C)							
Non-operating	-14° to 158° F (-10 to 70° C)							
	<p>Humidity</p>	<table border="0"> <tr> <td>Operating</td> <td>10 to 90%</td> </tr> <tr> <td>Non-operating</td> <td>5 to 95%</td> </tr> </table>	Operating	10 to 90%	Non-operating	5 to 95%		
Operating	10 to 90%							
Non-operating	5 to 95%							
	<p>Altitude</p>	<table border="0"> <tr> <td>Operating</td> <td>0 to 15,000 ft (4,572 m)</td> </tr> <tr> <td>Non-operating</td> <td>0 to 40,000 ft (12,192 m)</td> </tr> </table>	Operating	0 to 15,000 ft (4,572 m)	Non-operating	0 to 40,000 ft (12,192 m)		
Operating	0 to 15,000 ft (4,572 m)							
Non-operating	0 to 40,000 ft (12,192 m)							
	<p>Configuration Utility</p>	<p>Choice of Configuration Utility:</p> <ul style="list-style-type: none"> ● Atheros Client Utility (required for Cisco Compatible Extensions support) ● Microsoft Windows XP Wireless Zero Configuration Utility 						

NOTE: may also be compatible with certain third party software supplicants

Technical Specifications

LED Activity LED Off - WLAN and Bluetooth Radio OFF; Solid Green LED - WLAN or Bluetooth Radio ON
(please refer to your Tablet PC documentation to determine whether WLAN or Bluetooth is activated)

*Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation)

Intel Pro/Wireless 2200BG 802.11b/g WLAN	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified (details available at http://www.hp.com/go/WLAN)
	Frequency Band	2.402 - 2.494 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security	64 and 128 bit WEP encryption Support for WiFi Protected Access (WPA) including TKIP, MIC Support for 802.1x authentication types: EAP-TLS, LEAP (Cisco), PEAP (Microsoft implementation); more details available at http://www.hp.com/go/WLAN . Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program).
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points.
	Output Power	16 ±2 dBm for CCK 11 +6/-1 dBm for OFDM (power varies by data rate) Maximum output power may vary by country according to local regulations
	Power Consumption	Transmit: 1.8 Watts (max) Receive: 1.0 Watts (max) Idle mode: 75mW, nominal
	Power Management	ACPI compliant power management 802.11 Compliant Power Saving Mode
	Receiver Sensitivity*	54 Mbps: -72 dBm, 11 Mbps: -84 dBm , 1 Mbps: -94 dBm
	Antenna type	High efficiency dual band antenna with polarization diversity, mounted in the display enclosure
	Range (typical)	Outdoor 1200 feet at 1 Mbps 250 feet at 54 Mbps Indoor 300 feet at 1 Mbps 50 feet at 54 Mbps
	Form Factor	MiniPCI Type IIIB
	Weight	0.026 lb (11.75 g) max
	Dimensions	0.20 x 1.75 x 2.34 in (4.9 x 44.6 x 59.8 mm)
	Operating Voltage	3.3 V
	Temperature	Operating 32° to 158° F (0° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
	Humidity	Operating 0 to 90% (non-condensing) Non-operating 5 to 95% (non-condensing)
	Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)

Technical Specifications

Configuration Utility

Choice of Configuration Utility:

- Intel PROset for Microsoft Windows 2000 or XP (required for Cisco Compatible Extensions support)
- Microsoft Windows XP Wireless Zero Configuration Utility

NOTE: May also be compatible with certain third party software suppliers.

LED Activity

LED Off - Radio OFF; Solid LED - Radio ON

*Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

Intel Pro/Wireless 2100 802.11b WLAN

Wireless LAN Standards

IEEE 802. Part 11b (802.11b)

Interoperability

Wi-Fi certified

Frequency Band

2.4 GHz

Data Rates

802.11b; 1,2,5.5,11 Mbps

Modulation

Direct Sequence Spread Spectrum
DBPSK, DQPSK, CCK

Security

64 and 128 bit WEP encryption
Support for WiFi Protected Access (WPA) including TKIP, MIC
Support for 802.1x authentication types: EAP-TLS, LEAP (Cisco), PEAP (Microsoft implementation)
Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program).

Sub-channels

Multinational support with frequency bands and channels compliant to local regulations.

Media Access Protocol

CSMA/CA (Collision Avoidance) with ACK

Network Architecture

Ad-hoc (Peer to Peer)

Models

Infrastructure (Access Point Required)

Roaming

IEEE 802.11 compliant roaming between 802.11b access points

Output Power

16 dBm (typical)

Power Consumption

Transmit: 2.0 W (maximum)
Receive: 1.5 W (maximum)
Sleep mode: 200 mW, nominal

Power Management

ACPI compliant power management
802.11 Compliant Power Saving Mode

Receiver Sensitivity*

11 Mbps: -82 dBm to 1 Mbps: -89 dBm

Antenna type

High efficiency dual band antenna with polarization diversity, mounted in the display enclosure

Range

802.11b - Typical
1200 feet (365.85 m) - Outdoor Open Area
300 feet (91.46 m) - Indoor, Office environment

Form Factor

MiniPCI Type IIIB

Weight

0.026 lb (11.75 gm) (maximum)

Dimensions

0.20 x 1.75 x 2.34 in (4.9 x 44.6 x 59.8 mm)

Operating Voltage

3.3 V

Temperature

Operating 32° to 158° F (0° to 70° C)
Non-operating -40° to 176° F (-40° to 80° C)

Humidity

Operating 0 to 90% (non-condensing)
Non-operating 5 to 95% (non-condensing)

Altitude

Operating 0 to 10,000 ft (3,048 m)
Non-operating 0 to 50,000 ft (15,240 m)

Technical Specifications

Configuration Utility	Choice of Configuration Utility: <ul style="list-style-type: none"> ● Intel ProSet (required for Cisco Compatible Extensions support) ● Microsoft Windows XP Wireless Zero Configuration Utility <p>NOTE: May also be compatible with certain third party software supplicants.</p>
LED Activity	LED Off - Radio OFF; Solid LED - Radio ON

*Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation)

Bluetooth by HP

Form Factor	Integrated USB module
Bluetooth	1.1 Compliant
Dimensions	26 x 14 x 5.7 mm
Temperature	Operating -4° to 158° F (-20° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	10 to 90% operating 5 to 95% non operating
Altitude	Operating 15,000 ft (4572 m) Non-operating 40,000 ft (12,192 m)
Plug and Play	USB 1.1 compliant Microsoft Windows Plug and Play compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and throughput	1 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 723.2 kbps/57.6 kbps asymmetric or 433.9 kbps symmetric
Antenna type	Internally integrated within module
Range	33 ft (10 m)
Software Stack Supported	User may choose: Microsoft User Interface (Profiles supported: HID, DUN, HCRP) Widcomm User Interface (see profile support below)
Profile Support	General Access Profile Service Discovery Application Profile Serial Port Profile Generic Object Exchange Profile File Transfer Profile Synchronization Profile Dial-Up Networking Profile LAN Access Profile Object Push Profile Hard Copy Cable Replacement Profile Personal Area Networking Profile Human Interface Device Profile

Technical Specifications

Usage Models

Service Discovery (determine what Bluetooth devices are within range and support authorization)

Synchronization:

PDA's to PCs

Portable to Desktop

File Transfer:

File and directory browsing and navigation on another Bluetooth device.

File copying

Object manipulation - including add, delete, create new folders etc.

Wireless link to Corporate LAN using several Bluetooth devices sharing the same

Access Point:

Corporate email, network neighborhood, access to LAN applications, file transfer, ftp, Internet browsing, etc, using TCP/IP

Wireless link to WAN thru cell phone

Agnostic to WAN technology

Send/receive SMS messages

Wireless link to Printer

Adhoc peer to peer networking (two computers) or Personal Area Networking (PAN) using NDIS (< 7 computers)

Adhoc Bluetooth Pico-networking (point to multi-point)

Object Push - Business card or appointment exchange

Human Interface Devices

Wirelessly interface to notebook with mouse, keyboard, etc

Printing

Wirelessly print to Bluetooth enabled printers

Transmit Power

-6dBm to 4 dBm (Bluetooth Class II)

Receive Sensitivity

Better than -80 dBm at 0.1 % raw bit error rate

Link Topology

Point to Point, Multipoint Pico Nets up to 7 slaves

Security

Full support of Bluetooth Security Provisions

Network Architecture Models

Ad-hoc (Peer to Peer)

Infrastructure (Access Points Required)

Power Requirement

Peak < 270 mW

Power Management

Microsoft Windows ACPI, and USB Bus Support

Wireless EAB On/Off

Software On/Off control

Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff

Protocols Supported

TCP/IP

IPX/SPX

UDP

LED Activity

Solid Green LED - Wireless Bluetooth or WLAN On

LED Off - Wireless Bluetooth and WLAN Power Off

(please refer to your Tablet PC documentation to determine whether WLAN or Bluetooth is activated)

Certifications

All necessary regulatory approvals for countries we support including

FCC (47 CFR) Part 15C, Section 15.247 & 15.249

ETS 300 328, ETS 300 826

Low Voltage Directive IEC950

UL, CSA, and CE Mark

Technical Specifications

© Copyright 2003-2004 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. Bluetooth is a trademark owned by its proprietor and used by Hewlett-Packard Company under license. All other product names mentioned herein may be trademarks of their respective companies.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>