



eSATA II 2 Port ExpressCard

User Manual

Model P-NSA2-EC-RF

Ver. 1.0

All brand names and trademarks are properties of their
Respective owners.

Features and Benefits

- Fully compliant with ExpressCard Specification 1.0
- ExpressCard/34 Form Factor Module
- Serial ATA Generation 2 transfer rate of 300MBps
- Adds two external SATA ports
- Supports Native Command Queuing (NCQ), Non-zero offsets NCQ, and Out-of-order data delivery NCQ
- Supports Hot Plugging on external SATA port


Package Contents

- 1 x eSATA II 2-Port ExpressCard
- 1 x Driver CD
- 1 x Manual

System Requirements

- ExpressCard-enabled system with an available ExpressCard slot
- Windows® 2000, XP and Vista

Hardware Description

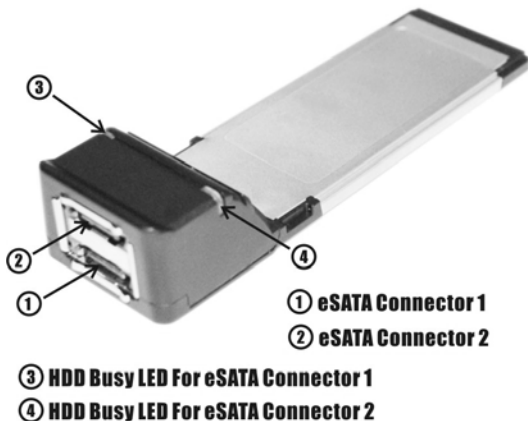

Hardware Installation

1. Insert the Card into the ExpressCard slot of your system.
2. Make sure the card is securely inserted.

Driver Installation

For Windows® XP/Server 2003

1. At the **Found New Hardware Wizard**:
XP(w/SP1 or earlier)/Server 2003: continue to step #2
XP(w/SP2 or later)/Server 2003(w/SP1 or later): select **No, not this time**, then click **Next**.
2. Please insert the provided driver CD into your CD-ROM Drive, select **Install the software automatically (Recommended)**, and click **Next**.
3. Accept the default entry, then click **Next**.
4. Click **Finish**.
5. Restart Windows to complete the installation.

For Windows® Vista

1. At the **Found New Hardware Wizard** window pop-up, please select **Locate and install driver software (recommended)** to start the installation.
2. Please insert the provided driver CD into your CD-ROM Drive.
3. Click on **Close** to complete the driver installation.
4. Restart Windows to complete the installation.

For Windows® 2000

1. At the **Found New Hardware Wizard**, click **Next**.
2. Select **Search for a suitable driver for my device (recommended)**, then click **Next**.
3. Please insert the provided driver CD into your CD-ROM Drive, check **CD-ROM drives**, uncheck the other boxes, click **Next**, then click **Next** again.
4. If the **Digital Signature Not Found** message appears, click **Yes**. Our driver has been thoroughly tested for stability and compatibility.
5. Click **Next**, then **Finish**.
6. Restart Windows to complete the installation.

To Verify Windows® Installation

1. Right click **My Computer** and click **Manage**.
2. Select **Device Manager**.
3. Double click **SCSI and RAID Controller**, then double click **Silicon Image SiI 3132 SATALink Controller** to display driver properties. A message **this device is working properly** is

displayed in the dialog box, the driver has been correctly installed.

Hot-Plugging Hard Disk Drives

To remove a drive from a powered up system, do the following:

1. Right click **My Computer** and click **Manage**.
2. Select **Device Manager**.
3. Click **Disk Drives**, right click the target disk and select **Disable/Enable**.
4. You can now remove the target disk.

1 Year Warranty

Free Technical Support: 1-800-234-4597

Aug/07

6

MN7036400002

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>