

2/4 Port SuperSpeed USB 3.0 VGA KVM Switch with Audio and Cables

SV231U3A / SV431U3A



*actual product may vary from photos

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

For the most up-to-date information, please visit: www.startech.com

Manual Revision: 03/31/2014

Download from Www.Somanuals.com. All Manuals Search And Download.

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols


This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents


Product Diagram	1
Front View - SV231U3A.....	1
Rear View.....	1
Front View - SV431U3A.....	2
Rear View.....	2
Introduction.....	3
Packaging Contents	3
System Requirements.....	3
Installation	4
Hardware Installation	4
Driver Installation.....	4
Operation	5
Front Panel.....	5
Hotkey Control.....	5
Specifications.....	7
Technical Support	8
Warranty Information.....	8

Product Diagram

Front View - SV231U3A

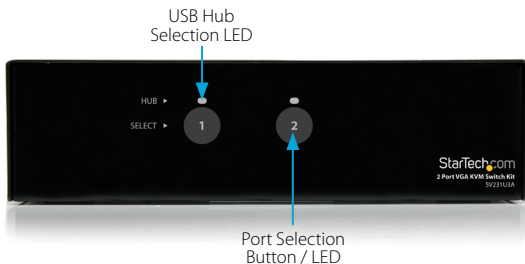

Rear View

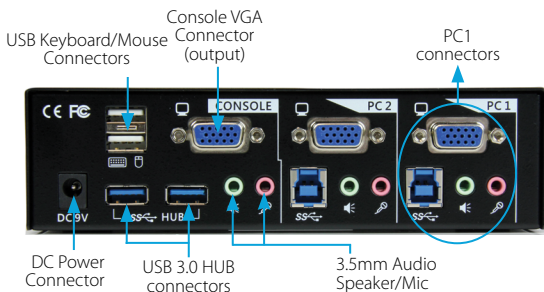

Introduction

Packaging Contents

SV231U3A

- 1 x 2 Port USB 3.0 KVM Switch
- 2 x VGA M/M Cables
- 2 x USB 3.0 A-B Cables
- 2 x 3.5mm Audio/Mic Cables
- 1 x Universal Power Adapter (NA/ UK/ EU)
- 1 x Instruction Manual

SV431U3A

- 1 x 4 Port USB 3.0 KVM Switch
- 4 x VGA M/M Cables
- 4 x USB 3.0 A-B Cables
- 4 x 3.5mm Audio/Mic Cables
- 1 x Universal Power Adapter (NA/ UK/ EU)
- 1 x Instruction Manual

System Requirements

- One VGA display device (i.e. monitor, projector, TV, etc.)
- A VGA output for each computer
- USB enabled computer system with available USB port
- Standard 104-key keyboard
- Standard 3-button mouse

Installation

Hardware Installation

1. Connect a VGA monitor into the Console's VGA connector; plug a USB keyboard and a USB mouse into the dedicated USB keyboard and mouse ports on the KVM switch. If using audio, also connect speakers with 3.5mm mini-jack plugs.
2. Use a male-to-male VGA video cable to connect the VGA connector on the computer's video card, to the VGA ports for one of the KVM's PC ports (i.e. PC1).
3. Use a USB type A-B Cable to connect the KVM's USB port (type B, square connector) for the PC port used in Step 2, and the USB port on the computer (type A, flat connector). If using audio, connect 3.5mm mini-jack cables from the PC port to the sound card.
4. Repeat Steps 2 and 3 for each PC port on the KVM switch, or each computer you wish to use on the KVM.

OPTIONAL: Connect any other USB peripherals you wish to share between the connected computers/devices to the extra USB Hub port on the Console side.

5. Connect the external power adapter from a wall outlet to the power connector on the rear panel of the KVM switch.
6. Power up the first computer/device and wait for it to fully boot and test keyboard/mouse functionality.
7. Once operation has been successfully confirmed, switch to the next port and power up that computer/device and confirm.
8. Once completed for all computers/devices connected to the KVM switch, you should be able to switch between ports freely.

Driver Installation

No driver installation is required for the KVM switch, as the keyboard/mouse use USB drivers that are already installed on any operating system that fully supports USB.

Operation

Front Panel

The front-panel Smart Touch button allows you a direct control over KVM switching operation. Simply press the button to switch to the respective PC port. For more operation about Smart Touch button, please refer to "Quick Reference Sheet".

Hotkey Control

A Hotkey command is a short keyboard sequence for selecting a computer, activating computer scan, etc. A hotkey sequence starts with two left <ScrLk> keystrokes (successively within 2 seconds) followed by one or two more keystrokes. A built-in tone generator creates a high-pitch beep for correct hotkey command; otherwise, one low-pitch beep is generated for errors and the bad key sequence will not be forwarded to the selected computer.

Please refer to the "Quick Reference Sheet" for available commands

Quick Reference Sheet

Command	Hotkeys	Front-Panel Smart Touch Button	Description
Select PC Port (Jointly select PC port/ hub port control/ audio&mic, if binding is enabled)	ScrLk + ScrLk + (1~2/1~4)	Touch the corresponding button to select the active PC port.	Select the PC port

Quick Reference Sheet

Command	Hotkeys	Front-Panel Smart Touch Button	Description
Select Audio&Mic Port (Jointly select PC port and audio&mic, if binding is enabled)	ScrLk + ScrLk + F5~F6/F5~F8	--	Move audio&mic port
Bind PC and Audio&Mic Switching	ScrLk + ScrLk + Q	--	Bind PC Port with audio&mic Port
Unbind PC and Audio&Mic Switching	ScrLk + ScrLk + W	--	Unbind PC port with audio&mic Port
Previous PC port (Jointly select PC/hub port control)	ScrLk + ScrLk + Up Arrow	--	Next lower PC Port
Next PC port (Jointly select PC/hub port control)	ScrLk + ScrLk + Down Arrow	--	Next higher PC Port

Quick Reference Sheet

Command	Hotkeys	Front-Panel Smart Touch Button	Description
Previous active PC port	ScrLk + ScrLk + [Backspace]	--	Previous active PC Port
Beeper	ScrLk + ScrLk + B	--	Toggle Beeper On/Off
Define Hotkey Preceding Sequence	ScrLk + ScrLk + H+ [ScrLk/CapsLk/ Esc/F12/ NumLk/ left Ctrl/ right Ctrl]	Press and hold down last button (Button 2/ Button 4) till two beeps. Release the button, and press desired hotkey preceding sequence.	Select Hotkey Header [ScrLk/ CapsLk/ Esc/ F12/ NumLk/ left Ctrl/ right Ctrl]
Autoscan	ScrLk + ScrLk + S	--	Start Autoscan
Autoscan with Programmable Delay Time	ScrLk + ScrLk + S + (1~6) 1 10s ; 2 20s ; 3 30s ; 4 40s ; 5 50s ; 6 60s	--	Autoscan duration adjust to (10~60 seconds)
Stop Autoscan	[Any key]	Touch any button	Stop Autoscan during scan mode

Specifications

	SV231U3A	SV431U3A
Console Connectors	1 x VGA (15 pin; High Density D-Sub) Female 2 x USB A (4 pin) Female 2 x 3.5mm Mini-Jack (3 Position) Female	
Computer Connectors (per port)	1 x VGA (15 pin; High Density D-Sub) Female 1 x USB 3.0 B (9pin; SuperSpeed) Female 2 x 3.5mm Mini-Jack (3 Position) Female	
Other Interfaces	2 x USB 3.0 A (9 pin; SuperSpeed) Female	
LEDs	2 x PC Selection Indicator 2 x Hub Selection Indicator	4 x PC Selection Indicator 4 x Hub Selection Indicator
Switching Modes	Pushbutton, Hot-key	
Maximum Resolution	2048 x 1536	
Audio Support	Yes (2-Channel Stereo)	
On Screen Display	No	
Cascadable	No	
Rack-Mountable	No	
Enclosure Type	Steel	
Operating Temperature	0°C to 40°C (32°F to 104°F)	
Storage Temperature	-20°C to 40°C (4°F to 104°F)	
Humidity	0~90% RH Non-Condensing	
Dimensions (LxWxH)	165 x 89 x 46mm	265 x 102 x 46mm
Weight	940g	1000g
Power	9V 1A	

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit www.startech.com for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>