

User Guide

NMP-530

Network Media Player (NMP)



This page is blank for dual-sided printing.

Copyright © ViewSonic Corporation, 2006. All rights reserved.

ViewSonic and the three birds logo are registered trademarks of ViewSonic Corporation.

Microsoft Internet Explorer and Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries.

Intel and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries

Tivella and the Tivella logo are trademarks of Tivella, Inc.

Cisco is a registered trademark and this document may include service marks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries.

Corporate names and trademarks are the property of their respective companies.

Disclaimer: ViewSonic Corporation shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from furnishing this material, or the performance or use of this product.

In the interest of continuing product improvement, ViewSonic Corporation reserves the right to change product specifications without notice. Information in this document may change without notice.

No part of this document may be copied, reproduced, or transmitted by any means, for any purpose without prior written permission from ViewSonic Corporation.

Product Registration

To meet your future needs, and to receive any additional product information as it becomes available, please register your product on the Internet at:

www.viewsonic.com. The **ViewSonic** product may come with a CD-ROM that has a registration form you can print and mail or fax to **ViewSonic Corporation**.

For Your Records	
Model Name:	NMP-530
Model Number:	VS11681
Document Number:	NMP-530_UG_ENG_REV1B 13-FEB-07
Serial Number:	_____
Purchase Date:	_____

Product disposal at end of product life

ViewSonic is concerned about the preservation of our environment. Please dispose of this product properly at the end of its useful life. Your local waste disposal company may provide information about proper disposal.

This page is blank for dual-sided printing.

Contents

INTRODUCTION

Packaged Contents	1
Requirements	2
System Requirements	2
PC Requirements (for basic server)	2
Software Requirements	2
Features	2
Two Modes of Operation	3
Standalone	3
TAS Managed	3
Front View	4
Back View	4
Remote Control	4

SETUP

Connect To A Display	5
Connect To A Router	6
Turn Power On	7
IP Address	8
Login	8
Start URL	9
Set Video Output of NMP-530	10
Put Batteries in Remote Control	11

MANAGEMENT

Startup URLs/Network Configuration	12
Browser Configuration	13
Video/Audio Configuration	15
TAS Configuration	16
FTP Server	17
System Services Configuration	18

ACTIONS

Video UDP Multicast 19
 Video RTP Multicast 20
 Video HTTP 21
 Video File 22
 Playing content from local storage 22
 Video IPTV 23
 Playlist 24
 To create a playlist 24
 Transparency 25
 Go to URL 26

ADMINISTRATION

Advanced Video Configuration 27
 Security 28
 Save Configuration 29
 Default Settings 29
 Reboot 30
 Firmware Upgrade 30

HELP

Status 31
 License 32
 About 32

APPENDIX

Compliance and Safety Notices 33
 Screens 36
 Management 36
 Actions 37
 Administration 38
 Help 38
 Customer Support 39
 Specifications 40
 Limited Warranty 41

INTRODUCTION

Thank you for buying the **ViewSonic® Network Media Player**. This section introduces you to the **NMP-530**.

PACKAGED CONTENTS

Please check that all the following items are in the package:



S-Video/YPbPr Adapter



NMP-530



AC Power Adapter



RS-232 Cable




Remote Control and
Two Batteries



RJ-45 Ethernet Cable



ViewSonic CD



Quick Start Guide

REQUIREMENTS

The **NMP-530** requires the following:

SYSTEM REQUIREMENTS

System requirements include a display, a network environment, and a PC with network capability.

PC REQUIREMENTS (FOR BASIC SERVER)

- Operating System: Any Windows® or Linux OS capable of running a web server
- Processor: Intel® Pentium® 4, 1 GHz or higher (or compatible microprocessor)
- Memory: 512 MB RAM or more
- Network Interface: 100Base-TX

SOFTWARE REQUIREMENTS

Software applications need to be purchased separately in order to create material for playback, such as graphics, video, and Flash files, etc.


FEATURES

- Replaces remote PC that drives a display screen.
- Network ready for easy installation.
- Standards-based design for high inter-operability with other network devices and software.
- Pre-installed software application enables it to work right out of the box. No additional software required.
- Integrated Web browser with Flash plug-in, standalone Flash player, HD (High-Definition) player.
- Provides fast, efficient delivery of digital content using IP Technology.
- MPEG1, MPEG2, MPEG4, and Macromedia Flash support.
- Powerful combination of Sigma Design's EM8621L and Freescale's MPC8247 resulting in smooth playback operation.
- Supports multicast and unicast digital broadcast applications.
- Small form factor for installation in tight spaces. Can easily be hidden from view.
- Multiple video outputs enable flexibility.
- Devices can be remotely controlled from virtually anywhere on a network or with an Internet connection.

TWO MODES OF OPERATION


STANDALONE

Standalone setup allows the **NMP-530** to act as an independent network device to display content on a Plasma Display Panel (PDP) or a Liquid Crystal Display (LCD) for digital signage or narrowcasting applications. Content can come from either the remote server or local storage on the **NMP-530**.

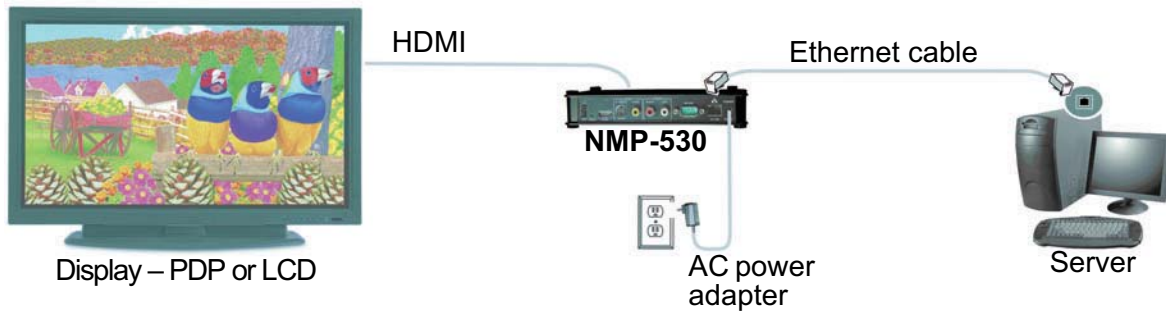

TAS MANAGED


You can purchase TAS separately through Tivella (www.tivella.com or a Tivella dealer/reseller). A TAS server should be used to configure and manage multiple **NMP-530s** remotely. TAS provides centralized scheduling of video content presentation on multiple **NMP-530s**, as well as management and seamless operation of a Cisco® ACNS Content Distribution Networking infrastructure if one is installed. This configuration greatly reduces maintenance overhead, when TAS and the **NMP-530** are connected to the network (LAN/WAN) with the TAS acting as a manager for multiple **NMP-530s**.

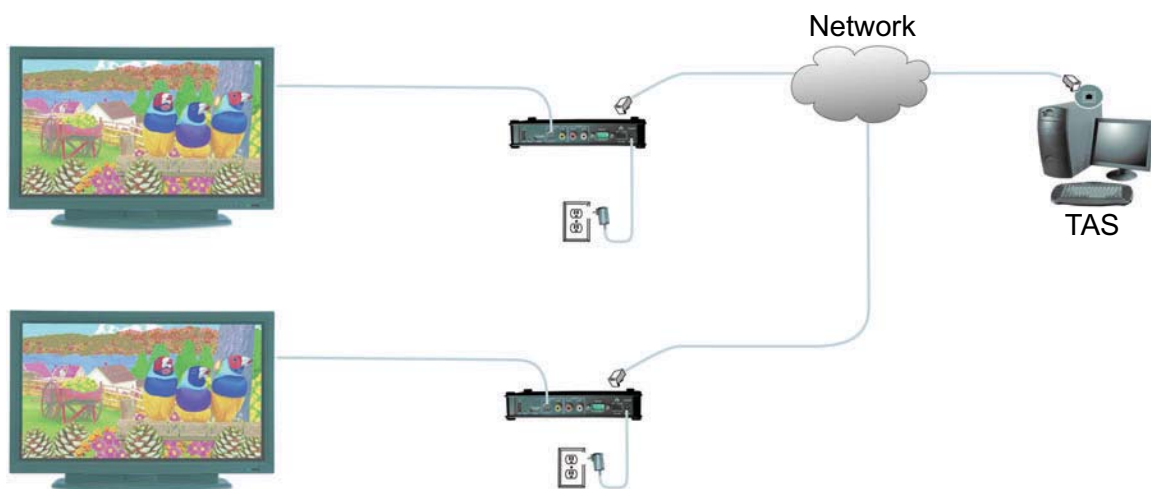

FRONT VIEW




BACK VIEW

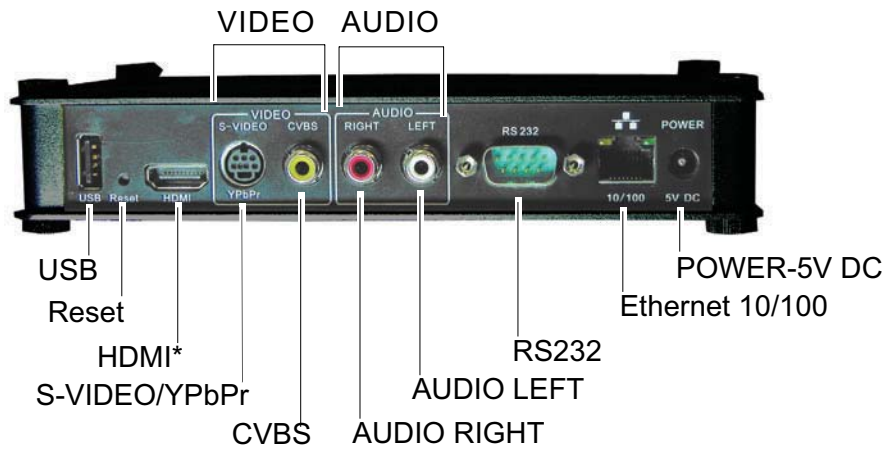

*If your monitor has a DVI input, use an HDMI-to-DVI cable.

REMOTE CONTROL

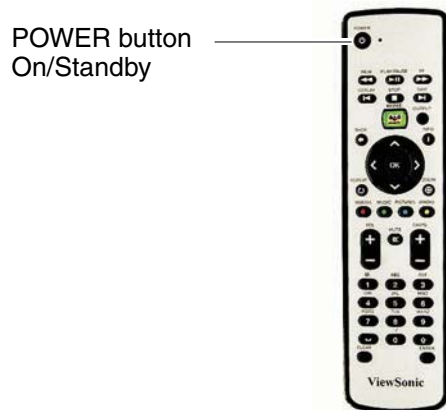

SETUP

For the initial setup, you need the following:

- A Router with DHCP services
- A TV or Display with Composite or S-Video input for initial setup. During the setup, you can change the **NMP-530** output to the final display being used.
- A PC with Internet Browser

1. CONNECT TO A DISPLAY


Connect the S-Video or Composite output of the **NMP-530** to the corresponding input on your TV or other display.



2. CONNECT TO A ROUTER

Connect the supplied RJ-45 ethernet cable from the **NMP-530** to a router with DHCP services. Refer to your router's user guide or contact your network administrator for assistance.

E
N
G
L
I
S
H

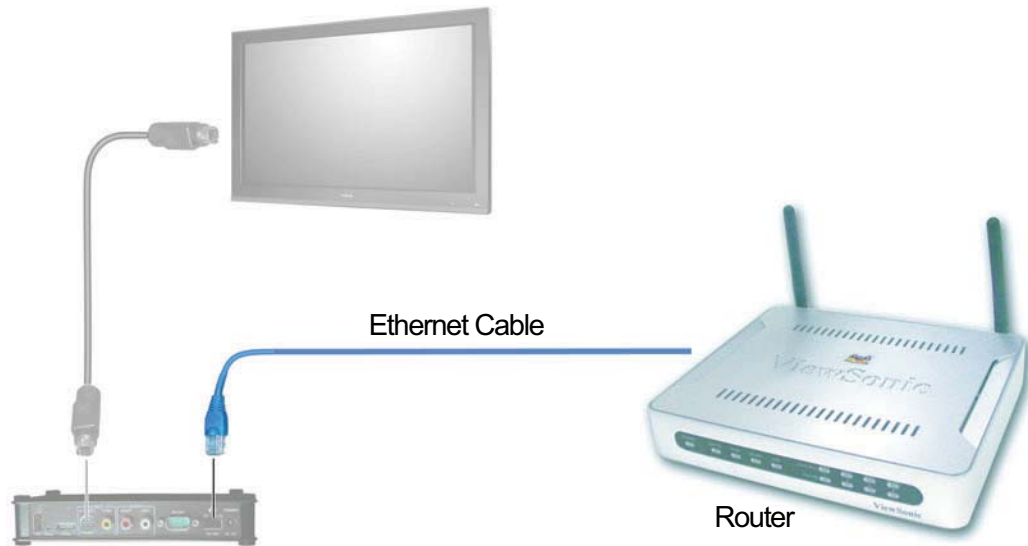

3. TURN POWER ON

Connect the supplied DC Plug on the AC Power Adapter into the **NMP-530**. Turn the TV or the Display power on making sure that the Input is on the proper setting. Plug the AC Adapter to a wall outlet.



4. IP ADDRESS

Wait a few seconds and the IP Address of the **NMP-530** appears on the screen. Make a note of the IP information as this will be used to login to the **NMP-530**.



5. LOGIN

Open an **Internet Browser**, i.e., **Internet Explorer** on a PC in the same network. In the **URL address field**, type the IP address of the **NMP-530** noted in the previous step > press **Enter**. The **Login** screen appears. Type the defaults **Login: admin** and **Password: admin**. For security purposes, we recommend that you change the Login and Password. *For more information, see the **Security** section in this **NMP-530 User Guide**.* After logging in successfully, the **Network Configuration** screen appears as shown in the next step. **Note:** The **NMP-530** automatically logs you out after fives (5) minutes of inactivity.

6. START URL

Under **Management** click **Startup**. The screen shown below appears. In the **Video** field, enter a valid URL. Or, in the **Browser** field, enter a valid web page.

<div style="text-align: right;"> <input type="button" value="Show IP"/> <input type="button" value="Video"/> <input type="button" value="Browser"/> </div> <ul style="list-style-type: none"> → Management Startup Browser Video/Audio TAS FTP Server System Services Actions Video UDP Multicast Video RTP Multicast Video HTTP Video File Video IPTV Playlist Transparency Go to URL Administration Advanced Video Security Save Configuration Default Settings Reboot Firmware Help Status License About 	<div style="text-align: center; background-color: #4F81BD; color: white; padding: 2px;">Startup URLs</div> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: right;">Video</td> <td><input type="text"/></td> </tr> <tr> <td style="text-align: right;">Failover Video</td> <td><input type="text"/></td> </tr> <tr> <td style="text-align: right;">Browser</td> <td><input type="text" value="http:\\www.viewsonic.com"/></td> </tr> <tr> <td style="text-align: right;">Failover Browser</td> <td><input type="text"/></td> </tr> <tr> <td style="text-align: right;">Number of retries before go to Failover Browser</td> <td><input type="text" value="10"/></td> </tr> <tr> <td style="text-align: right;">Timeout between retries (milliseconds)</td> <td><input type="text" value="5000"/></td> </tr> </table>	Video	<input type="text"/>	Failover Video	<input type="text"/>	Browser	<input type="text" value="http:\\www.viewsonic.com"/>	Failover Browser	<input type="text"/>	Number of retries before go to Failover Browser	<input type="text" value="10"/>	Timeout between retries (milliseconds)	<input type="text" value="5000"/>		
	Video	<input type="text"/>													
Failover Video	<input type="text"/>														
Browser	<input type="text" value="http:\\www.viewsonic.com"/>														
Failover Browser	<input type="text"/>														
Number of retries before go to Failover Browser	<input type="text" value="10"/>														
Timeout between retries (milliseconds)	<input type="text" value="5000"/>														
	<div style="text-align: center; background-color: #4F81BD; color: white; padding: 2px;">Network Configuration</div> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: right;">MAC address</td> <td><input type="text" value="00:0f:44:00:5b:36"/></td> </tr> <tr> <td style="text-align: right;">DHCP</td> <td><input type="text" value="Enabled"/></td> </tr> <tr> <td style="text-align: right;">IP address</td> <td><input type="text" value="192.168.12.38"/></td> </tr> <tr> <td style="text-align: right;">Subnet mask</td> <td><input type="text" value="255.255.255.0"/></td> </tr> <tr> <td style="text-align: right;">Default gateway</td> <td><input type="text" value="192.168.12.1"/></td> </tr> <tr> <td style="text-align: right;">DNS server IP address</td> <td><input type="text" value="192.168.12.1"/></td> </tr> <tr> <td colspan="2" style="text-align: center;"><input type="button" value="Apply"/></td> </tr> </table>	MAC address	<input type="text" value="00:0f:44:00:5b:36"/>	DHCP	<input type="text" value="Enabled"/>	IP address	<input type="text" value="192.168.12.38"/>	Subnet mask	<input type="text" value="255.255.255.0"/>	Default gateway	<input type="text" value="192.168.12.1"/>	DNS server IP address	<input type="text" value="192.168.12.1"/>	<input type="button" value="Apply"/>	
MAC address	<input type="text" value="00:0f:44:00:5b:36"/>														
DHCP	<input type="text" value="Enabled"/>														
IP address	<input type="text" value="192.168.12.38"/>														
Subnet mask	<input type="text" value="255.255.255.0"/>														
Default gateway	<input type="text" value="192.168.12.1"/>														
DNS server IP address	<input type="text" value="192.168.12.1"/>														
<input type="button" value="Apply"/>															

7. SET VIDEO OUTPUT OF NMP-530

By default, the video output is set to S-Video. But, you can choose any one of the following connections if you prefer, depending on the type of display input you want to use.


HDMI: Connect a HDMI cable from the back of the **NMP-530** to the HDMI interface on the back of the display.

S-Video: Default. Connect an S-Video cable from the S-Video interface on the back of the **NMP-530** to the S-Video interface on the back of the display.

Component: Using the S-Video/YPbPr adapter.

Composite: Using an RCA cable.

To change the output setting, login to the **NMP-530**, under **Management** click **Video/Audio**. The screen shown below appears. *For more information, see the **Video/Audio Configuration** section in this guide.*

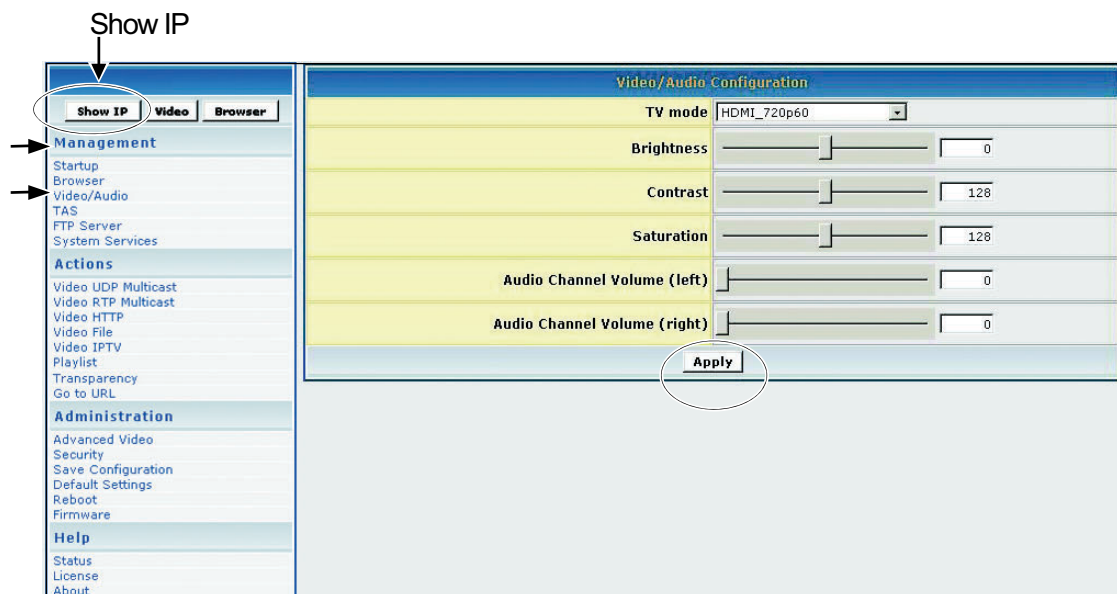

1. In the **TV Mode** field, click the down arrow for the pull-down menu and select one of the resolutions required by your display (PDP or LCD).
2. If any changes were made to this screen, do the following:
 - To enable the changes, click **Apply**
 - To save the changes, under **Administration** click **Save Configuration** > click **Save**.

8. PUT BATTERIES IN REMOTE CONTROL


Remove the back cover from the remote control as shown below. Put two AA batteries in the battery compartment. Be sure to match the positive end of the battery with the positive end in the compartment. Put the cover back on the remote control.



MANAGEMENT

STARTUP URLS/NETWORK CONFIGURATION

The **Network Configuration** screen allows you to select the video that appears on-screen when you boot up the **NMP-530**. To go to the **Network Configuration** screen after logging into the **NMP-530**, under **Management** click **Startup**. The **Startup URLs** screen and the **Network Configuration** screen appears as shown below. **Failover Video** and **Failover Browser** - the URL entered on these fields will be enabled if the main Video and Browser Startup URL's failed to play.

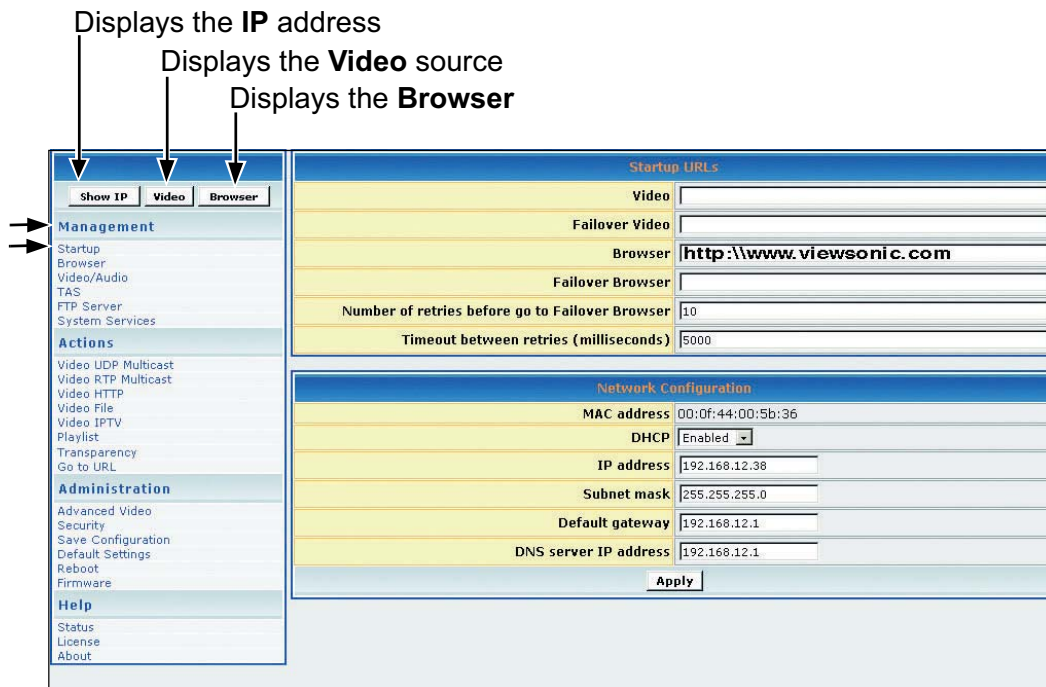

- 1 To play a particular video at startup, in the **Video** field, enter a valid HTML page. Here are some examples:
 - **http://<ip-address>/<mpeg-1/2-file-located on WEB Server>**
 - **udp://<ip-multicast-address>/port**
 - **rtp://<multicast-address>/port**
 - **iptv://<ip-multicast-address>/videoport/audioport**
 - **playlist=http://<ip-address>/<playlist-file-located-on-WEB-server>**
2. In the **Browser** field, enter a startup web screen (for example, <http://www.viewsonic.com>). Note: The **MAC address** is a read-only field that displays the built-in MAC address of the unit.


Continued . . .

3. In the **DHCP** field of the **Network Configuration** screen, tap the down arrow for the pull-down menu and select **Enabled** to dynamically get network parameters. Make sure there are values in the **IP address**, **Mask**, **Gateway**, and **DNS** fields although DHCP assigns values to these fields automatically. If you select **Disabled**, type valid network parameters in these fields.
4. If any changes were made to this screen, do the following:
 - To enable the changes, click **Apply**
 - To save the changes, under **Administration** click **Save Configuration** > click **Save**.

BROWSER CONFIGURATION

The **Browser Configuration** screen allows you to make specific screen settings for a specific URL that you chose. under **Management** click **Browser**. The screen shown below appears.

Note: 1 millisecond = 1/1000th second.

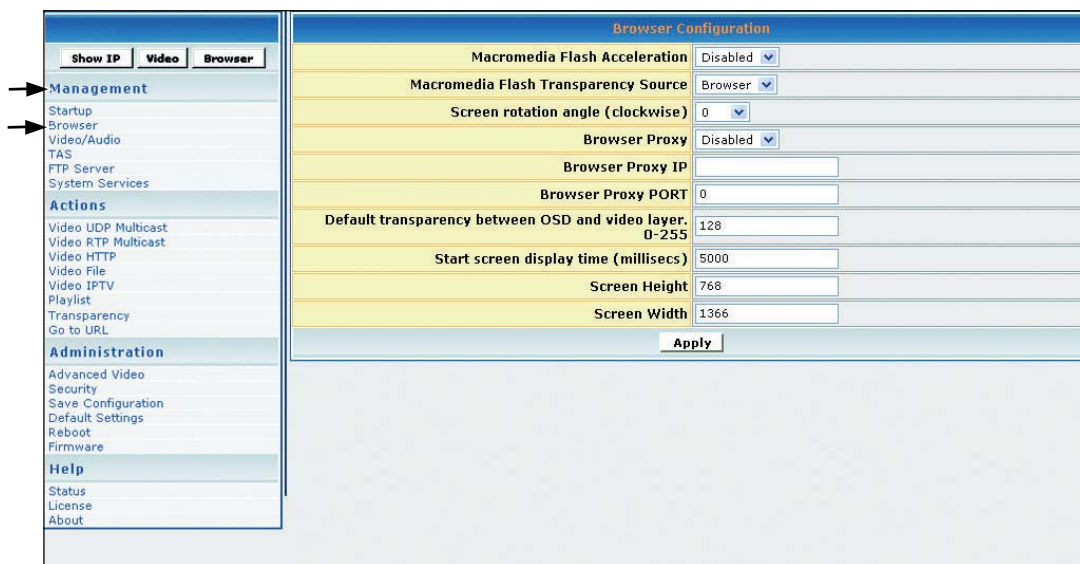


1. In the **Macromedia Flash Transparency Source** field, select one of the options from the pull-down menu.
2. In the **Screen rotation angle (clockwise)** field, select one from the pull-down menu for the angle of rotation of the HTML content displayed on-screen. This feature is useful when the **NMP-530** is installed vertically.

Continued . . .

3. In the **Browser Proxy** field, select **Enabled** or **Disabled** from the pull-down menu.
4. In the **Browser Proxy IP** field, type an IP address if the **Browser Proxy** was Enabled.
5. In the **Browser Proxy PORT** field, type the port if the **Browser Proxy** was Enabled.
6. In the **Default transparency between OSD and video layer** field, type a number that is between 0 to 255: (128 is average where video and graphics blend together). Also, see examples in the Transparency section of this guide.
 - 0 = video only, no graphics
 - 255 = graphics only, no video
7. In the **Start screen display time** field, type the number of milliseconds you want the initial screen to be displayed at startup. (1 millisecond = 1/1000 second)
8. In the **Screen Height** field, type the height of the screen that is displaying your graphics image.
9. In the **Screen Width** field, type the width of the screen that is displaying your graphics image.
10. If any changes were made to this screen, do the following:
 - To enable the changes, click **Apply**
 - To save the changes, under **Administration** click **Save Configuration** > click **Save**.

VIDEO/AUDIO CONFIGURATION

This screen is used to adjust the display and audio parameters. Under **Management** click **Video/Audio**. The screen shown below appears.

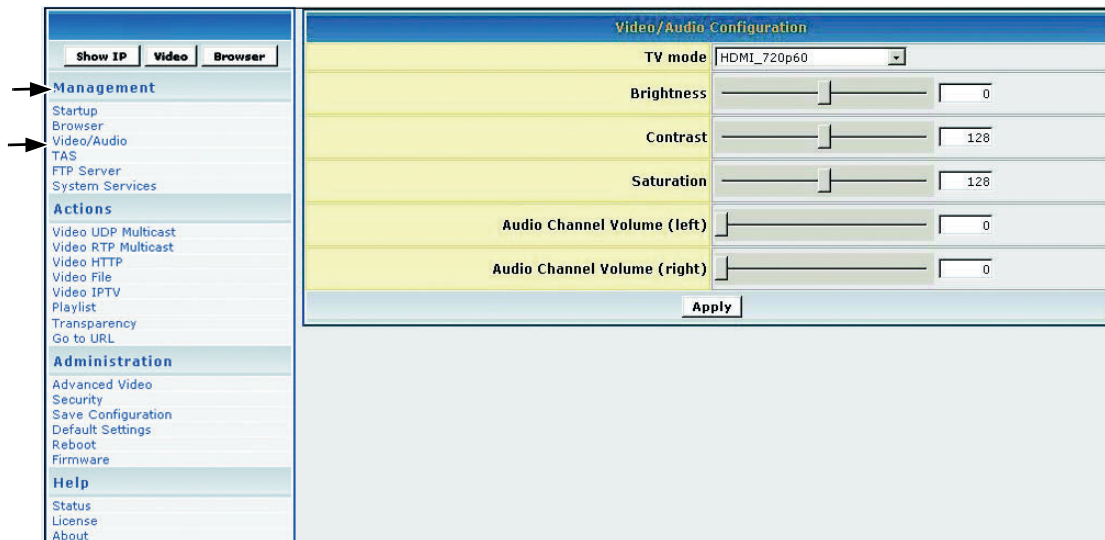

1. In the **TV Mode** field, click the down arrow for the pull-down menu and select one of the options.
2. Move the **Brightness** slider: values range between -128 and 127
3. Move the **Contrast** slider: values range between 0 and 255
4. Move the **Saturation** slider: values range between 0 and 255
5. Move the **Audio Channel Volume** (left) slider: values range between 0 and 100
6. Move the **Audio Channel Volume** (right) slider: values range between 0 and 100
7. If any changes were made to this screen, do the following:
 - To enable the changes, click **Apply**
 - To save the changes, under **Administration** click **Save Configuration** > click **Save**.

TAS CONFIGURATION

This screen works in conjunction with **TAS**. (TAS software can be purchased through Tivella at www.tivella.com or through an authorized Tivella dealer/reseller.) Under **Management** click **TAS**. The screen shown below appears.

The screenshot displays the TAS Configuration web interface. On the left is a navigation menu with the following sections:

- Management**: Startup, Browser, Video/Audio, TAS, FTP Server, System Services
- Actions**: Video UDP Multicast, Video RTP Multicast, Video HTTP, Video File, Video IPTV, Playlist, Transparency, Go to URL
- Administration**: Advanced Video, Security, Save Configuration, Default Settings, Reboot, Firmware
- Help**: Status, License, About

The main content area, titled "TAS Configuration", contains the following fields and controls:


- Timeout (sec)**: A text input field containing the value "20".
- IP Address**: A text input field containing the value "tas-intranet".
- Apply**: A button located below the IP Address field.

1. In the **Timeout (sec)** field, type the number of seconds for the **NMP-530s** to access TAS.
2. In the **IP Address** field is a valid DNS name automatically generated by TAS when connected to a network: when used as a standalone, the field is blank.
3. If any changes were made to this screen, do the following:
 - To enable the changes, click **Apply**
 - To save the changes, under **Administration** click **Save Configuration** > click **Save**.

FTP SERVER

Uploading content to local storage using FTP:


1. To enable **FTP Server** under **Management** click **System Services**. The **System Services Configuration** screen appears as shown on the next page. In the **FTP Server** field, select **YES** > click **Apply**. To save your settings on the **NMP-530**, under **Administration** click **Save Configuration** > **Reboot**.
2. The **FTP server** user name and password default **Username** and **Password** is **admin/admin**. For security reasons, it is recommended that the default be changed. To change the **FTP server** user name and password, click **FTP Server** under **Management**. The screen shown below appears. Enter a new user name and password > click **Apply**. To save your settings on the **NMP-530**, under **Administration** click **Save Configuration** > **Save** > **Reboot**.

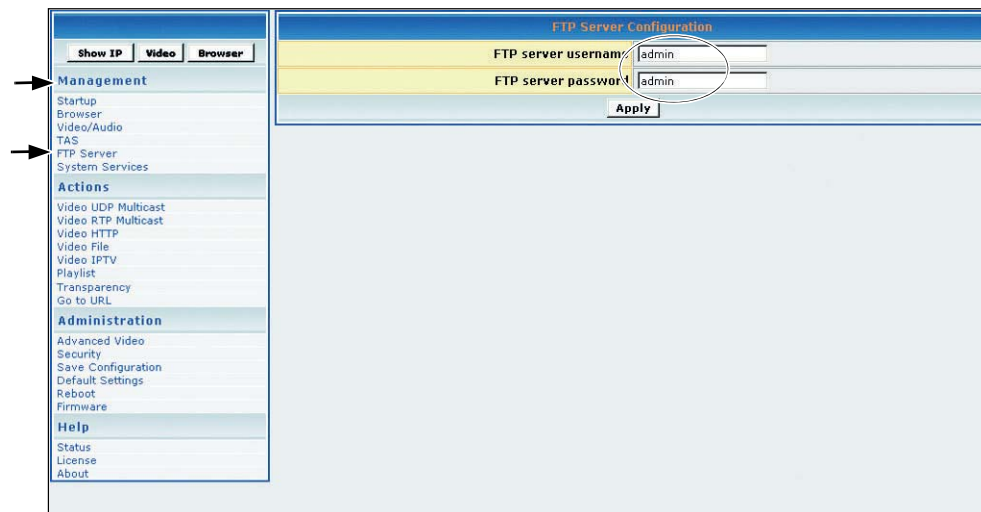

3. Using an FTP Client software (i.e. Cute FTP, etc.), use the IP Address of the **NMP-530** as the FTP Server address and enter the username and password set in Management/FTP Server (default: admin/admin).
4. Open the folder hd1 and start uploading content to the local storage. Both videos and web pages can be downloaded onto the storage.

SYSTEM SERVICES CONFIGURATION

Configure System Services in the MIB (Management Information Base) to manage the following groups: Network, Browser, Video/Audio, TAS, and System Services. Under **Management** click **System Services**. The screen shown below appears.

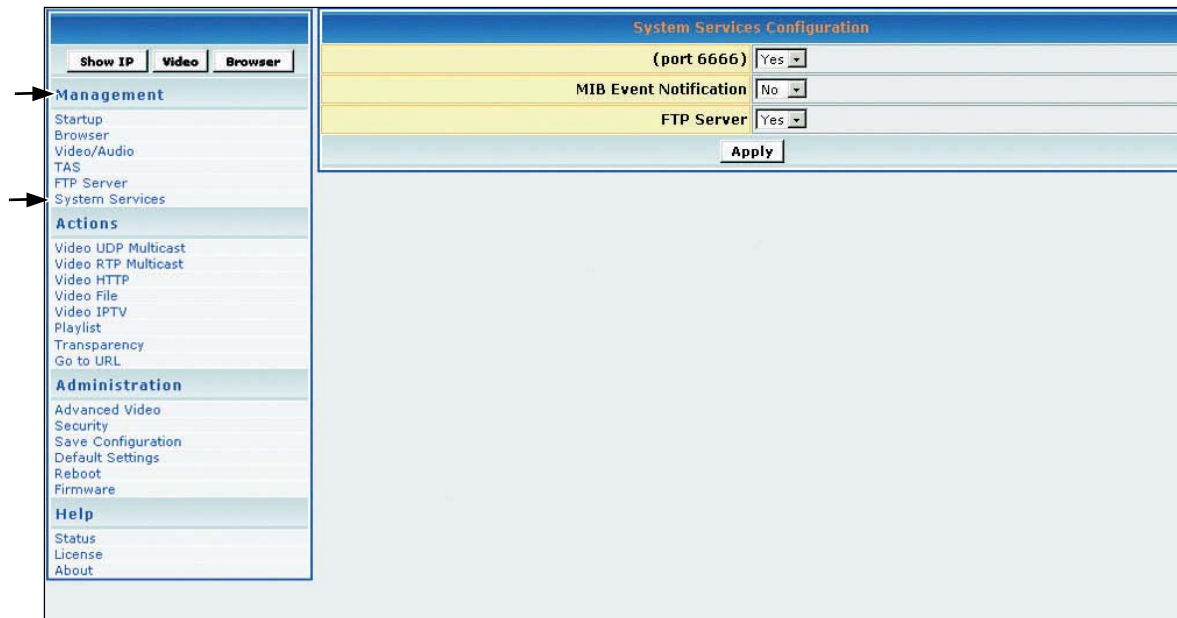


1. In the **(port 6666)** field, select **Yes** to access the **NMP-530** using a Telnet client on port 6666. If you do not want this, select **No**.
2. In the **MIB Event Notification** field, select **Yes** to be notified of changes that you made to the **NMP-530** settings.
3. **FTP Server** - select **YES** to enable uploading of files to the local storage.
4. If any changes were made to this screen, do the following:
 - To enable the changes, click **Apply**
 - To save the changes, under **Administration** click **Save Configuration** > click **Save**.

ACTIONS

This section mainly concerns video related activities. Video can be streamed and organized in Playlists. When you initiate a stream, you can see the video on your display. You can also change the **Transparency** of the screen or go to a specific URL on the fly.

VIDEO UDP MULTICAST


This screen allows you to play streams using the assorted protocols. Under **Actions** click **Video UDP multicast**. The screen shown below appears.

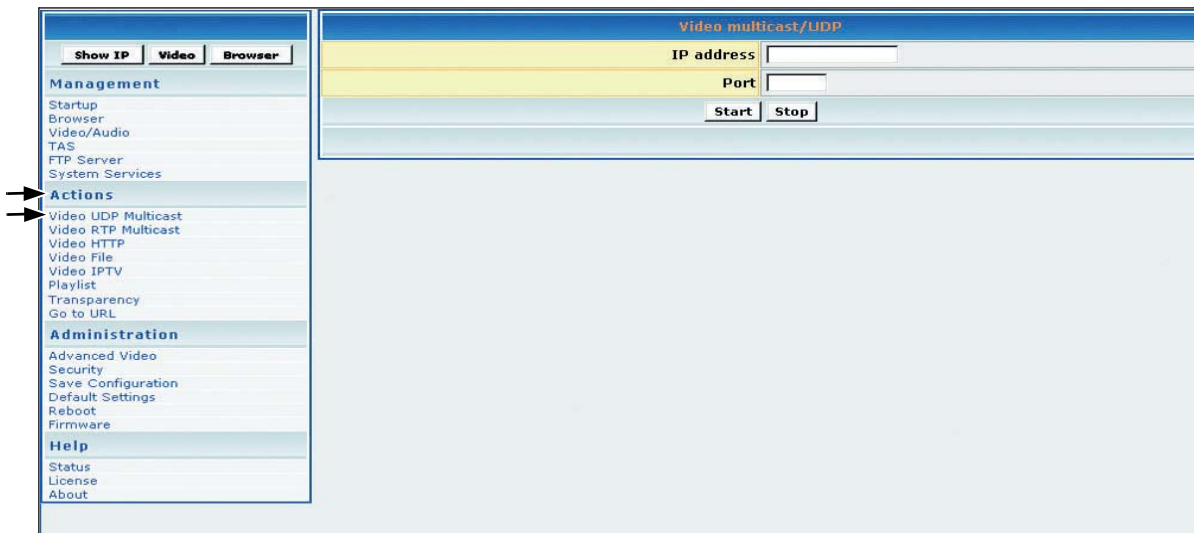

1. In the **IP address** field, type the IP Address transmitting UDP based multicast stream (for example, 239.1.1.7)
2. In the **Port** field, type the **Port** number used to receive the multicast.
3. To tell the system to listen to the UDP multicast stream from the IP on the Port that you entered, click **Start**.

VIDEO RTP MULTICAST


This screen allows you to play streams using the assorted protocols. Under **Actions** click **Video RTP multicast**. The screen shown below appears.

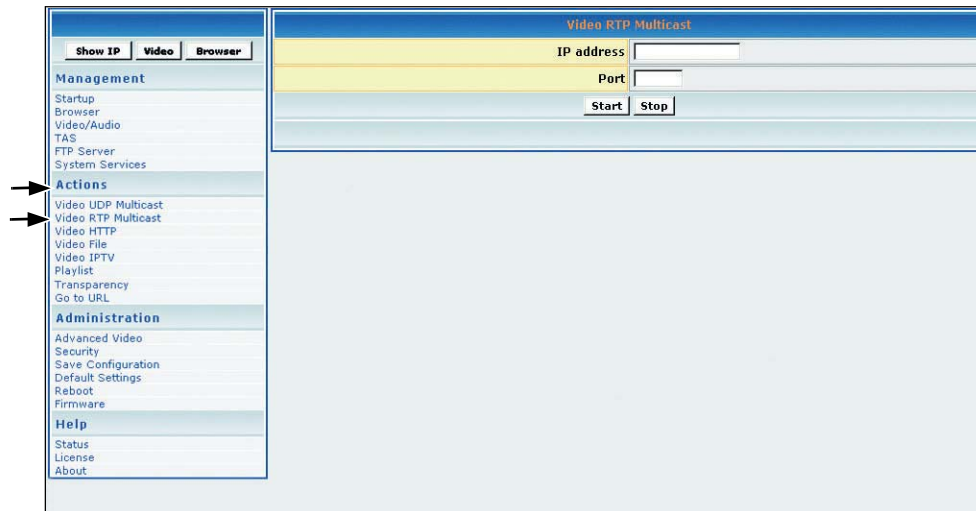

1. In the **IP address** field, type the IP Address transmitting RTP based multicast stream (for example, 239.1.1.7)
2. In the **Port** field, type the **Port** number used to receive the multicast.
3. To tell the system to listen to the UDP multicast stream from the IP on the Port that you entered, click **Start**.

VIDEO HTTP

Video HTTP is used to play MPEG files residing on a web/HTTP server. The video is played once and is not looped. Under **Actions** click **Video HTTP**. The screen shown below appears.

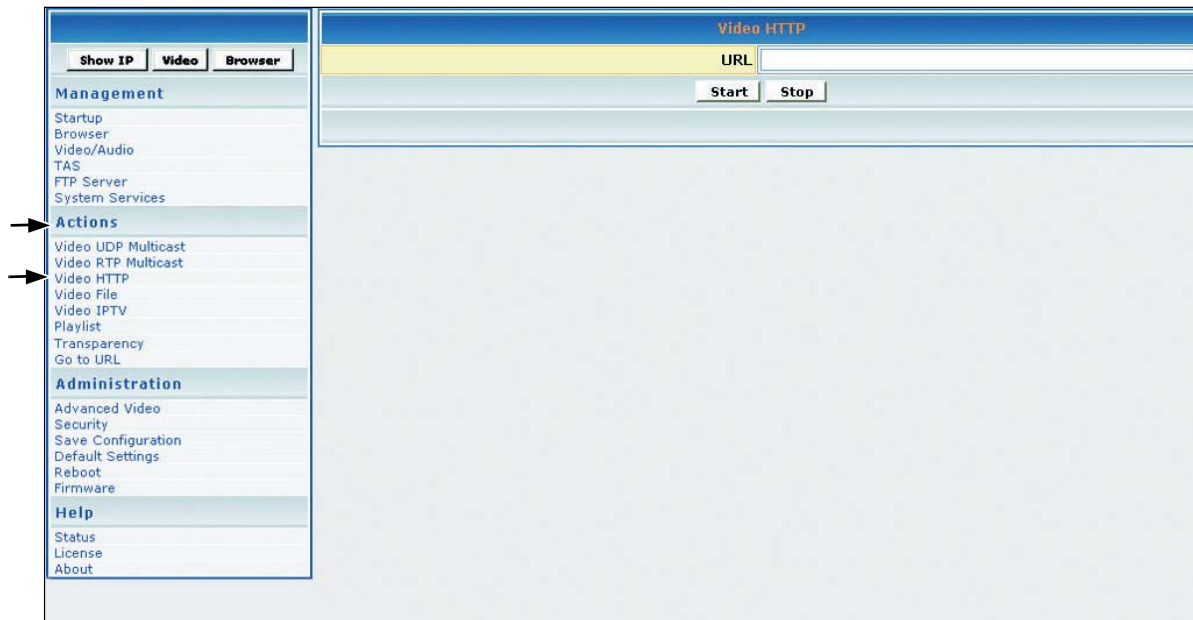


1. In the **URL** field, type the URL that corresponds to the HTTP stream that you want to appear on the display (for example: `http:192.168.12.x/movie.mpg`, or, `http://<server-ip>/file.mpg`).
2. To tell the system to listen to the HTTP stream from the entered URL, click **Start**.

VIDEO FILE

The **Video File** screen allows you to play video files stored in the internal Hard Drive. Under **Actions** click **Video File**. The screen shown below appears. The video is played once and not looped.

E
N
G
L
I
S
H

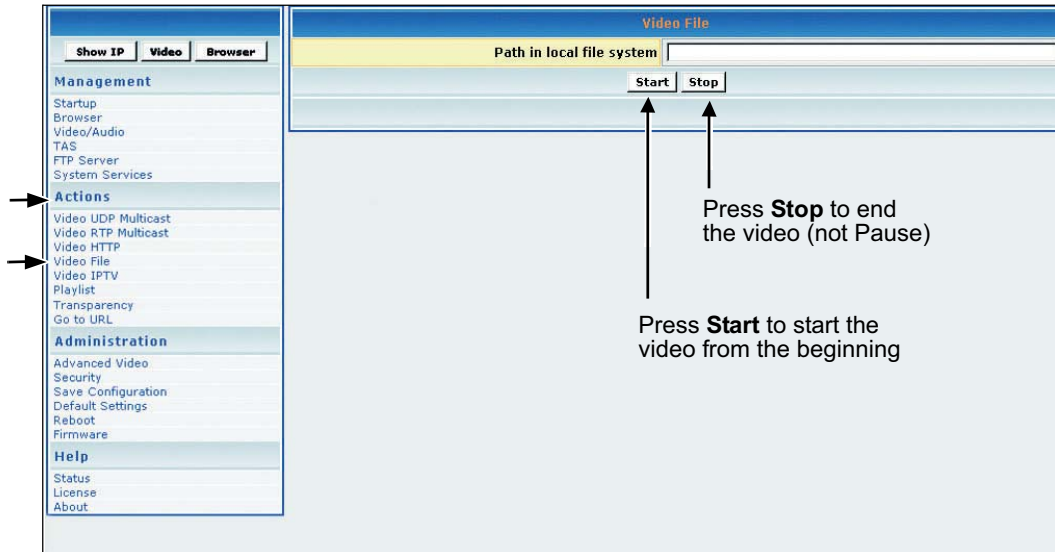


1. In the **Video File** field, type the location of the video content in the storage: for example, /tmp/ftproot/hd1/sample_video.mpg > click **Start**.
2. If the video file is inside a folder (for example: /movie) in the hard drive, type /tmp/ftproot/hd1/**movie**/sample_video.mpg

PLAYING CONTENT FROM LOCAL STORAGE

The default local storage address is as follows: file:///tmp/ftproot/hd1. This is where all uploaded content resides. If certain content resides in a folder under hd1, then write the address as follows: file:///tmp/ftproot/hd1/<foldername>.

VIDEO IPTV


The **Video IPTV** screen allows you to play Split Stream files where the video and audio information being streamed is in two different addresses. This is similar to RTP multicast except the values for video and audio are entered separately. To get to the **Video IPTV** screen, under **Actions** click **Video IPTV**. The screen shown below appears.

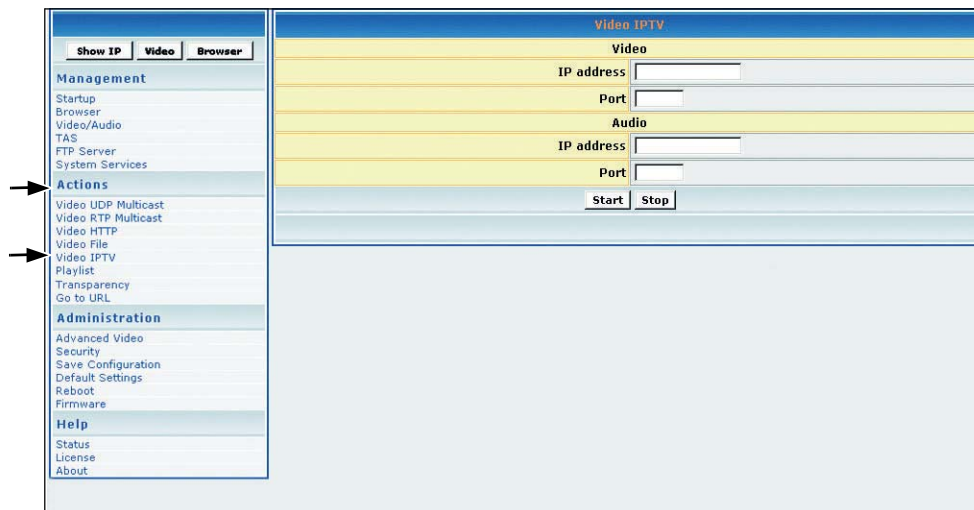

1. Under **Video**, enter the **IP Address** and **Port** of the Video stream
2. Under **Audio**, enter the **IP Address** and **Port** of the Audio stream
3. Click **Start**

PLAYLIST

Playlist is useful for playing multiple MPEG videos in succession and/or looping MPEG videos. To stream existing video **Playlists** on an HTTP server, under **Actions** click **Playlist**. The screen shown below appears.

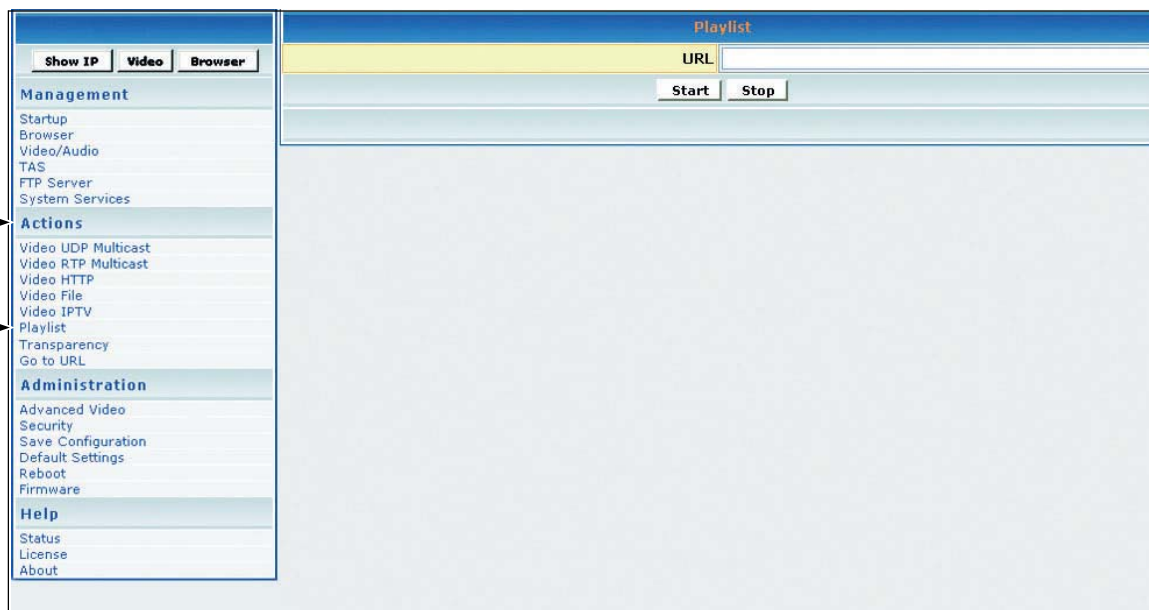

TO CREATE A PLAYLIST


A **Playlist** is a text file that can be created in any text editor with an extension of .txt. A **Playlist** is necessary when you want the **NMP-530** to play specific content, in a specific order, usually looped. A **Playlist** can be created for the http streams. Example of a looped **Playlist**:

```
loop
http http://192.168.12.x/movie1.mpg
http http://192.168.12.x/movie2.mpg
http http://192.168.12.x/movie3.mpg
```

For a **Playlist** that is not looped, list the desired content without the keyword "loop."

TRANSPARENCY

To change the transparency of the browser OSD (On-Screen Display) in relation to the video image in the background, under **Actions** click **Transparency**. The screen shown below appears.

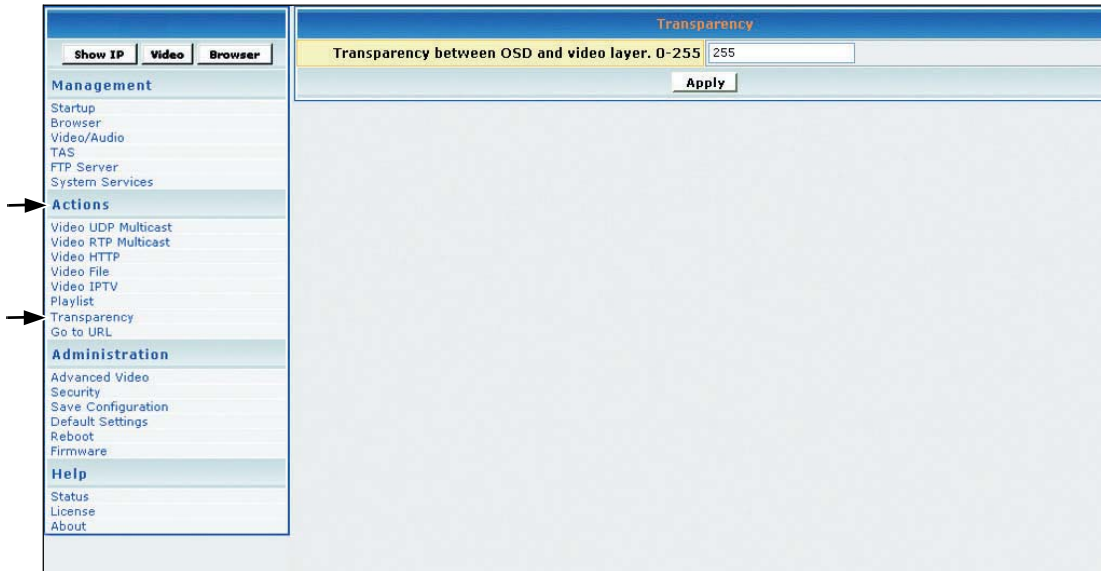

1. In the **Transparency between OSD and video layer** field, type a number between 0 to 255 for a more or less transparent (translucent) browser image so you can still see through the browser as shown below on the right with your video or other images: 0 = no OSD, 255 = no video, 128 = equal transparency between video and OSD layers.




2. To apply the entered transparency value to the image on the **NMP-530**, click **Apply**.

Go to URL

This screen is used to display HTML-based content. Under **Actions** click **Go to URL**. The screen shown below appears.

E
N
G
L
I
S
H

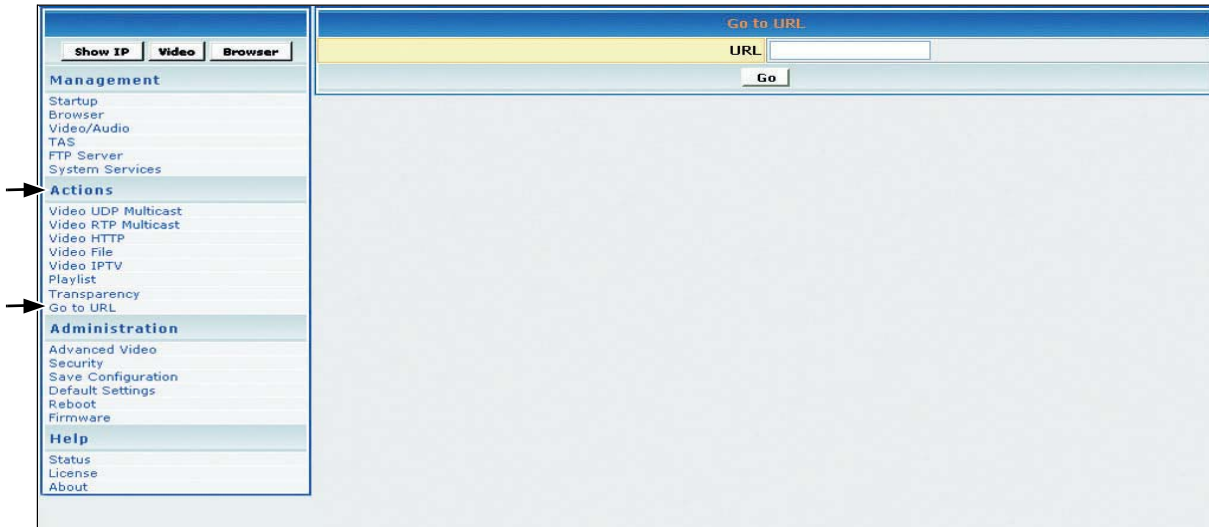

1. In the **URL** field, type the desired URL.
2. To redirect the browser to the URL that you entered, click **Go**. The web page appears on your display.

NOTE: Check the Transparency setting if the browser screen does not appear after a few seconds. You can also click the **Browser** button to maximize the browser transparency.

ADMINISTRATION

ADVANCED VIDEO CONFIGURATION

To adjust the size and location of the video on the screen, under **Administration** click **Advanced video**. The screen shown below appears.

Advanced video Configuration	
X of destination window	2048
Y of destination window	2048
Width of destination window	4096
Height of destination window	4096
<input type="button" value="Apply"/>	

1. In the **X of destination window**, type the center point of the screen on the X axis.
2. In the **Y of destination window**, type the center point of the screen on the Y axis.
3. In the **Width of destination window**, type the width of the destination window.
4. In the **Height of destination window**, type the height of the destination window.
5. If any changes were made to this screen, do the following:
 - To enable the changes, click **Apply**
 - To save the changes, under **Administration** click **Save Configuration** > click **Save**.

NOTE: X (max) = 4096, Y (max) = 4096 denotes height and width for X & Y destination

X = 2048 and Y = 2048 is actually the center point of the screen.

SECURITY


To change the **User name** and **Password** of the **NMP-530**, under **Administration** click **Security**. Current settings automatically appear in each field as shown below: default User name/Password is admin/admin.

The screenshot shows the 'Security Credentials' configuration page. On the left, a navigation menu is visible with categories: Management, Actions, Administration, and Help. The 'Administration' menu is expanded, and 'Security' is selected. The main content area contains three input fields: 'User name' with the value 'admin', 'Password' with '*****', and 'Repeat password' with '*****'. An 'Apply' button is located below the 'Repeat password' field.

1. In the **Password** field, type a new password.
2. In the **Repeat Password** field, re-type the new password.
3. If any changes were made to this screen, do the following:
 - To enable the changes, click **Apply**
 - To save the changes, under **Administration** click **Save Configuration** > click **Save**.


SAVE CONFIGURATION

To save your settings on the **NMP-530**, under **Administration** click **Save Configuration**. The screen shown below appears. Click **Save**.

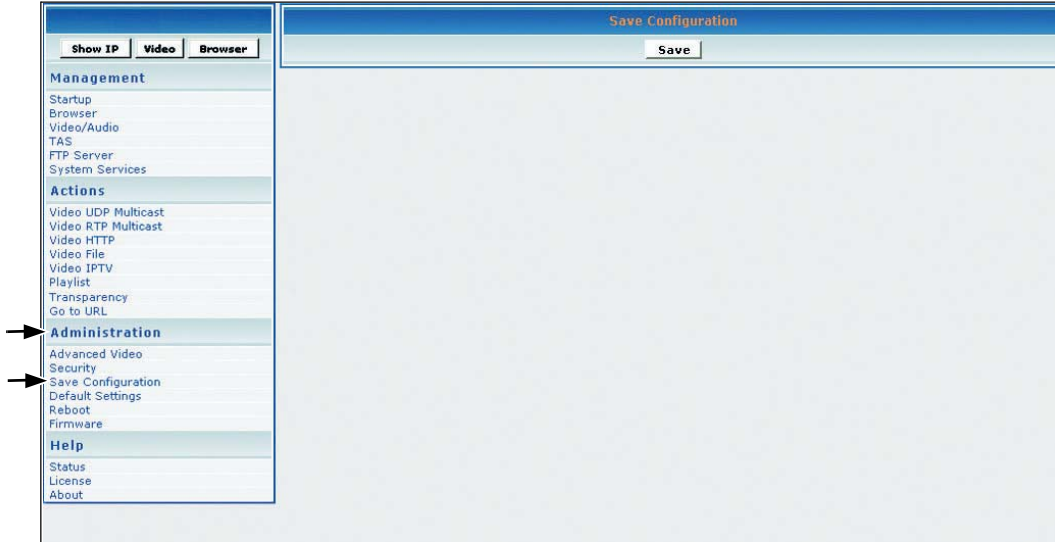


DEFAULT SETTINGS

To restore the **NMP-530** back to factory settings, under **Administration** click **Default Settings**. The screen shown below appears. Click **Restore**. User-defined settings will be lost.

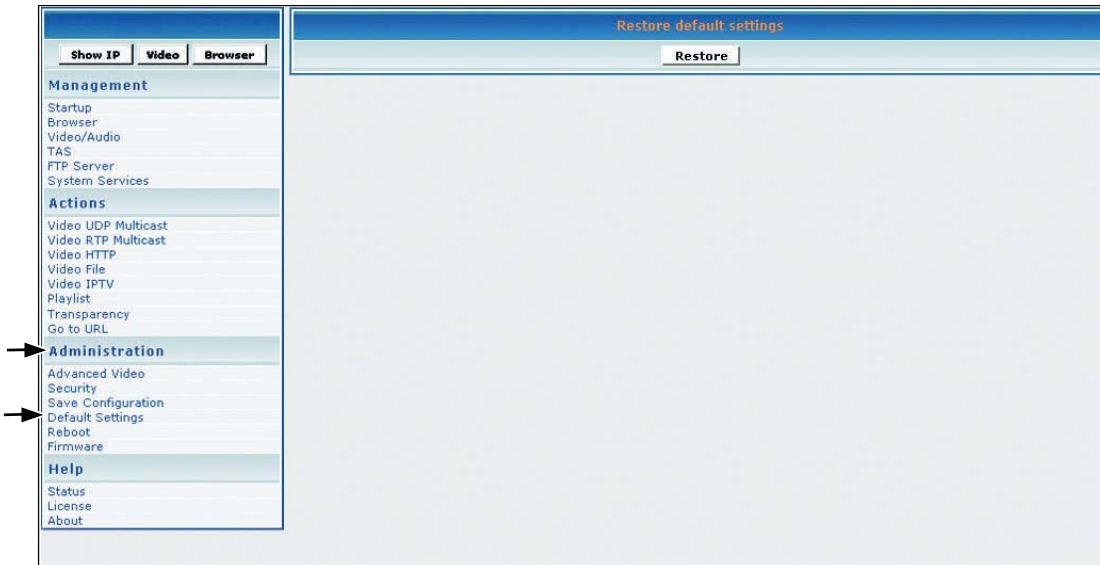


REBOOT

To reboot the **NMP-530**, under **Administration** click **Reboot**. The screen shown below appears. Click **Reboot**. The **NMP-530** reboots.

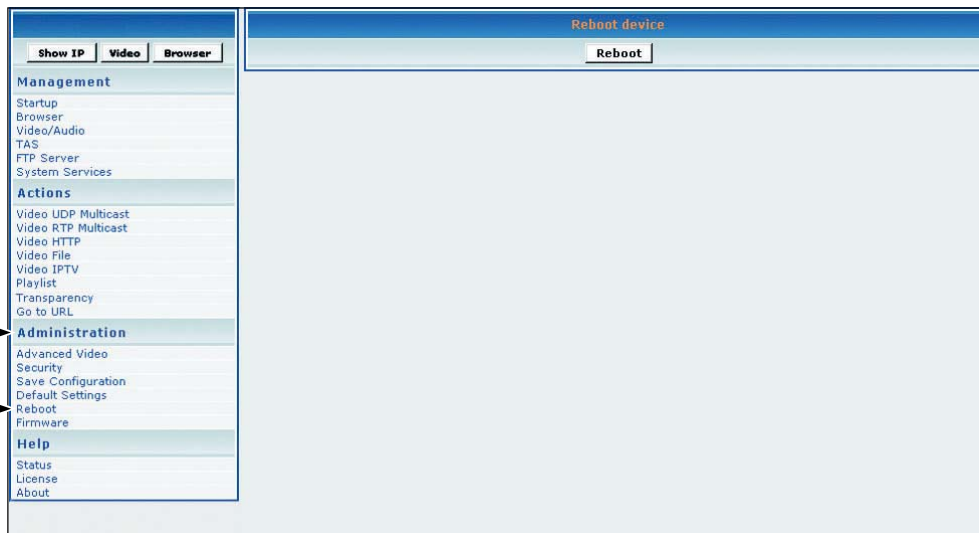

FIRMWARE UPGRADE

To upgrade the firmware on the **NMP-530**, under **Administration** click **Firmware**. The screen shown below appears. Click **Browse** to open the firmware file > click **Start upgrade**.

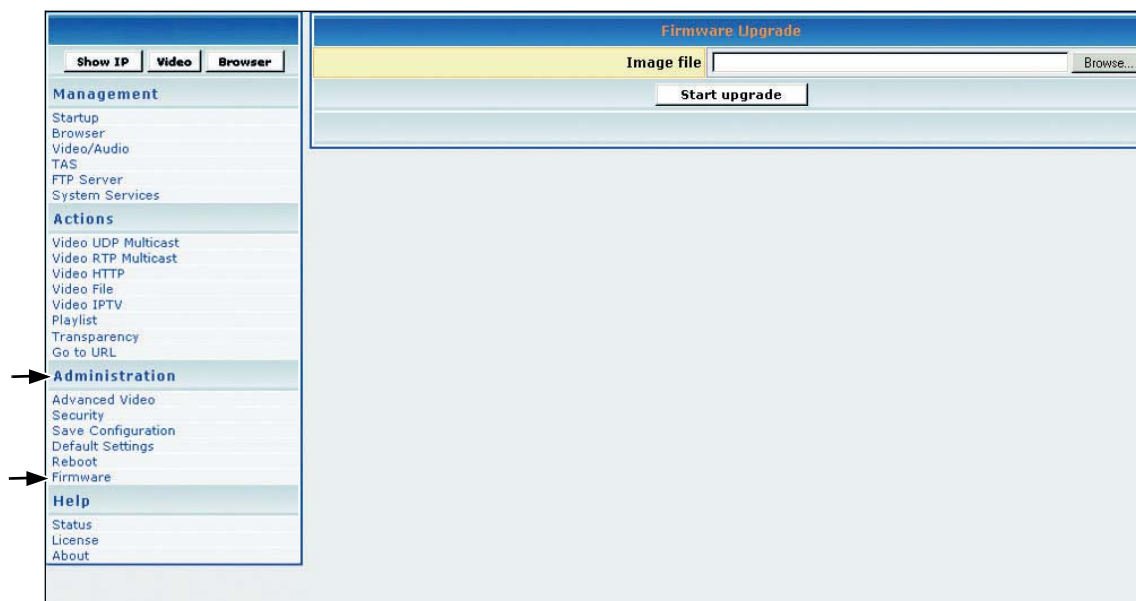

HELP

STATUS

Status refers to the log where you can track activity on a specific **NMP-530**. To show the **Status** log, under **Help** click **Status**. The screen shown below is for information only (no inputs).

The screenshot shows the 'Device status' page of the NMP-530 web interface. The left sidebar has a navigation menu with the following items:


- Management
 - Show IP
 - Video
 - Browser
- Management
 - Startup
 - Browser
 - Video/Audio
 - TAS
 - FTP Server
 - System Services
- Actions
 - Video UDP Multicast
 - Video RTP Multicast
 - Video HTTP
 - Video File
 - Video IPTV
 - Playlist
 - Transparency
 - Go to URL
- Administration
 - Advanced Video
 - Security
 - Save Configuration
 - Default Settings
 - Reboot
 - Firmware
- Help
 - Status
 - License
 - About

The main content area displays the following system parameters and values:

```
init.mount_first T_STRING
init.mounted T_STRING Not found
init.upg_context T_STRING MC upgrade has never been done
init.upg_status T_STRING MC upgrade not active
init.DMT_SCENARIO_TMO T_LONG 0
init.DMT_SCENARIO T_LONG 0
init.VS_video_mode T_STRING no
init.VNC_restart_delay T_LONG 5000
init.VNC_restart T_STRING no
init.VNC_fullscreen T_STRING no
init.VNC_y T_LONG 0
init.VNC_x T_LONG 0
init.VNC_password T_STRING
init.VNC_server T_STRING
init.VNC_ping T_STRING no
init.FTP_password T_STRING admin
init.FTP_username T_STRING admin
init.License_ro T_STRING Y
init.License T_STRING 00F088005B6C983E5347908A1E1D6148
init.DefaultFactorySetup T_STRING SETUP NUMBER_2 NUMBER_9
init.build T_STRING Thu Nov 2 00:23:45 PST 2006
init.model_name T_STRING Piccolo 4312
init.product T_STRING Piccolo 4312
init.version T_STRING 2.41
init.macAddress T_STRING 00:0f:
init.manufactHardware T_STRING
init.manufactVendor T_STRING
init.manufactDate T_STRING
init.lHydraServerPort T_STRING 8080
init.lHydraServerAddress T_STRING 192.168.12.99
init.BigHydraServerAddr T_STRING 64.1.254.116
init.lightHydraMacUpdate T_STRING yes
init.startService_xapp T_STRING no
init.startService_FTP T_STRING yes
```


LICENSE

To activate the license on the **NMP-530**, under **Help** click **License**. The **License Key** may appear automatically in the screen shown below (read-only).

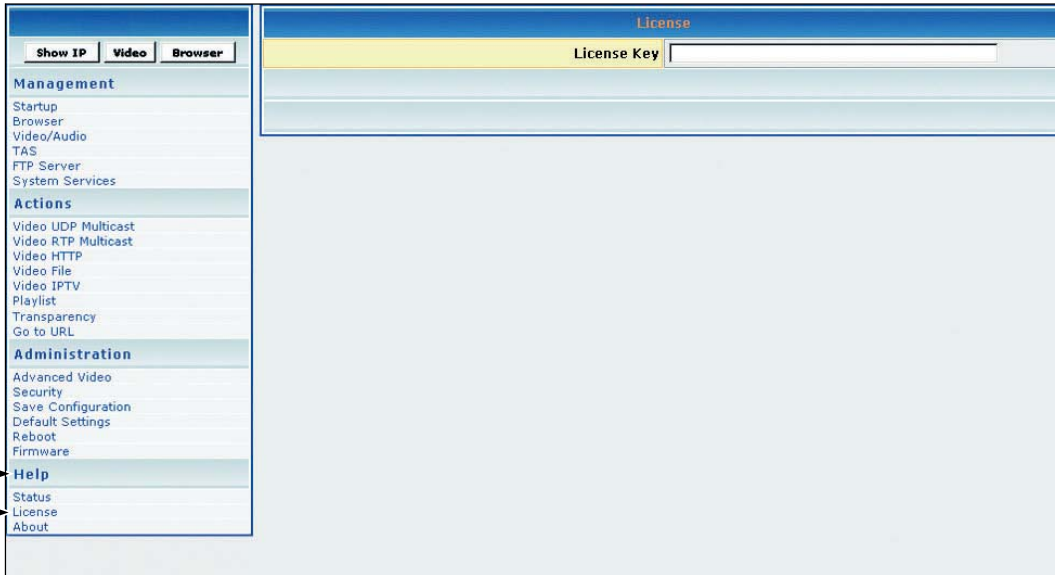

ABOUT

To show the current version of the product, under **Help** click **About**. The screen shown below appears (information only).

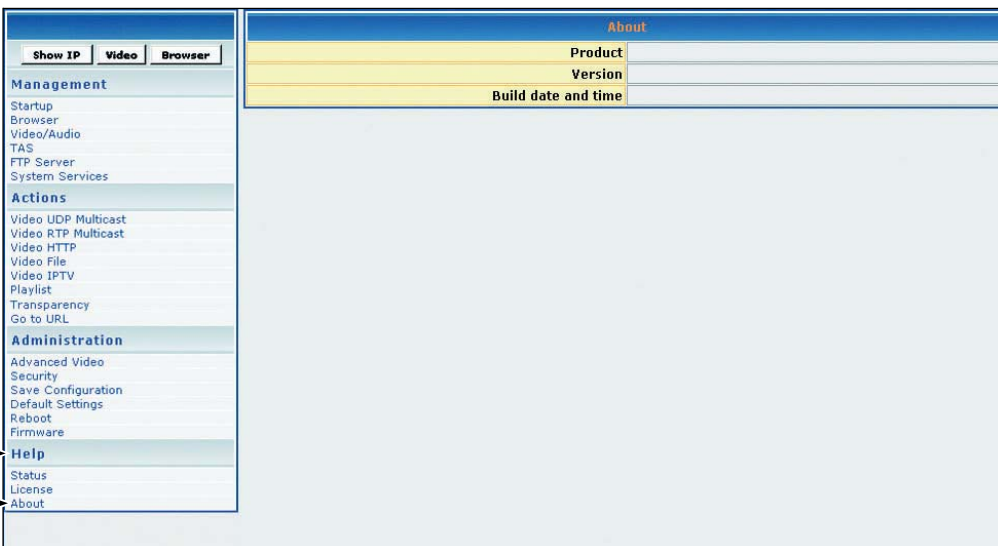

APPENDIX

COMPLIANCE AND SAFETY NOTICES

FCC CLASS B COMPLIANCE NOTICE (UNITED STATES)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at user's own expense.

You can determine whether your equipment is causing interference by turning it off. If the interference stops, it was probably caused by this equipment or one of its peripheral devices. If the equipment causes interference to radio or television reception, try to correct the interference by using one or more of the following measures:

- Turn the television or radio antenna until the interference stops.
- Move the equipment to one side or the other of the television or radio.
- Move the equipment farther away from the television or radio.
- Plug the equipment into an outlet that is on a different circuit from the television or radio. (That is, make certain the equipment and the television or radios are on circuits controlled by different circuit breakers or fuses.)

Modifying the equipment without proper authorization may result in the equipment no longer complying with FCC requirements for Class A or Class B digital devices. In that event, your right to use the equipment may be limited by FCC regulations, and you may be required to correct any interference to radio or television communications at your own expense.

Canadian compliance notice

English: This digital apparatus does not exceed the Canada ICES-003 Class B limits for radio noise emissions from digital apparatus as set out in the radio interference regulations of the Canadian Department of Communications.

French: Le present appareil numerique nemet pas de bruits radioelectriques depassant les limites applicables aux appareils numeriques de Canada ICES-003 Class B prescrites dans le reglement sur le brouillage radioelectrique edicte par le Ministere des Communications du Canada.

European compliance notice

Products with the CE Marking comply with both the EMC Directive (89/336/EEC) and the Low Voltage Directive (73/23/EEC) issued by the Commission of the European Community. Compliance with these directives implies conformity to the following European Norms:



- EN55022 (CISPR 22) Radio Frequency Interference
- EN55024 (IEC61000-4-2, -4-4, -4-5, -4-6, -4-11)
- EN60950 (IEC950) Product Safety

Declaration of RoHS Compliance

This product has been designed and manufactured in compliance with Directive 2002/95/EC of the European Parliament and the Council on restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS Directive) and is deemed to comply with the maximum concentration values issued by the European Technical Adaptation Committee (TAC) as shown below:



Substance	Proposed Maximum Concentration	Actual Concentration
Lead (Pb)	0.1%	< 0.1%
Mercury (Hg)	0.1%	< 0.1%
Cadmium (Cd)	0.01%	< 0.01%
Hexavalent Chromium (Cr ⁶⁺)	0.1%	< 0.1%
Polybrominated biphenyls (PBB)	0.1%	< 0.1%
Polybrominated diphenyl ethers (PBDE)	0.1%	< 0.1%

Certain components of products as stated above are exempted under the Annex of the RoHS Directives as noted below. Examples of exempted components are:

1. Mercury in compact fluorescent lamps not exceeding 5 mg per lamp and in other lamps not specifically mentioned in the Annex of RoHS Directive
2. Lead in glass of cathode ray tubes, electronic components, fluorescent tubes, and electronic ceramic parts (e.g. piezoelectronic devices)
3. Lead in high temperature type solders (i.e. lead-based alloys containing 85% by weight or more lead)
4. Lead as an alloying element in steel containing up to 0.35% lead by weight, aluminium containing up to 0.4% lead by weight and as a copper alloy containing up to 4% lead by weight.

For EU-member states only as follows:

The mark shown to the right is in compliance with the Waste Electrical and Electronic Equipment Directive 2002/96/EC (WEEE). The mark indicates the requirement NOT to dispose the equipment as unsorted municipal waste, but use the return and collection systems according to local law.



Power supply safety notice

The power supply provided with this device is for use with this device only. Replace only with the same or equivalent type power supply as recommended by the manufacturer.

BSMI

(1) This is manufacturer address:

Manufactured by Universal Scientific Industrial Co.,Ltd.

USI Electronics Park, North of High-Tech Industrial Park, NanShan District,
ShenZhen, P.R.C

(2) This is the applicant information:

環隆電氣股份有限公司

南投縣草屯鎮太平路一段 351 巷 141 號

(3) 代理商: 優派國際股份有限公司

台北縣 235 中和市建成路 192 號 9 樓

SCREENS MANAGEMENT

E
N
G
L
I
S
H

Show IP Video Browser
Management Startup Browser Video/Audio TAS FTP Server System Services Actions Video UDP Multicast Video RTP Multicast Video HTTP Video File Video IPTV Playlist Transparency Go to URL Administration Advanced Video Security Save Configuration Default Settings Reboot Firmware Help Status License About

Startup URLs	
Video	
Failover Video	
Browser	http://www.viewsonic.com
Failover Browser	
Number of retries before go to Failover Browser	10
Timeout between retries (milliseconds)	6000

Network Configuration	
MAC address	00:0f:44:00:5b:36
DHCP	Enabled
IP address	192.168.12.30
Subnet mask	255.255.255.0
Default gateway	192.168.12.1
DNS server IP address	192.168.12.1
Apply	

Video/Audio Configuration	
TV mode	HDMI_720p60
Brightness	<input type="text" value="0"/>
Contrast	<input type="text" value="128"/>
Saturation	<input type="text" value="128"/>
Audio Channel Volume (left)	<input type="text" value="0"/>
Audio Channel Volume (right)	<input type="text" value="0"/>
Apply	

FTP Server Configuration	
FTP server username	admin
FTP server password	admin
Apply	

TAS Configuration	
Timeout (sec)	20
IP Address	tas-intranet
Apply	

System Services Configuration	
(port 6666)	Yes
MIB Event Notification	No
FTP Server	Yes
Apply	

ACTIONS

The screenshot displays the 'ACTIONS' menu on the left, which includes sections for Management, Administration, and Help. An arrow points to the 'ACTIONS' section. The main content area shows several configuration panels:

- Video multicast/UDP**: IP address, Port, Start, Stop
- Video RTP Multicast**: IP address, Port, Start, Stop
- Video HTTP**: URL, Start, Stop
- Video File**: Path in local file system, Start, Stop
- Video IPTV**: Video section (IP address, Port) and Audio section (IP address, Port), Start, Stop
- Playlist**: URL, Start, Stop
- Transparency**: Transparency between OSD and video layer. 0-255 (255), Apply
- Go to URL**: URL, Go

ADMINISTRATION

ENGLISH

Show IP | Video | **Browser**

Management

Startup
Browser
Video/Audio
TAS
FTP Server
System Services

Actions

Video UDP Multicast
Video RTP Multicast
Video HTTP
Video File
Video IPTV
Playlist
Transparency
Go to URL

Administration

Advanced Video
Security
Save Configuration
Default Settings
Reboot
Firmware

Help

Status
License
About

Advanced video Configuration

X of destination window

Y of destination window

Width of destination window

Height of destination window

Security Credentials

User name

Password

Repeat password

Save Configuration

Restore default settings

Reboot device

Firmware Upgrade

Image file

HELP

Show IP | Video | **Browser**

Management

Startup
Browser
Video/Audio
TAS
FTP Server
System Services

Actions

Video UDP Multicast
Video RTP Multicast
Video HTTP
Video File
Video IPTV
Playlist
Transparency
Go to URL

Administration

Advanced Video
Security
Save Configuration
Default Settings
Reboot
Firmware

Help

Status
License
About

Device status

```

init.mount_first T_STRING
init.mounted T_STRING Not found
init.upg_context T_STRING MC upgrade has never been done
init.upg_status T_STRING MC upgrade not active
init.DMT_SCENARIO_TH0 T_LONG 0
init.DMT_SCENARIO T_LONG 0
init.VS_video_mode T_STRING no
init.VNC_restart_delay T_LONG 5000
init.VNC_restart T_STRING no
init.VNC_fullscreen T_STRING no
init.VNC_y T_LONG 0
init.VNC_x T_LONG 0
init.VNC_password T_STRING
init.VNC_server T_STRING
init.VNC_ping T_STRING no
init.FTP_password T_STRING admin
init.FTP_username T_STRING admin
init.License_ro T_STRING Y
init.License T_STRING 00F088005B6C983E5347908A1B1D6148
init.DefaultFactorySetup T_STRING SETUP_NUMBER_2_NUMBER_9
init.build T_STRING Thu Nov 2 00:23:45 PST 2006
init.model_name T_STRING Piccolo 4312
init.product T_STRING Piccolo 4312
init.version T_STRING 2.41
init.macAddress T_STRING 00:0E:
init.manufactHardware T_STRING
init.manufactVendor T_STRING
init.manufactDate T_STRING
init.lHydraServerPort T_STRING 8080
init.lHydraServerAddress T_STRING 192.168.12.99
init.BigHydraServerAddr T_STRING 64.1.254.116
init.lightHydraMacUpdate T_STRING yes
init.startService_xapp T_STRING no
init.startService_FTP T_STRING yes
                    
```

License

License Key

About

Product

Version

Build date and time

CUSTOMER SUPPORT

For the nearest ViewSonic® service provider, see the table below or contact your reseller. You will need the product's serial number on-hand when you call.

Country/Region	Website (may have email address also)	Phone Fax
United States	viewsonic.com	Phone: 800-688-6688 Fax: 909-468-1202
Canada	viewsonic.com	Phone: 866-463-4775 Fax: 909-468-5814
United Kingdom	viewsoniceurope.com	Phone: 0800-833-648 Fax: 0179-450-0801
Europe, Middle East, Baltic countries, and North Africa	viewsoniceurope.com	Contact your reseller
Australia and New Zealand	viewsonic.com.au	Phone: 61-2-9929-3955 Fax: 61-2-9929-8393
Singapore/India and Southeast Asia	viewsonic.com.sg	Phone: 65-273-4018 Fax: 65-273-1566
Taiwan	viewsonic.com.tw	Phone: 866-2-2246-3456 Fax: 866-2-8242-3733
Other Asia Pacific countries		Contact your reseller
South Africa	viewsonic.com/asia	Phone: 886-2-2246-3456 Fax: 886-2-8242-3668

SPECIFICATIONS

	Resolution	Hz	HDMI	Component	S-Video/ CVBX
Resolution*	640 x 480	60	X		
		75	X		
	800 x 600	60	X		
		75	X		
	1024 x 768	60	X		
		75	X		
	1280 x 1024	60	X		
		75	X		
	1280 x 768	60	X		
		75	X		
	1360 x 768	60	X		
		75	X		
CEA 480p			X	X	
CEA 720p			X	X	
CEA 1080i			X	X	
NTSC-M					X
Screen Rotation	Landscape, Portrait (+90°, -90°)				
Local Storage	2 GB				
Connectivity	Display:	HDMI, Component, S-Video, Composite			
	Audio Output:	RCA stereo analog			
	Network:	1 x 10/100 Ethernet			
	USB:	1 x USB port for storage only (not for HIB devices)			
	I/O:	RS-232			
Weight	Gross:	1.7 lbs (0.77 kg)			
	Net:	1.0 lb (0.45 kg)			
Power	Input: 100 ~ 240 VAC 50/60 Hz Output: 5 VDC (max.)				
Pre-loaded Software	Web browser with Flash Plug-in, Standalone Flash Player, HD Media Player				
Streaming Protocols (included but not limited to)	HTTP, UDP, RTP, IP/TV, local file playback				
Decoding	Video:	MPEG-1, MPEG-2, MPEG-4, Macromedia® Flash™			
	Audio:	MPEG-1, (layers 1 & 2), MP3, WAV			
Image File Formats	JPEG, PNG				
Scanning Format	SDTV 480i, EDTV 480p, HDTV 720p, 1080i				
Network Management	Web-based, Telnet, ViewSonic Administration Server, TAS, Cisco ACNS supported				
Memory	RAM (128 MB): FLASH (64 MB)				
Flexible Clip Sequencing	Playlist, Schedule, Multicast, Unicast, VOD				
Environmental Conditions	Operating temperature:	10° ~ 40° C (50° ~ 104° F) recommended			
	Humidity	20~85% RH (non-condensing)			
	Storage temperature:	0° ~ 60° C (32° ~ 140° F)			
	Humidity	5 ~ 85% RH (non-condensing)			
Dimensions	7" (W) x 5.1" (H) x 1.6" (D) 178 mm (W) x 130 mm (H) x 41 mm (D)				
Regulatory Approvals	FCC-15B, CE, IC-ES003B, UL/c-UL, CB, BSMI, RoHS				

*X indicates supported resolution. Specifications are subject to change without notice. Corporate names and trademarks stated herein are the property of their respective companies

LIMITED WARRANTY

Please go to the Customer Support table in this guide for the ViewSonic website in your region to get warranty information.



the choice of professionals

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>