

hp e-vecetra

models and accessories

Product Number	Hard Drive	Std. RAM	Multimedia	OS ¹
HP e-Vectra Models with Intel Pentium III Processor, 133 MHz System Bus Speed, and 256 KB Level 2 Cache Memory				
HP e-Vectra 600EB/133-256 (CPL: 04/2000 ▶)				
D9478A	8.4 GB IDE	128 MB	24 × Max Slim IDE CD-ROM	W98
D9898A/T		SDRAM		Win 2000
HP e-Vectra 667/133-256 (CPL: 04/2000 ▶)				
D9899A/T	8.4 GB IDE	256 MB SDRAM	24 × Max Slim IDE CD-ROM	Win 2000
HP e-Vectra 733/133-256 (CPL: 04/2000 ▶)				
P2024A/T/U	8.4 GB IDE	128 MB	24 × Max Slim IDE CD-ROM	Win 2000
P2025A/T		SDRAM		W98
P2706A/T	15 GB IDE	256 MB SDRAM	24 × Max Slim IDE CD-ROM	Win 2000

1. Operating system preloaded on these models, as indicated in the table.



hp e-vectra

1

Product Number	Hard Drive	Std. RAM	Multimedia	OS ¹
HP e-Vectra Models with Intel Celeron Processor, 66 MHz System Bus Speed, and 128 KB Level 2 Cache Memory				
HP e-Vectra 500/66-128 (CPL: 04/2000 ▶)				
D9477A	8.4 GB IDE	64 MB SDRAM	24 × Max Slim IDE CD-ROM	W98
D9896A/T			no	
HP e-Vectra 533/66-128 (CPL: 04/2000 ▶)				
D9897A/T	8.4 GB IDE	128 MB SDRAM	24 × Max Slim IDE CD-ROM	W98
HP e-Vectra 566/66-128 (CPL: 04/2000 ▶)				
P2026A	8.4 GB IDE	64 MB SDRAM	24 × Max Slim IDE CD-ROM	W98
P2027A/T/U	8.4 GB IDE	64 MB SDRAM	no	W98
P2707A/T/U	8.4 GB IDE	128 MB SDRAM	24 × Max Slim IDE CD-ROM	W98
HP e-Vectra 600/66-128 (CPL: 04/2000 ▶)				
P2022A/T	8.4 GB IDE	128 MB SDRAM	24 × Max Slim IDE CD-ROM	W98

1. Operating system preloaded on these models, as indicated in the table.



note

All models have:

- Direct AGP video controller integrated in Intel chipset
- Integrated Crystal CS4299 Audio Codec '97 2.1 compatible stereo audio codec
- Integrated 3Com 3C905C-TX network controller.

supported accessories**Documentation**

HP Information CD-ROM

5011-8109

To order your HP Information CD-ROM from HP's Web:

- 1 Go to www.hp.com/go/e-pcsupport, then select **Manuals**
- 2 Select your product, then select **HP Information CD-ROM**

Input Devices

HP Standard Keyboard	C4735A
HP Multimedia Keyboard	C4742A
HP 2-button Mouse	C3751B
HP Scrolling Mouse	C4736A
HP Cordless Scrolling Mouse	C4740A

Monitors

All current HP Monitors (see the *HP Monitors Service Handbook*)

Mass Storage

HP USB Floppy Drive	D9510A
---------------------	--------

Multimedia

HP Amplified Speakers - by Labtec 10WRMS	D4545A
HP Amplified Speakers - by Labtec 4WRMS	D6861A
HP Standard Headset	D8387A

Data Communications and LAN Adapter Boards

HP 56K V90 USB External Modem	D8384B
-------------------------------	--------

Security

HP Master Pass Key System Kit	D6655B
HP Spare Master Pass Key	D6658B
HP ProtectTools Smart Card Reader Kit	D8436B
Kensington Lock	F1645A



hp e-vectra

I/O Interfaces

HP USB Hub Accessory Kit

D6804A

Others


Monitor Stand

F1453A



system board, BIOS, and memory

Processor: Intel Pentium III or Intel Celeron PPGA package with Zero Insertion Force (ZIF) socket.

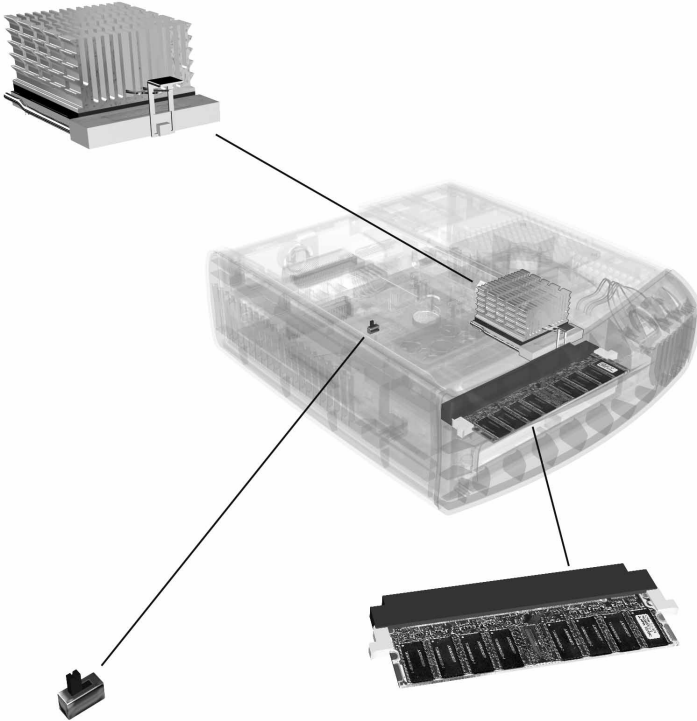

SW1

System Board Switch:
See the table on the next page.

Main Memory:
One DIMM socket which supports up to a maximum of 256 MB.
Install one 64 MB, 128 MB or 256 MB SDRAM module.



hp e-vecetra

system board switches

SW1

Switch	Function	Default
On	Clears CMOS (to reload the <i>Setup</i> program defaults) and passwords	Off
Off	Normal operation	











BIOS history

For the latest BIOS, the flasher utility program, and the BIOS history refer to the HP World Wide Web site.

<http://www.hp.com/go/e-pcsupport>



part numbers

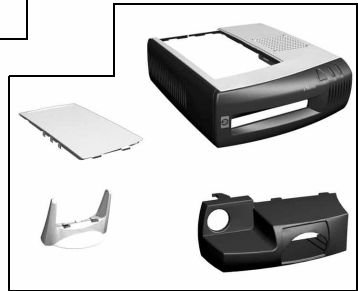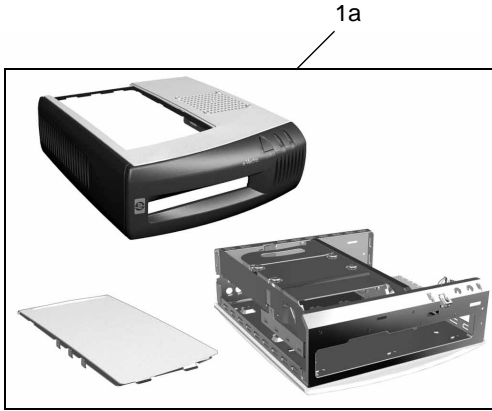

hp e-vecetra

“return to hp” repair parts list for hp e-vecetra

Item	Description	Repl. Part Number	Exchange Part Number
1a	Box assembly: includes cover assembly, chassis assembly, HDD tray assembly, HDD compartment cover, LED holder assembly)	5065-2565	—
2	Cable kit: includes HDD data cable, HDD power cable and CD-ROM (data + power) cable	5065-2513	—
3	Plastic parts kit: includes cover, HDD compartment cover, stand foot, rubber feet (not shown), port control system, blank serial number label (not shown) and flyer (not shown)	5065-2560	—
4	Status panel, fan and airflow guide	5065-2511	—
5	CD-ROM blank bezel and RFI shield (used on models without CD-ROM drive)	5065-2561	—
6	Power supply	0950-3796 ¹	—
7	Power cord	8120-xxxx ^{1,2}	—
8	IDE hard disk drive ³ (includes HDD tray)		
	8.4 GB	—	D9618-69001
	15 GB	—	D9616-69001
9	24X Max IDE slim CD-ROM drive + tray assembly	D9912-63001	—
10	Enhanced mouse with scroll/zoom wheel	C4736-60101	—
	Standard keyboard	C4739-601xx ⁴	—
11	HP lock	5064-2645	—
12	Battery type CR2032	1420-0356	—
13	System board	D9896-63005	D9896-69005
not shown	Sealing tape		—
not shown	24X Max IDE slim CD-ROM drive + adapter board	D9900-60025	—
not shown	IDE hard disk drive		
	Quantum LCT10 8.4 GB	D6845-63001	D6845-69001
	Maxtor Draco 15 GB	D9812-63001	D9812-69001

1. Replace both the power supply and the power cord.
2. Where “xxxx” is the code for your national power cord. See the localization matrix below.
3. For optional disk drive information, see the *Accessory Service Handbook*.
4. Where “xx” is the code for your national keyboard. See the localization matrix below.



“on-site” repair parts list for hp e-vecetra

Item	Description	Repl. Part Number	Exchange Part Number
1b	Box assembly: includes system board, cable kit, chassis assembly, HDD insulator, stiffener, CD-ROM drive support, stand off fix, stand off, RFI shields, lock, left panel assembly, rear bezel connector label, LED holder assembly	—	D9619-69001
2	Cable kit: includes HDD data cable, HDD power cable and CD-ROM (data + power) cable	5065-2513	—
3	Plastic parts kit: includes cover, HDD compartment cover, stand foot, rubber feet (not shown), port control system, blank serial number label (not shown) and flyer (not shown)	5065-2560	—
4	Status panel, fan and airflow guide	5065-2511	—
5	CD-ROM blank bezel and RFI shield (used on models without CD-ROM drive)	5065-2561	—
6	Power supply	0950-3796 ¹	—
7	Power cord	8120-xxxx ^{1,2}	—
8	IDE hard disk drive ³ (includes HDD tray)		
	8.4 GB	—	D9618-69001
	15 GB	—	D9616-69001
9	24X Max IDE slim CD-ROM drive + tray assembly	D9912-63001	—
10	Enhanced mouse with scroll/zoom wheel	C4736-60101	—
	Standard keyboard	C4739-601xx ⁴	—
11	HP lock	5064-2645	—
12	Battery type CR2032	1420-0356	—

1. Replace both the power supply and the power cord.
2. Where “xxxx” is the code for your national power cord. See the localization matrix below.
3. For optional disk drive information, see the *Accessory Service Handbook*.
4. Where “xx” is the code for your national keyboard. See the localization matrix below.



hp e-vecetra

localization matrix for hp e-vecetra

Localization	Country	Keyboard	Power Cord
#AB4	Singapore - Malaysia	C4739-60101	8120-8699
#ABA	USA		8120-6313
#ABC	Canada	C4739-60102	
#ABD	Germany	C4739-60103	8120-6314
#ABF	France	C4739-60105	
#ABG	Australia - New Zealand	C4739-60101	8120-6312
#ABH	Netherlands	C4739-60142	8120-6314
#ABJ	Japan	C4739-60124	8120-6316
#ABU	United Kingdom	C4739-60113	8120-8699
#ABU	Italy	C4739-60117	8120-6314
#ABU	India	C4739-60101	8120-6317

system board parts list for hp e-vecetra

Description	Repl. Part Number	Exchange Part Number
Processors (PPGA package):		
Intel Celeron 500/66 128KB L2 cache	5065-0477	—
Heatsink and clip for Intel Celeron 500 & 533	5065-2564	—
Intel Celeron 533/66 128KB L2 cache	D8748-63001	—
Intel Celeron 566/66 128KB L2 cache	D9903-63001	—
Intel Pentium III 600EB/133 256KB L2 cache	—	D9918-69001
Intel Pentium III 667B/133 256KB L2 cache	—	D9905-69001
Intel Pentium III 733B/133 256KB L2 cache	—	D9906-69001
Heatsink and clip for Celeron 566 and Pentium III processors	5065-2563	—
Main memory modules:		
1 X 64-MB non-ECC SDRAM	D6502-63001	—
1 X 128-MB non-ECC SDRAM	D6503-63001	—
1 X 256-MB non-ECC SDRAM	D9525-63001	—



software recovery cd-roms

<i>HP Image Creation & Recovery CD-ROM for Windows 2000/NT</i>	5970-0370-xx ¹
<i>HP Image Creation & Recovery CD-ROM for Windows 98</i>	5970-0400-xx ¹
<i>HP Image Library & Diagnostics CD-ROM for Windows 98</i>	5970-4350 ²
	5970-4351 ³
	5970-4352 ⁴
<i>HP Image Library & Diagnostics CD-ROM for Windows 2000</i>	5970-4353 ³
	5970-4354 ²
	5970-4355 ³
	5970-4356 ⁴

1. Where "xx" is the code for your language: EN=English, FR=French, GR=German, JP=Japanese.
2. Singapore-Malaysia, USA English, Australia, UK, India English, South Africa,
3. China, Hong-Kong, Portugal, Canada French, Germany, Spain, France, Netherlands, Latin America Spanish, Norway, Switzerland French, Switzerland German, Belgium Flemish, Denmark, Italy, Argentina Spanish, Latin America English, Thailand, South America Spanish.
4. Taiwan, Korea, Japan, Sweden, Finland, Russia.

manuals and documentation for hp e-vecetra

<i>HP Information CD-ROM</i>	5011-8109
<i>User's Guide</i>	5970-5060 ²
<i>Technical Reference Manual</i>	no number ³

- 1 The *HP Information CD-ROM* contains complete information for the HP e-pc. To order your *HP Information CD-ROM* from HP's Web, go to www.hp.com/go/e-pcsupport, then select **Manuals**
- 2 Select your product, then select **HP Information CD-ROM**
- 3 Electronic file available on HP's Web site.

notes:



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>