

IBM System x3650 M3

IBM Redbooks Product Guide

The IBM® System x3650 M3 provides outstanding performance for your mission-critical applications. Its energy-efficient design supports more cores, memory, and data capacity in a scalable 2U package that is easy to service and manage. With more computing power per watt and the latest Intel Xeon processors, you can reduce costs while maintaining speed and availability.

Suggested uses: customers requiring a highly available, energy-efficient, rack-optimized solution for physical and virtual intensive commercial environments like eBusiness/eCommerce, collaboration, virtualization, database, and enterprise resource planning applications.

Figure 1 shows the IBM System x3650 M3.



Figure 1. The IBM System x3650 M3

Did you know?

The x3650 M3 offers a flexible, scalable design and simple upgrade path to 16 HDDs or SSDs plus an optical drive, and up to 288 GB of memory. In addition, a built-in altimeter provides more efficient power utilization and lower noise levels. Comprehensive systems management tools such as advanced diagnostics, a cable management arm, and the ability to control resources from a single point make it easy to deploy, integrate, service, and manage.

Key features

The challenge of a high-performance business is to do more with less—serve more Web pages, handle more secure connections, support more email users. You need to reduce the costs of doing business and improve the service you deliver to your customers while lowering your overall risk. The dual-socket IBM System x3650 M3 can reduce your costs with its new energy-smart design. It can improve service with reduced operational complexity and increased management functionality. It will lower your IT risk with the resiliency that comes from having no single point of failure. And like all IBM servers, the x3650 M3 offers you the trust that comes from IBM global reach, service, and support.

The x3650 M3 is a high-performance rack server that uses significantly less power than previous generations, with unified systems management tools, leading reliability, availability, and serviceability features, and broad system flexibility, housed in a compact 2U mechanical package.

Performance

The x3650 M3 offers numerous features to boost performance and reduce costs:

- Up to two 6-core Xeon 5600 series processors offering superior performance. Xeon 5600 series processors offer up to 54% better performance than the previous generation 5500 series processors (workload dependent).
- Eighteen DIMMs of registered 1333 MHz DDR3 ECC memory provide speed, high availability, and a memory capacity of up to 288 GB.
- High-performance 6 Gbps SAS RAID controllers and 15K RPM 6 Gbps SAS disk drives in a variety of capacities to suit your local storage requirements.
- The use of solid-state drives (SSDs) instead of or along with traditional spinning drives (HDDs) can significantly improve I/O performance. An SSD can support 20,000 I/O operations per second (IOPS) whereas a typical HDD handles fewer than 500 IOPS.

Flexibility and scalability

The x3650 M3 has the ability to grow with your application requirements with these features:

- A choice of 4-core or 6-core processors with clock rates from 1.6 GHz to 3.6 GHz.
- 18 DIMM sockets allowing memory expansion of up to 288 GB.
- A choice of power supplies including 460 W, 675 W AC or DC, or energy-efficient 675 W.
- Five or six USB 2.0 ports available - two front, two rear, one internal for an embedded hypervisor, plus one additional internal port when the optional Tape Enablement Kit is installed.
- Storage bay flexibility: Up to 16 hot-swap 2.5" drive bays for SAS or SATA HDDs, or solid-state drives (intermixing supported); or eight 2.5" bays plus an internal tape drive bay.
- Direct-attach SAS storage with the EXP2512, EXP2524, and EXP3000 storage enclosures is supported. IBM System Storage servers, including network-attached storage (NAS), and iSCSI or Fibre Channel-attached storage, can also be attached.
- The x3650 M3 provides four PCI Express (PCIe) 2.0 x8 I/O slots for increased network or storage connectivity.

Manageability and security

Powerful systems management features simplify local and remote management of the x3650 M3:

- The x3650 M3 includes an Integrated Management Module (IMM) to monitor server availability, perform Predictive Failure Analysis, and trigger IBM Systems Director alerts.

- An optional Virtual Media Key enables additional systems management capabilities, including web-based out-of-band remote control (keyboard video and mouse), remote optical drive support, Windows “blue screen” error capture, and support for LDAP and SSL protocols.
- Text Console Redirection support allows the administrator to remotely view x3650 M3 text messages over Serial or LAN connections.
- Integrated industry-standard Unified Extensible Firmware Interface (UEFI) next-generation BIOS. New capabilities include:
 - Human readable event logs – no more beep codes
 - Complete out-of-band coverage by the Advance Settings Utility to simplify remote setup
 - A complete setup solution, allowing adapter configuration functions to be moved into UEFI
 - Consistent firmware management across an entire product line
- Integrated Trusted Platform Module (TPM) 1.2 support.
- Industry-standard AES NI support for faster, stronger encryption.
- Integrated IPMI 2.0 support alerts IBM Systems Director to anomalous environmental factors, such as voltage and thermal conditions. It also supports highly secure remote power control using data encryption.
- IBM Systems Director is included for proactive systems management. IBM Systems Director comes with a portfolio of tools, including IBM Systems Director Active Energy Manager, IBM Service and Support Manager, and others. IBM Systems Director also offers extended systems management tools for additional server management and increased availability. When a problem is encountered, IBM Systems Director can issue administrator alerts via email, pager, and other methods.
- IBM Systems Director Active Energy Manager provides advanced power management features with actual real-time energy monitoring, reporting, and capping features.

Availability and serviceability

The System x3650 M3 provides many features to simplify serviceability and increase system uptime:

- The x3650 M3 servers offer Chipkill ECC memory protection (when using x4 DIMMs). Chipkill memory is up to 16 times better than standard ECC memory at correcting memory errors. This can help reduce downtime caused by memory errors.
- The x3650 M3 offers memory mirroring for redundancy in the event of a non-correctable memory failure.
- Toolless cover removal provides easy access to upgrades and serviceable parts, such as HDDs and memory. Similarly, the Virtual Media Key and the ServeRAID controller can be installed and replaced without tools. This means less time (and therefore less money) spent servicing the x3650 M3.
- The server offers hot-swap and redundant fan modules and power supplies and hot-swap disk drives (redundant when implemented in conjunction with a RAID controller). These features mean greater system uptime.
- Toolless slides ship with the server, together with a cable management arm (CMA), that allow the rack server to easily slide into place.
- The drop-down light path diagnostics panel and individual light path LEDs quickly lead the technician to failed (or failing) components. This simplifies servicing, speeds up problem resolution, and helps improve system availability.
- Solid-state drives (SSDs) offer 2.5 times the MTBF rate (2,500,000 hrs) of HDDs, for greater uptime.
- The three-year (parts and labor) limited onsite warranty provides peace of mind and greater investment protection than a one-year warranty does.

Energy efficiency

The System x3650 M3 has an energy-efficient design with features including the following:

- Low-voltage processors draw less energy and produce less waste heat than high-voltage processors, thus helping to reduce data center energy costs. Available 4-core Xeon 5600 series processors use only 40 W and 6-core processors consume as little as 60 W.
- Optional solid-state drives (SSDs) use only 2 W of power per drive, compared to 9 - 10 W for 2.5-inch HDDs. This is as much as 80% less power than a 2.5-inch HDD would use, with a corresponding reduction in heat output that further improves the overall bottom line.
- Support for 1.35 V low-voltage DDR3 memory DIMMs that consume 20% less energy.
- Energy-efficient components, including low-voltage transistors and voltage regulator modules, and power supplies that are up to 90% efficient.
- The x3650 M3 uses hexagonal ventilation holes in the chassis. Hexagonal holes can be grouped more densely than round holes, providing more efficient airflow through the system chassis. This ultimately results in reduced operational costs.
- An altimeter works in conjunction with the IMM to govern fan rotation based on the readings that it delivers. This saves money under normal conditions because the fans do not have to spin at high speed.

Locations of key components and connectors

Figure 2 shows the front of the server.

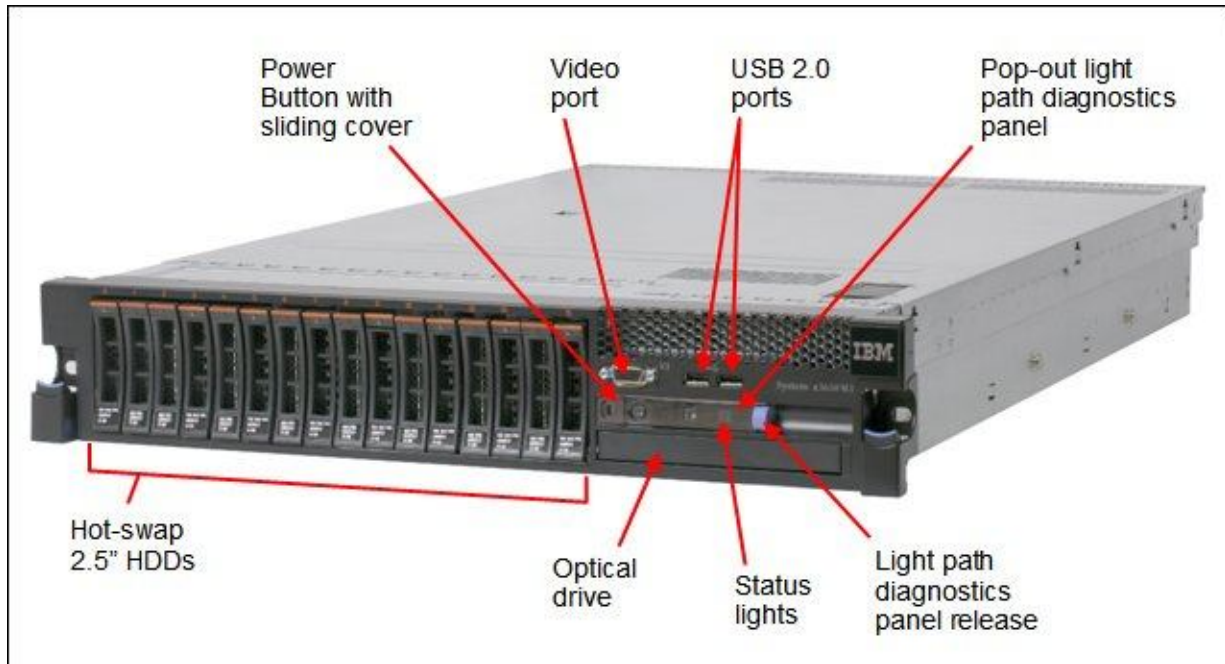


Figure 2. Front view of the IBM System x3650 M3

Figure 3 shows the rear of the server.

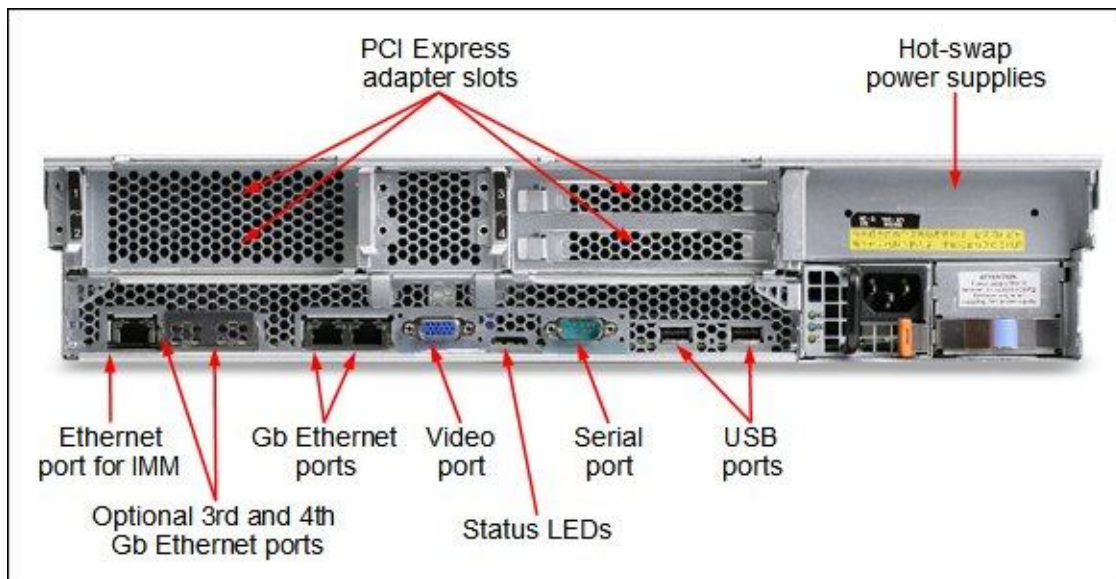


Figure 3. Rear view of the IBM System x3650 M3

Figure 4 shows the locations of key components inside the server.

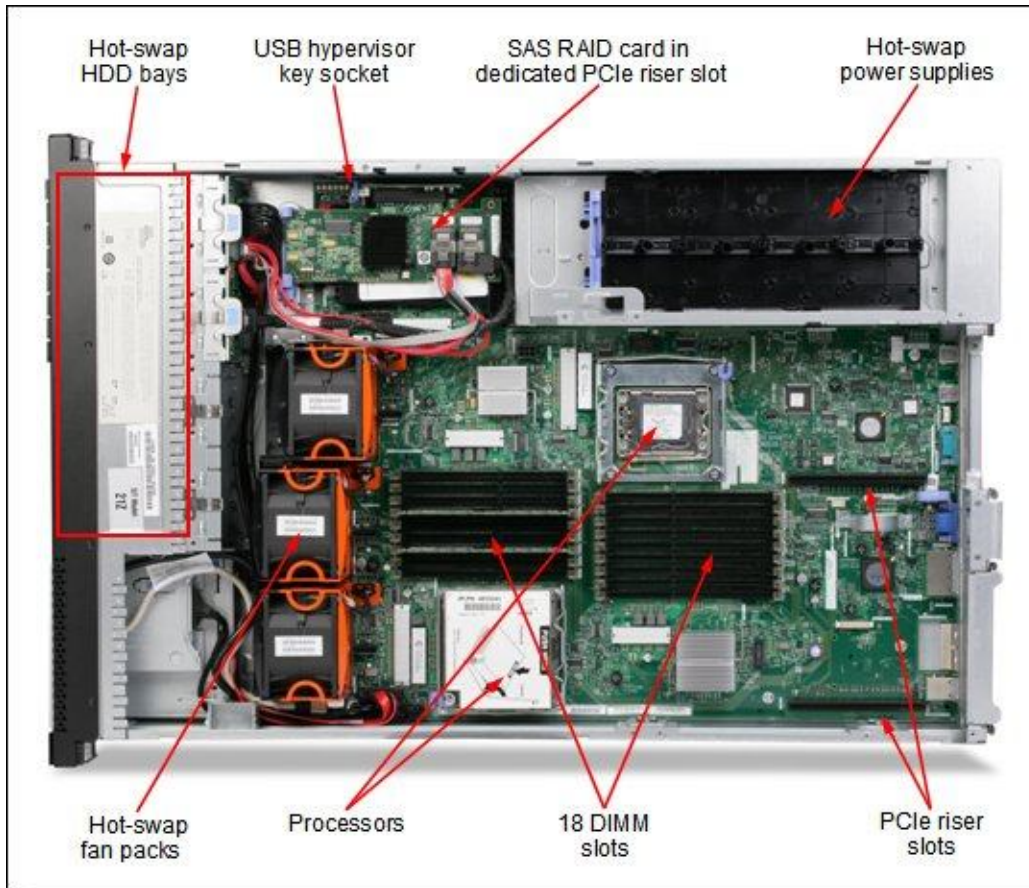


Figure 4. Inside view of the IBM System x3650 M3

Standard specifications

The following table lists the standard specifications.

Table 1. Standard specifications (part 1)

| Components | Specification |
|--------------------------|--|
| Form factor | 2U Rack. |
| Processor | Up to two six-core (up to 3.46 GHz) or quad-core (up to 3.6 GHz) Intel Xeon 5600 series processors with QuickPath Interconnect technology up to 6.4 GT/s, and up to 1333 MHz memory speed. Also supports the Intel Xeon X5698 4.4 GHz dual-core processor. Supports specific Quad-core and Dual-core Intel Xeon 5500 series processors via Configure-To-Order (CTO). |
| Memory cache | Up to 12 MB L3 for Xeon 5600 processors. Up to 8 MB L3 for Xeon 5500 processors. |
| Chipset | Intel 5520. |
| Memory | Up to 18 DIMM sockets (9 DIMMs per processor). Up to 288 GB with 16 GB DDR3 RDIMMs and 18 populated DIMM slots (up to 144 GB with 9 DIMMs per processor), or up to 48 GB with 4 GB DDR3 UDIMMs and 12 populated DIMM slots (up to 24 GB with 6 DIMMs per processor). |
| Memory protection | ECC, ChipKill (for x4-based memory DIMMs), memory mirroring, and memory sparing. |
| Disk drive bays | Up to 16 2.5" hot-swap SAS/SATA HDDs or solid-state drives. |
| Maximum internal storage | Up to 14.4 TB with 900 GB SAS HDDs, or up to 16.0 TB with 1 TB SATA HDDs, or up to 3.2 TB with 200 GB SSD HDDs. Intermix of SAS/SATA/SSD is supported. |
| RAID support | RAID 0, 1, 1E with ServeRAID-BR10i v2 or M1015; RAID 0, 1, 5, 10, 50 with M5014 or M5015. Optional upgrade to RAID 5 is available for M1015. Optional upgrade to RAID 6, 60 is available for M5014/M5015. |
| Optical drive bays | One, support for DVD-ROM or Multiburner. Separate bay. |
| Tape drive bays | Optional Tape Enablement Kit is available to support one DDS5, DDS6, or RDX internal tape drive. If used, the maximum number of HDD bays is limited to 8. |
| Network interfaces | Integrated 2 ports, plus 2 ports on optional Gigabit Ethernet with Ethernet Daughter Card (does not consume PCIe slot). |
| PCI Expansion slots | Up to 5 (up to 4 available, one slot is dedicated to RAID controller), dependant on the riser cards used (three different riser cards are available: 2x PCI-E x8 Gen 2, 1x PCI-E x16 Gen 2, and 2x PCI-X 64 bit/133 MHz). Up to two riser cards are supported. |
| External ports | Two USB 2.0 and one DB-15 video on front. Two USB 2.0, one DB-15 video, one DB-9 serial, one RJ-45 systems management, up to 4 RJ-45 network ports (2 standard, 2 optional) on rear. One internal USB port for embedded hypervisor. |
| Cooling | IBM Calibrated Vectored Cooling™ with 3 counter-rotating hot swap fans with N+1 redundancy. Altimeter is to control fan speed based on atmospheric pressure. |
| Power supply | Up to 2 redundant hot-swap 460 W AC or 675 W AC or 675 W high-efficiency (HE) AC power supplies with 90%+ efficiency. 675 W -48 V DC models are available via CTO. |
| Hot-swap components | Hard drives, power supplies, fans. |

Table 1. Standard specifications (part 2)

| Components | Specification |
|-----------------------------|--|
| Systems management | UEFI, IBM Integrated Management Module (IMM), Predictive Failure Analysis, Light Path Diagnostics, Automatic Server Restart, IBM Systems Director* and IBM Systems Director Active Energy Manager™, IBM ServerGuide. Optional Virtual Media Key for remote presence (graphics, keyboard and mouse, virtual media). |
| Security features | Power-on password, administrator's password, Trusted Platform Module (TPM) |
| Video | Matrox G200eV with 16 MB memory integrated into the IMM. Maximum resolution is 1280x1024 at 75 Hz with 16M colors. |
| Operating systems supported | Microsoft Windows Server 2008 R2 and 2008, Red Hat Enterprise Linux 5 and 6, SUSE Linux Enterprise Server 10 and 11, VMware ESX 4.1 and VMware ESXi 4.1 embedded hypervisor, Sun Solaris 10. |
| Limited warranty | 3-year customer-replaceable unit and onsite limited warranty with 9x5/next business day response time. |
| Service and support | Optional service upgrades are available through IBM ServicePacs®: 4-hour or 2-hour response time, 8 hours fix time, 1-year or 2-year warranty extension, remote technical support for IBM hardware and selected IBM and third-party (Microsoft, Linux, VMware) software. |

* Effective October 12, 2012, or until supply is depleted, IBM will discontinue the shipment of IBM Systems Director DVDs with IBM System x servers and IBM BladeCenter chassis. IBM Systems Director Express Edition and IBM Systems Director Standard Edition, which include software subscription and support, continue to be available for IBM System x servers and IBM Blade Centers.

The x3650 M3 servers are shipped with the following items:

- Statement of Limited Warranty
- Important Notices
- Rack Installation Instructions
- Documentation CD that contains the *Installation and User's Guide*
- IBM Gen 2 Slides Kit
- IBM Gen 2 Cable Management Arm (CMA)
- 2.8 m C13-C14 power cord (one for models with one power supply and two for models with two power supplies)

Standard models

The following table lists the standard models.

Table 2. Standard models

| Model | Processor* (2 maximum) | Memory | RAID controller | Disk bays (std / max) | Disks | Network | Optical | Power supply |
|--------------------------------|---|---------|--------------------|--------------------------|-------|---------|----------|--------------|
| Models announced February 2011 | | | | | | | | |
| 7945-12x | 1x Xeon E5603 1.60 GHz 4C, 4 MB, 1066 MHz | 1x 4 GB | BR10il v2 | 4 / 16 | Open | 2x GbE | Optional | 1x 460 W |
| 7945-22x | 1x Xeon E5606 2.13 GHz 4C, 8 MB, 1066 MHz | 1x 4 GB | M1015 | 8 / 16 | Open | 2x GbE | Optional | 1x 460 W |
| 7945-32x | 1x Xeon E5607 2.26 GHz 4C, 8 MB, 1066 MHz | 1x 4 GB | M1015 | 8 / 16 | Open | 2x GbE | Optional | 1x 460 W |
| 7945-D2Y | 1x Xeon E5620 2.40GHz 4C, 12MB, 1066MHz | 1x 4 GB | | 16 / 16 | Open | 2x GbE | Optional | 1x 80 W |
| 7945-D4x | 1x Xeon E5620 2.40 GHz 4C, 12 MB, 1066 MHz | 1x 4 GB | M1015 | 8 / 16 | Open | 2x GbE | Optional | 1x 460 W |
| 7945-H4x | 1x Xeon L5640 2.26 GHz 6C, 12 MB, 1333 MHz | 1x 4 GB | M5015 + Battery | 8 / 16 | Open | 2x GbE | Optional | 1x 460 W |
| 7945-52x | 1x Xeon E5645 2.40 GHz 6C, 12 MB, 1333 MHz | 1x 4 GB | M5014 | 8 / 16 | Open | 2x GbE | Optional | 1x 460 W |
| 7945-54x | 2x Xeon E5645 2.40 GHz 6C, 12 MB, 1333 MHz | 2x 4 GB | M5014 | 8 / 16 | Open | 2x GbE | Optional | 2x 675 W HE |
| 7945-62x | 1x Xeon E5649 2.53 GHz 6C, 12 MB, 1333 MHz | 1x 4 GB | M5014 | 8 / 16 | Open | 2x GbE | Optional | 1x 460 W |
| 7945-J4x | 1x Xeon X5650 2.66 GHz 6C, 12 MB, 1333 MHz | 1x 4 GB | M5015 + Battery | 8 / 16 | Open | 2x GbE | Optional | 1x 675 W |
| 7945-L4x | 1x Xeon X5660 2.80 GHz 6C, 12 MB, 1333 MHz | 1x 4 GB | M5015 + Battery | 8 / 16 | Open | 2x GbE | Optional | 1x 675 W |
| 7945-72x | 1x Xeon X5675 3.06 GHz 6C, 12 MB, 1333 MHz | 1x 4 GB | M5015 + Battery | 8 / 16 | Open | 2x GbE | Optional | 1x 675 W HE |
| 7945-82x | 1x Xeon X5690 3.46 GHz 6C, 12 MB, 1333 MHz | 1x 4 GB | M5015 + Battery | 8 / 16 | Open | 2x GbE | Optional | 1x 675 W HE |

* Processor detail: Processor quantity and model, core speed, number of cores, L3 cache, memory speed.

Refer to the Specifications section for information about standard features of the server.

Standard models with SAP Preloaded

The following table lists the models that include SAP Discovery System v4 preloaded with SUSE Linux ES SAP Business All-in-one.

Table 3. Standard preload models

| Model | Processor* (2 maximum) | Memory | RAID adapter | Disk bays (std / max) | Disks | Network | Optical | Power supply |
|-----------|---------------------------|---------|--------------------|--------------------------|-----------------------------------|---------|-------------|-----------------|
| 7945-JSx† | 2x Xeon X5650 | 6x 4 GB | M5015 + Battery | 8 / 16 | 7x 300 GB SAS + 1x 500 GB SATA | 2x GbE | Multiburner | 2x 675 W |
| 7945-J6x† | 2x Xeon X5650 | 6x 4 GB | M5015 + Battery | 8 / 16 | 7x 300 GB SAS + 1x 500 GB SATA | 2x GbE | Multiburner | 2x 675 W HE |
| 7945-JCx† | 2x Xeon X5650 | 6x 4 GB | M5015 + Battery | 8 / 16 | 7x 300 GB SAS + 1x 500 GB SATA | 2x GbE | Multiburner | 2x 675 W HE |

* Processor detail: Processor quantity and model, core speed, number of cores, L3 cache, memory speed.

† Models include SAP Discovery System v4 preloaded with SUSE Linux ES SAP Business All-in-one.

Refer to the Specifications section for information about standard features of the server.

Express Models

Table 4. Express models

| Region / model | Processor* (2 maximum) | Memory | RAID controller | Disk bays (std / max) | Disks | Network | Optical | Power supply |
|----------------|---|---------|--------------------|-----------------------|-----------|---------|--------------|--------------|
| NA | | | | | | | | |
| 7945-E7U | 2x Xeon X5675 3.06 GHz 6C 12 MB 1333 MHz | 6x 4 GB | M5015 + Battery | 8 / 16 | Optional | 2x GbE | Multi-burner | 2x 675 W |
| 7945-E8U | 1x Xeon E5649 2.53GHz 6C 12MB 1333MHz | 3x 4 GB | M5015 + Battery | 8 / 16 | Optional | 2x GbE | Multi-burner | 2x 460 W |
| LA | | | | | | | | |
| 7945-E7Ux | 2x Xeon X5675 3.06 GHz 6C 12 MB 1333 MHz | 6x 4 GB | M5015 + Battery | 8 / 16 | Optional | 2x GbE | Multi-burner | 2x 675 W |
| 7945-E8U | 1x Xeon E5649 2.53 GHz 6C 12 MB 1333 MHz | 3x 4 GB | M5015 | 16 / 16 | Optional | 2x GbE | Multi-burner | 1x 460 W |
| 7945-EAU | 1x Xeon E5645 2.40 GHz 6C, 12 MB, 1333 MHz | 1x 4 GB | M1015 | 8 / 16 | 1x 146 GB | 2x GbE | Multi-burner | 1x 460 W |
| 7945-EBU | 1x Xeon E5649 2.53 GHz 6C 12 MB 1333 MHz | 2x 8 GB | M5014 | 16 / 16 | 1x 300 GB | 2x GbE | Multi-burner | 2x 460 W |
| 7945-D4U | 1x Xeon E5620 2.40 GHz 4C 12 MB 1066 MHz | 1x 4 GB | M1015 | 8 / 16 | Optional | 2x GbE | Multi-burner | 1x 460 W |
| 7945-J4U | 1x Xeon X5650 2.66 GHz 6C 12 MB 1333 MHz | 1x 4 GB | M5015 | 8 / 16 | Optional | 2x GbE | Multi-burner | 1x 675 W |
| 7945-54U | 2x Xeon E5645 2.40 GHz 6C, 12 MB, 1333 MHz | 2x 4 GB | M5014 | 8 / 16 | Optional | 2x GbE | Multi-burner | 2x 675 W |
| 7945-52U | 1x Xeon E5645 2.40 GHz 6C, 12 MB, 1333 MHz | 1x 4 GB | M5014 | 8 / 16 | Optional | 2x GbE | Multi-burner | 1x 675 W |
| 7945-82U | 1x Xeon X5690 3.46 GHz 6C 12 MB 1333 MHz | 1x 4 GB | M5015 | 8 / 16 | Optional | 2x GbE | Multi-burner | 1x 675 W |

* Processor detail: Processor quantity and model, core speed, number of cores, L3 cache, memory speed.

Processor options

Features of the Intel Xeon 5600 processors used in the x3650 M3 include:

- Intel QuickPath Technology (QPI), a platform architecture that provides high-speed (up to 25.6 GBps), and point-to-point connections both between processors and between processors and the I/O hub. Each processor has its own dedicated memory that it accesses directly through an Integrated Memory Controller. In cases where a processor needs to access the dedicated memory of another processor, it can do so through the high-speed QPI that links all the processors.
- Turbo Boost Technology dynamically turns off unused processor cores and increases the clock speed of the cores in use. It will increase the frequency in steps of 133 MHz (to a maximum of three steps or 400 MHz) as long as the processors' predetermined thermal and electrical requirements are still met. For example, with three cores active, a 2.26 GHz processor can run the cores at 2.4 GHz. With only one or two cores active, the same processor can run those cores at 2.53 GHz. All Xeon 5600 processors support Turbo Boost with the exception of L5609, E5607, E5606, and E5603.
- Intel Hyper-Threading Technology, which boosts performance for multi-threaded applications by enabling simultaneous multi-threading within each processor core, up to two threads per core. Hyper-Threading reduces computational latency, thereby making optimal use of every clock cycle. All Xeon 5600 processors support Hyper-Threading Technology with the exception of L5609, E5607, E5606, and E5603.
- Intelligent Power Capability powers individual processor elements on and off as needed, to reduce power draw.
- Execute Disable Bit functionality can help prevent certain classes of malicious buffer overflow attacks when combined with a supporting operating system.
- Intel Virtualization Technology integrates hardware-level virtualization hooks that allow operating system vendors to better utilize the hardware for virtualization workloads.

The x3650 M3 supports the processor options listed in the following table. The server supports up to two processors. This table shows which server models have each processor standard. If there is no corresponding *where-used* model for a particular processor then this processor is only available through CTO.

In the x3650 M3, two processors are standard and the server supports two maximum.

Table 5. Processor options

| Part number | Feature code | Intel Xeon Processor | Models where used |
|-----------------------------------|--------------|---|-------------------|
| Intel Xeon 5600 series processors | | | |
| 81Y6538 | A0YX | Intel Xeon E5603 4C 1.60GHz 4MB 1066MHz 80w | 12x |
| 59Y4022 | 7708 | Intel Xeon E5640 4C 2.66GHz 12MB 1066MHz 80w | G2x |
| 81Y6542 | A0Z1 | Intel Xeon E5649 6C 2.53GHz 12MB 1333MHz 80w | 62x |
| 59Y4017 | 7703 | Intel Xeon L5609 4C 1.86GHz 12MB 1066MHz 40w | - |
| 59Y4018 | 7704 | Intel Xeon L5630 4C 2.13GHz 12MB 1066MHz 40w | C2x |
| 59Y4019 | 7705 | Intel Xeon L5640 6C 2.26GHz 12MB 1333MHz 60w | H2x, H4x |
| 81Y6541 | A0Z0 | Intel Xeon X5647 4C 2.93GHz 12MB 1066MHz 130w | - |
| 59Y4024 | 7710 | Intel Xeon X5660 6C 2.80GHz 12MB 1333MHz 95w | L2x, L4x |
| 59Y4026 | 7712 | Intel Xeon X5667 4C 3.06GHz 12MB 1333MHz 95w | - |
| 59Y4025 | 7711 | Intel Xeon X5670 6C 2.93GHz 12MB 1333MHz 95w | M2x |
| 81Y6543 | A0Z2 | Intel Xeon X5672 4C 3.20GHz 12MB 1333MHz 95w | - |
| 81Y6544 | A0Z3 | Intel Xeon X5675 6C 3.06GHz 12MB 1333MHz 95w | 72x |
| 59Y4028 | 7714 | Intel Xeon X5680 6C 3.33GHz 12MB 1333MHz 130w | N2x |
| 81Y6545 | A0Z4 | Intel Xeon X5687 4C 3.60GHz 12MB 1333MHz 130w | - |
| 81Y6546 | A0Z5 | Intel Xeon X5690 6C 3.46GHz 12MB 1333MHz 130w | 82x |

Memory options

IBM DDR3 memory is compatibility tested and tuned for optimal System x performance and throughput. IBM memory specifications are integrated into the light path diagnostics for immediate system performance feedback and optimum system uptime. From a service and support standpoint, IBM memory automatically assumes the IBM system warranty, and IBM provides service and support worldwide.

The IBM System x3650 M3 supports up to nine DDR3 DIMMs when one processor is installed and up to 18 DIMMs when two processors are installed. However, the maximum number of DIMMs is limited by the number of ranks in the DIMMs:

- RDIMMs
 - Up to 18 single-rank RDIMMs (nine per processor) for a maximum of 72 GB (18x 4 GB)
 - Up to 18 dual-rank RDIMMs for a maximum of 288 GB (18x 16 GB)
 - Up to 12 quad-rank RDIMMs for a maximum of 192 GB (12x 16 GB)
- UDIMMs
 - Up to 12 dual-rank UDIMMs for a maximum of 48 GB (12x 4 GB)

Each processor has three memory channels, and there are three DIMMs per channel. RDIMMs can be populated three per channel. However, UDIMMs can only be populated two DIMMs per channel. That is, you can have up to 18 RDIMMs installed in the server, but only up to 12 UDIMMs. Mixing UDIMMs and RDIMMs is not supported.

Maximum memory speed is limited by memory speed supported by the specific processor and by the number and type of DIMMs installed (whichever has a lower memory speed rating), as follows:

- Intel Xeon 5600 series processors:
 - 1333 MHz when one or two single-rank or dual-rank RDIMMs per channel are installed or one UDIMM per channel is installed
 - 1066 MHz when one quad-rank RDIMM per channel is installed or two UDIMMs per channel are installed
 - 800 MHz when three single-rank or dual-rank RDIMMs or two quad-rank RDIMMs per channel are installed

The server supports both 1.5 V and 1.35 V DIMMs. Mixing 1.5 V and 1.35 V DIMMs in the same server is supported for Intel Xeon 5600 series processor-based systems, in such a case all DIMMs operate at 1.5 V. Intel Xeon 5500 series processor-based systems do not support 1.35 V DIMMs.

The following memory protection technologies are supported:

- ECC
- ChipKill (for x4-based RDIMMs)
- Memory mirroring
- Memory sparing

If memory mirroring is used then DIMMs must be installed in pairs (minimum of one pair per each CPU), and both DIMMs in a pair must be identical in type and size. If Memory Sparing is used then DIMMs must be installed in sets of three, and all DIMMs in the same set must be identical in type and size. Memory sparing is only supported for Intel Xeon 5600 series processor-based systems.

The following table lists memory options available for x3650 M3 server.

Table 6. Memory options

| Part number | Feature code | Description | Maximum quantity | Models where used |
|--------------------|--------------|---|------------------|-------------------|
| UDIMM | | | | |
| 44T1569 | 1914 | 2GB (1x2GB, Dual Rankx8) PC3-10600 CL9 ECC DDR3-1333MHz LP UDIMM | 12 | |
| 49Y1403 | A0QS | 2GB (1x2GB, 1Rx8, 1.35V) PC3L-10600 CL9 ECC DDR3 1333MHz LP UDIMM | 12 | |
| 49Y1404 | 8648 | 4GB (1x4GB, 2Rx8, 1.35V) PC3L-10600 CL9 ECC DDR3 1333MHz LP UDIMM | 12 | |
| 1.35V RDIMM | | | | |
| 49Y1405 | 8940 | 2GB (1x2GB, 1Rx8, 1.35V) PC3L-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | |
| 49Y1392 | 3893 | 2GB (1x2GB, 2Rx8, 1.35V) PC3L-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | |
| 49Y1394 | 3894 | 4GB (1x4GB, 2Rx4, 1.35V) PC3L-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | C2x, H2x |
| 49Y1406 | 8941 | 4GB (1x4GB, 1Rx4, 1.35V) PC3L-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | Other models |
| 49Y1407 | 8942 | 4GB (1x4GB, 2Rx8, 1.35V) PC3L-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | |
| 49Y1397 | 8923 | 8GB (1x8GB, 2Rx4, 1.35V) PC3L-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | |
| 49Y1398 | 8921 | 8GB (1x8GB, 2Rx4, 1.35V) PC3L-8500 CL7 ECC DDR3 1066MHz LP RDIMM | 18 | |
| 49Y1563 | A1QT | 16GB (1x16GB, 2Rx4, 1.35V) PC3L-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | |
| 49Y1400 | 8939 | 16GB (1x16GB, 4Rx4, 1.35V) PC3L-8500 CL7 ECC DDR3 1066MHz LP RDIMM | 12 | |
| 1.5V RDIMM | | | | |
| 44T1592 | 1712 | 2GB (1x2GB, 1Rx8, 1.5V) PC3-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | |
| 49Y1433 | 8934 | 2GB (1x2GB, 2Rx8, 1.5V) PC3-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | |
| 49Y1434 | 8935 | 2GB (1x2GB, 1Rx4, 1.5V) PC3-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | |
| 44T1599 | 1713 | 4GB (1x4GB, Dual Rankx8) PC3-10600 CL9 ECC DDR3-1333MHz LP RDIMM | 18 | |
| 49Y1435 | 8936 | 4GB (1x4GB, 2Rx4, 1.5V) PC3-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | |
| 49Y1436 | 8937 | 8GB (1x8GB, 2Rx4, 1.5V) PC3-10600 CL9 ECC DDR3 1333MHz LP RDIMM | 18 | |
| 46C7483 | 1707 | 16GB (1x16GB, Quad Rankx4) PC3-8500 CL7 ECC DDR3 1066MHz LP RDIMM | 12 | |

Internal disk storage options

IBM System x3650 M3 server supports the following internal storage configurations:

- Four SATA 2.5" SFF Simple-Swap drive bays (only available in CTO)
- Four SAS/SATA 2.5" SFF hot-swap drive bays
- Eight SAS/SATA 2.5" SFF hot-swap drive bays
- Sixteen SAS/SATA 2.5" SFF hot-swap drive bays
- Eight SAS/SATA 2.5" SFF hot-swap drive bays and internal tape drive

Figure 5 shows these configurations.

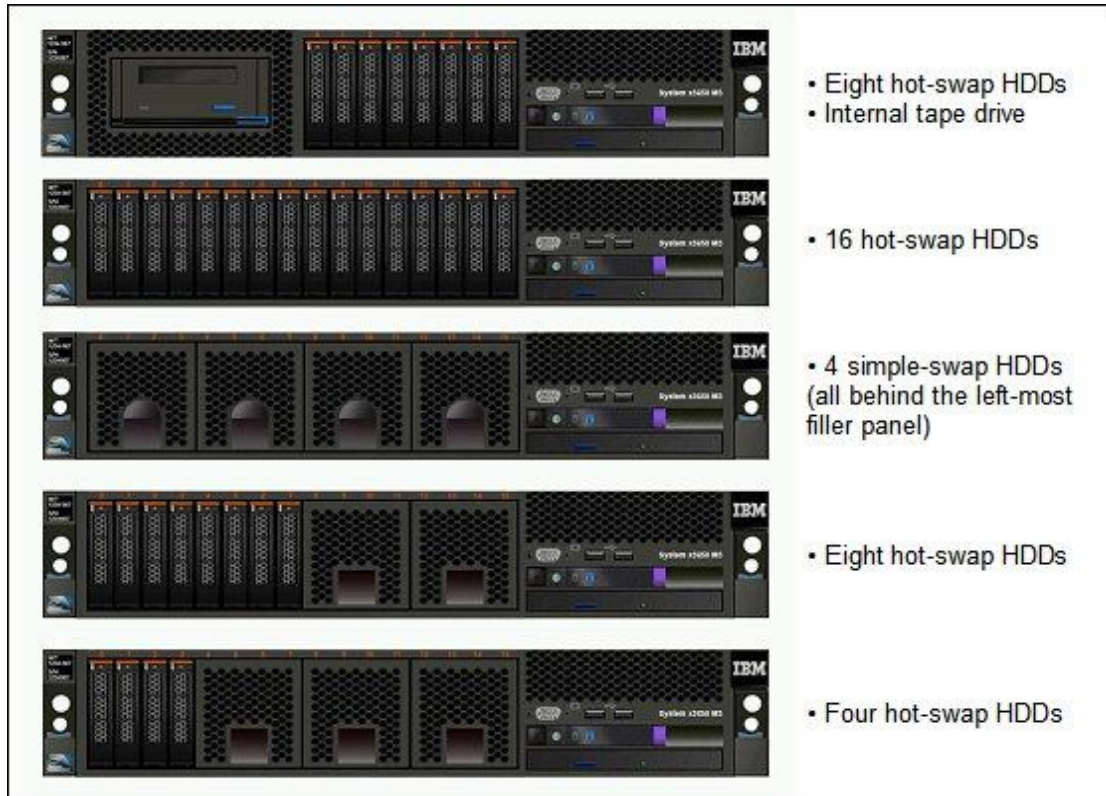


Figure 5. Internal drive configurations

Backplanes and enablement kits

Standard models of x3650 M3 ship with four (model A2x) or eight (all models except A2x) SAS/SATA 2.5" SFF hot-swap hard drive bays. The following table shows internal storage expansion options available for x3650 M3 server.

Table 7. Internal storage expansion options

| Part number | Feature code | Name | Maximum supported |
|-------------|--------------|---|-------------------|
| 69Y4236 | 4174 | IBM System x3650 M3 Hot-Swap SAS/SATA 4 Pac HDD Upgrade Option | 1 |
| 59Y3825 | 1747 | Hot-swap SAS SATA 8 Pack HDD Enablement Option (with 6 Gb/sec expander) | 1 |
| 69Y5034 | 5720 | Hot-swap SAS SATA 8 Pack HDD Enablement Kit (with two ServeRAID M5015 adapters) | 1 |
| 59Y3806 | 4181 | IBM System x3650 M3 Tape Enablement Kit | 1 |

These options have the following descriptions:

- 69Y4236 upgrades models with four hot-swap HDD bays to eight hot-swap HDD bays. This option requires a ServeRAID M1015, M5014, or M5015.
- 59Y3825 upgrades models with eight hot-swap HDD bays to 16 hot-swap HDD bays. This option includes a SAS expander card that fits into a dedicated RAID slot, and RAID controller occupies one of the four PCIe slots, limiting the number of available slots to three.
- 69Y5034 upgrades models with eight hot-swap HDD bays to 16 hot-swap HDD bays. This option includes two ServeRAID M5015 RAID controllers (without batteries). The number of available PCIe slots is three.
- 59Y3806 upgrades models with eight hot-swap HDD bays to eight hot-swap HDD bays plus an internal tape drive (DDS5, DDS6, or RDX). This includes the riser card with USB and SAS tape connectors, replacing the standard SAS RAID riser card.

RAID controllers

The following table lists the RAID controllers and additional options used for internal disk storage of x3650 M3 server.

Table 8. RAID controllers for internal storage

| Part number | Feature code | Description | Maximum supported | Standard models where used |
|-------------|--------------|--|-------------------|---|
| 46M0969 | 3889 | ServeRAID B5015 SSD Controller | 1 | - |
| 49Y4731 | 9742 | ServeRAID BR10il SAS/SATA Controller v2 | 1 | A2x, 12x |
| 81Y4492 | A1XL | ServeRAID H1110 SAS/SATA Controller for IBM System x | 1 | - |
| 46M0831 | 0095 | ServeRAID M1015 SAS/SATA Controller | 1 | B2x, C2x, D2x, H2x, N2x, 22x, 32x, D4x |
| 46M0916 | 3877 | ServeRAID M5014 SAS/SATA Controller | 1 | F2x, G2x, 52x, 54x, 62x |
| 46M0829 | 0093 | ServeRAID M5015 SAS/SATA Controller | 1 or 2* | J2x, L2x, M2x, JSx, H4x, J4x, J6x, JCx, L4x, 72x, 82x |
| 90Y4304 | A2NF | ServeRAID M5016 SAS/SATA Controller for IBM System x | 1 | - |
| 46M0830 | 0094 | ServeRAID M5025 SAS/SATA Controller | 1 | - |
| 43W4296 | 3571 | ServeRAID MR10i SAS/SATA Controller | 1 | - |
| 46M0832 | 9749 | ServeRAID M1000 Series Advance Feature Key | 1 | - |
| 46M0930 | 5106 | ServeRAID M5000 Series Advance Feature Key | 1† | - |
| 46M0917 | 5744 | ServeRAID M5000 Series Battery Kit | 1 | J2x, L2x, M2x, JSx, H4x, J4x, J6x, JCx, L4x, 72x, 82x |
| 68Y7396 | 5862 | ServeRAID M5000 Series Battery Remote Mount Cable | 1 | - |
| 81Y4426 | A10C | ServeRAID M5000 Series Performance Accelerator Key | 1† | - |

* When this RAID controller is ordered separately, then the maximum quantity supported is one. When this RAID controller is ordered as a part of the 69Y5034 upgrade (see Table 6), then the maximum quantity supported is two.

† Only one key is supported in each controller, either the Advance Feature Key or the Performance Accelerator Key.

When the maximum number of HDD bays is eight, the RAID controller occupies a dedicated PCIe slot on x3650 M3 and does not consume the regular PCIe slot. When 16 HDD bay configurations are used, the number of available regular PCIe slots is three.

The ServeRAID BR10il v2 SAS/SATA Controller has the following specifications:

- One Mini-SAS internal connector
- Supports RAID levels 0, 1, and 1E
- 3 Gbps throughput per port
- Based on the LSI 1064E controller
- PCI Express 2.0 x4 host interface
- Stripe size: 64 KB (fixed)

The ServeRAID M1015 SAS/SATA Controller has the following specifications:

- Two Mini-SAS internal connectors
- Supports RAID levels 0, 1, and 10
- Supports RAID levels 5 and 50 with optional ServeRAID M1000 Series Advanced Feature Key
- 6 Gbps throughput per port
- Based on the LSI SAS2008 6 Gbps RAID on Chip (ROC) controller
- PCI Express 2.0 x8 host interface
- Configurable stripe size up to 64 KB

The ServeRAID M5014 SAS/SATA Controller has the following specifications:

- Two Mini-SAS internal connectors
- Supports RAID levels 0, 1, 5, 10, and 50
- Supports RAID 6 and 60 with the optional M5000 Advanced Feature Key
- Performance optimization for SSD drives with optional M5000 Series Performance Accelerator Key
- 6 Gbps throughput per port
- PCI Express 2.0 x8 host interface
- Based on the LSI SAS2108 6 Gbps ROC controller
- 256 MB of onboard cache
- Optional Intelligent Li-Ion-based battery backup unit with the ServeRAID M5000 Series Battery Kit

The ServeRAID M5015 SAS/SATA Controller has the following specifications:

- Two Mini-SAS internal connectors
- Supports RAID levels 0, 1, 5, 10, and 50
- Supports RAID 6 and 60 with the optional M5000 Advanced Feature Key
- Performance optimization for SSD drives with optional M5000 Series Performance Accelerator Key
- 6 Gbps throughput per port
- PCI Express 2.0 x8 host interface
- Based on the LSI SAS2108 6 Gbps ROC controller
- 512 MB of onboard cache
- Standard Intelligent Li-Ion-based battery backup unit with up to 48 hours of data retention

The ServeRAID B5015 SSD Controller has the following specifications:

- Two Mini-SAS internal connectors
- Supports RAID levels 1 and 5
- 6 Gbps throughput per SAS port
- PCI Express 2.0 x8 host interface
- Based on PMC-Sierra PM8013 maxSAS 6 Gb/s SAS RoC controller
- Performance optimized for SSDs
- Stripe size of up to 1 MB

For more information, see the list of IBM Redbooks® Product Guides in the RAID adapters category:
<http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=raid>

The following table lists hard drive options for internal disk storage of x3650 M3 server.

Table 9. Disk drive options for internal disk storage (Part 1)

| Part number | Feature code | Description | Maximum supported |
|-------------------------|--------------|--|-------------------|
| 2.5-inch SSDs | | | |
| 43W7714 | 3745 | IBM 50GB SATA 2.5" SFF Slim-HS High IOPS SSD | 16 |
| 49Y5839 | A3AS | IBM 64GB SATA 2.5" MLC HS Enterprise Value SSD | 16 |
| 00W1125 | A3HR | IBM 100GB SATA 2.5" MLC HS Enterprise SSD | 16 |
| 90Y8648 | A2U4 | IBM 128GB SATA 2.5" MLC HS Enterprise Value SSD | 16 |
| 43W7718 | A2FN | IBM 200GB SATA 2.5" MLC HS SSD | 16 |
| 90Y8643 | A2U3 | IBM 256GB SATA 2.5" MLC HS Enterprise Value SSD | 16 |
| 49Y5844 | A3AU | IBM 512GB SATA 2.5" MLC HS Enterprise Value SSD | 16 |
| 2.5-inch 15K SAS | | | |
| 81Y9670 | A283 | IBM 300GB 15K 6Gbps SAS 2.5" SFF HS HDD | 16 |
| 42D0672 | 5522 | IBM 73GB 15K 6Gbps SAS 2.5" SFF Slim-HS HDD | 16 |
| 2.5-inch 10K SAS | | | |
| 42D0632 | 5537 | IBM 146GB 10K 6Gbps SAS 2.5" SFF Slim-HS HDD | 16 |
| 90Y8877 | A2XC | IBM 300GB 10K 6Gbps SAS 2.5" SFF G2HS HDD | 16 |
| 90Y8913 | A2XF | IBM 300GB 10K 6Gbps SAS 2.5" SFF G2HS SED | 16 |
| 42D0637 | 5599 | IBM 300GB 10K 6Gbps SAS 2.5" SFF Slim-HS HDD | 16 |
| 81Y9662 | A3EG | IBM 900GB 10K 6Gbps SAS 2.5" SFF G2HS SED | 16 |
| 81Y9650 | A282 | IBM 900GB 10K 6Gbps SAS 2.5" SFF HS HDD | 16 |
| 44W2264 | 5413 | IBM 300GB 10K 6Gbps SAS 2.5" SFF Slim-HS SED | 16 |
| 90Y8872 | A2XD | IBM 600GB 10K 6Gbps SAS 2.5" SFF G2HS HDD | 16 |
| 90Y8908 | A3EF | IBM 600GB 10K 6Gbps SAS 2.5" SFF G2HS SED | 16 |
| 49Y2003 | 5433 | IBM 600GB 10K 6Gbps SAS 2.5" SFF Slim-HS HDD | 16 |
| 2.5-inch 15K SAS | | | |
| 90Y8926 | A2XB | IBM 146GB 15K 6Gbps SAS 2.5" SFF G2HS HDD | 16 |
| 90Y8944 | A2ZK | IBM 146GB 15K 6Gbps SAS 2.5" SFF G2HS SED | 16 |
| 42D0677 | 5536 | IBM 146GB 15K 6Gbps SAS 2.5" SFF Slim-HS HDD | 16 |
| 44W2294 | 5412 | IBM 146GB 15K 6Gbps SAS 2.5" SFF Slim-HS SED | 16 |
| 2.5-inch NL SAS | | | |
| 81Y9690 | A1P3 | IBM 1TB 7.2K 6Gbps NL SAS 2.5" SFF HS HDD | 16 |
| 90Y8953 | A2XE | IBM 500GB 7.2K 6Gbps NL SAS 2.5" SFF G2HS HDD | 16 |
| 42D0707 | 5409 | IBM 500GB 7200 6Gbps NL SAS 2.5" SFF Slim-HS HDD | 16 |

Table 9. Disk drive options for internal disk storage (Part 2)

| Part number | Feature code | Description | Maximum supported |
|------------------|--------------|--|-------------------|
| 2.5-inch NL SATA | | | |
| 81Y9730 | A1AV | IBM 1TB 7.2K 6Gbps NL SATA 2.5" SFF HS HDD | 16 |
| 81Y9722 | A1NX | IBM 250GB 7.2K 6Gbps NL SATA 2.5" SFF HS HDD | 16 |
| 81Y9726 | A1NZ | IBM 500GB 7.2K 6Gbps NL SATA 2.5" SFF HS HDD | 16 |

For information about solid state drives, see the IBM Redbooks Product Guide *Solid State Drives for IBM BladeCenter and System x servers*, available from:

<http://www.redbooks.ibm.com/abstracts/tips0792.html?Open>

For information about self-encrypting drives (SEDs), see the IBM Redbooks Product Guide *Self-Encrypting Drives for IBM System x*, available from:

<http://www.redbooks.ibm.com/abstracts/tips0761.html?Open>

For a discussion about drive interface technology include SAS and SATA, see the IBM Redpaper, *IBM System x Server Disk Drive Interface Technology*, available from

<http://www.redbooks.ibm.com/abstracts/redp4791.html?Open>

Internal backup units

The server supports the internal tape drive options listed in the following table. The x3650 M3 Tape Enablement Kit, 59Y3806, is required to support these tapes internally. 59Y3806 upgrades models with eight hot-swap HDD bays to support an internal tape drive (DDS5, DDS6, or RDX). This option includes the riser card with USB and SAS tape connectors, replacing the standard SAS RAID riser card.

Table 10. Internal tape drives

| Part number | Feature code | Description | Maximum supported |
|-------------|--------------|--|-------------------|
| 59Y3806 | 4181 | x3650 M3 Tape Enablement Kit | 1 |
| 46C5399 | 5711 | IBM DDS Generation 5 USB Tape Drive | 1 |
| 39M5636 | 5395 | IBM DDS Gen 6 USB Tape Drive | 1 |
| 46C5367 | 5708 | IBM RDX 320GB Cartridge | 1 |
| 46C5368 | 5709 | IBM RDX 500GB Cartridge | 1 |
| 00D2786 | A2VE | IBM RDX Internal USB 3.0 Dock with 320GB Cartridge | 1 |
| 00D2787 | A2VF | IBM RDX Internal USB 3.0 Dock with 500GB Cartridge | 1 |
| 00D2788 | A2VG | IBM RDX Internal USB 3.0 Dock with 1TB Cartridge | 1 |

For more information, see the list of IBM Redbooks Product Guides in the Backup units category:

<http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=tape>

Optical drives

The server supports the optical drive options listed in the following table.

Table 11. Optical drives

| Part number | Feature code | Description | Maximum supported | Standard models where used |
|-------------|--------------|--------------------------------------|-------------------|----------------------------|
| 46M0901 | 4161 | IBM UltraSlim Enhanced SATA DVD-ROM | 1 | - |
| 46M0902 | 4163 | UltraSlim Enhanced SATA Multi-Burner | 1 | JSx, J6x, JCx |

IBM UltraSlim Enhanced SATA DVD-ROM (part number 46M0901) supports the following media and speeds for reading:

- CD-ROM 24X
- CD-DA (DAE) 20X
- CD-R 24X
- CD-RW 24X
- DVD-ROM (single layer) 8X
- DVD-ROM (dual layer) 8X
- DVD-R (4.7 GB) 6X
- DVD-R DL 4X
- DVD+R 6X
- DVD+R DL 4X
- DVD-RW (4.7 GB) 4X
- DVD+RW 4X
- DVD-RAM (4.7/9.4 GB) 4X

IBM UltraSlim Enhanced SATA Multi-Burner (46M0902) supports the same media and speeds for reading as DVD-ROM (46M0901). This drive also supports the following media and speeds for writing:

- CD-R 24X
- CD-RW 4X
- High Speed CD-RW 10X
- Ultra Speed CD-RW 16X
- Ultra Speed Plus CD-RW 16X
- DVD-R 8X
- DVD-R DL 6X
- DVD+R 8X
- DVD+R DL 6X
- DVD-RW 6X
- DVD+RW 8X
- DVD-RAM 5X

I/O expansion options

The server supports up to four PCI Express slots with different riser cards installed into two riser sockets on the system planar (one riser socket supports installation of one riser card). The slot form factors are as follows:

- Slot 1: Full height, full length
- Slot 2: Low profile with standard bracket
- Slot 3: Full height, full length
- Slot 4: Full height, half length

Riser 1 supplies slots 1 and 2. Riser 2 supplies slots 3 and 4. Standard models have two riser cards installed that provide a total of four PCI Express 2.0 x8 slots (two PCI Express x8 Gen 2 slots per riser card).

You can replace each standard riser with one of the following risers (or configure one of these riser cards instead of the standard 2 x8 riser using special bid or CTO) :

- Riser with one PCI Express x16 Gen 2 slot
- Riser with two PCI-X 64 bit/133 MHz slots

The following table lists the PCI riser card options.

Table 12. PCI riser card options

| Part number | Feature code | Description | Maximum supported |
|-------------|--------------|--|-------------------|
| 46M1072 | 5086 | PCI Express (2x8) Riser Card (included in standard models) | 2 |
| 46M1073 | 5088 | PCI Express (1x16) Riser Card | 2 |
| 46M1074 | 5087 | PCI-X Riser Card (two PCI-X 1.0a 64-bit 133 MHz slots) | 2 |
| None* | 3734 | PCI-Express (2 x8 slots; 1 FH/FL, 1 FH/HL) Riser Card 2 | - |
| None* | 4276 | PCI-X (2 slots; 1 FH/FL, 1 FH/HL) Riser Card 2 | - |
| None* | 4303 | PCI-Express (1 x16 slot; FH/FL) Riser Card 2 | - |

* These options are CTO only

The server has an additional PCI Express slot dedicated to the RAID controller.

Network adapters

x3650 M3 supports up to four integrated Gigabit Ethernet ports. Two ports are standard, and two ports can be added by installing the optional Dual-port Gigabit Ethernet Daughter card, 46M1076. This card uses a dedicated connector on the motherboard and does not consume a PCI expansion slot. Integrated NICs have the following features:

- Broadcom BCM5709 chip
- TCP Offload Engine (TOE) support
- Wake on LAN support
- 802.1Q VLAN tagging support
- NIC Teaming (load balancing and failover)

Table 13. Network adapters

| Part number | Feature code | Description | Maximum supported |
|-----------------------|--------------|---|-------------------|
| 40 Gb Ethernet | | | |
| 00D9550 | A3PN | Mellanox ConnectX-3 FDR VPI IB/E Adapter for IBM System x | 4 |
| 10 Gb Ethernet | | | |
| 42C1820 | 1637 | Brocade 10Gb CNA for IBM System x | 4 |
| 42C1820 | 1637 | Brocade 10 Gb Dual-port CNA for IBM System x | 4 |
| 49Y4250 | 5749 | Emulex 10GbE Virtual Fabric Adapter for IBM System x | 3 |
| 49Y7950 | A18Z | Emulex 10GbE Virtual Fabric Adapter II for IBM System x | 4 |
| 95Y3751 | A348 | Emulex Dual Port VFAll Adapter & FCoE/iSCSI License | 3 |
| 49Y4274 | 5715 | Emulex VFA II FCoE/iSCSI License for IBM System x | - |
| 81Y1531 | 5446 | Mellanox ConnectX-2 VPI Single-port QSFP QDR IB/10GbE PCI-E 2.0 HCA | 4 |
| 81Y9990 | A1M4 | Mellanox ConnectX-2 Dual Port 10GbE Adapter for IBM System x | 4 |
| 81Y1539 | 5448 | Mellanox ConnectX-2 EN Dual-port SFP+ 10GbE PCI-E 2.0 Adapter | 4 |
| 00D9690 | A3PM | Mellanox ConnectX-3 10 GbE Adapter for IBM System x | 4 |
| 95Y3451 | A2F6 | Mellanox ConnectX-3 VPI Single-port QSFP QDR/FDR10/10GbE HCA | 4 |
| 95Y3455 | A2F7 | Mellanox ConnectX-3 VPI Dual-port QSFP QDR/FDR10/10GbE HCA | 4 |
| 42C1800 | 5751 | QLogic 10 Gb Dual Port CNA for IBM System x | 4 |
| 1 Gb Ethernet | | | |
| 90Y9370 | A2V4 | Broadcom NetXtreme I Dual Port GbE Adapter for IBM System x | 4 |
| 90Y9352 | A2V3 | Broadcom NetXtreme I Quad Port GbE Adapter for IBM System x | 4 |
| 49Y7910 | A18Y | Broadcom NetXtreme II Dual Port 10GBaseT Adapter for IBM System x | 3 |
| 49Y4230 | 5767 | Intel Ethernet Dual Port Server Adapter I340-T2 for IBM System x | 4 |
| 49Y4240 | 5768 | Intel Ethernet Quad Port Server Adapter I340-T4 for IBM System x | 4 |
| 49Y7960 | A2EC | Intel X520 Dual Port 10GbE SFP+ Adapter for IBM System x | 4 |
| 49Y7970 | A2ED | Intel X540-T2 Dual Port 10GBaseT Adapter for IBM System x | 4 |
| 42C1750 | 2975 | PRO/1000 PF Server Adapter by Intel | 4 |
| InfiniBand | | | |
| 95Y3750 | A2MY | Mellanox ConnectX-2 Dual-port QSFP QDR IB Adapter | 1 |
| 00D9550 | A3PN | Mellanox ConnectX-3 FDR VPI IB/E Adapter for IBM System x | 4 |

For more information, see the list of IBM Redbooks Product Guides in the Networking adapters category: <http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=networkadapters>

Storage host bus adapters

The following table lists storage HBAs supported by x3650 M3 server.

Table 14. Storage adapters

| Part number | Feature code | Description | Maximum supported |
|----------------------------|--------------|--|-------------------|
| 16 Gb Fibre Channel | | | |
| 81Y1675 | A2XV | Brocade 16Gb FC Dual-port HBA for IBM System x | 4 |
| 81Y1668 | A2XU | Brocade 16Gb FC Single-port HBA for IBM System x | 4 |
| 81Y1662 | A2W6 | Emulex 16Gb FC Dual-port HBA for IBM System x | 4 |
| 81Y1655 | A2W5 | Emulex 16Gb FC Single-port HBA for IBM System x | 4 |
| 00Y3337 | A3KW | QLogic 16Gb FC Single-port HBA for IBM System x | 4 |
| 00Y3341 | A3KX | QLogic 16Gb FC Dual-port HBA for IBM System x | 4 |
| 8 Gb Fibre Channel | | | |
| 46M6050 | 3591 | Brocade 8Gb FC Dual-port HBA for IBM System x | 4 |
| 46M6049 | 3589 | Brocade 8Gb FC Single-port HBA for IBM System x | 4 |
| 42D0494 | 3581 | Emulex 8Gb FC Dual-port HBA for IBM System x | 4 |
| 42D0485 | 3580 | Emulex 8Gb FC Single-port HBA for IBM System x | 4 |
| 42D0510 | 3579 | QLogic 8Gb FC Dual-port HBA for IBM System x | 4 |
| 42D0501 | 3578 | QLogic 8Gb FC Single-port HBA for IBM System x | 4 |
| 4 Gb Fibre Channel | | | |
| 59Y1993 | 3886 | Brocade 4Gb FC Dual-port HBA for IBM System x | 4 |
| 59Y1987 | 3885 | Brocade 4Gb FC Single-port HBA for IBM System x | 4 |
| 42C2071 | 1699 | Emulex 4Gb FC Dual-Port PCI-E HBA for IBM System x | 4 |
| 42C2069 | 1698 | Emulex 4Gb FC Single-Port PCI-E HBA for IBM System x | 4 |
| 39R6525 | 3567 | QLogic 4Gb FC Single-Port PCIe HBA for IBM System x | 4 |
| 39R6527 | 3568 | QLogic 4Gb FC Dual-Port PCIe HBA for IBM System x | 4 |
| iSCSI | | | |
| 39Y6146 | 2976 | QLogic iSCSI Single-Port PCIe HBA for IBM System x | 4 |
| 42C1770 | 2977 | QLogic iSCSI Dual-Port PCIe HBA for IBM System x | 4 |
| SAS | | | |
| 46M0912 | 3876 | IBM 6Gb Performance Optimized HBA | 4 |
| 46M0907 | 5982 | IBM 6Gb SAS HBA | 4 |

For more information, see the list of IBM Redbooks Product Guides in the Host bus adapters category: <http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=hba>

PCIe SSD adapters

The server supports the High IOPS SSD adapters listed in the following table.

Table 15. SSD adapters

| Part number | Feature code | Description | Maximum supported |
|-------------|--------------|---|-------------------|
| 46M0877 | 0096 | IBM 160GB High IOPS SS Class SSD PCIe Adapter | 4 |
| 46M0898 | 1649 | IBM 320GB High IOPS MS Class SSD PCIe Adapter | 4 |
| 46M0878 | 0097 | IBM 320GB High IOPS SD Class SSD PCIe Adapter | 3 |
| 81Y4535 | A1NE | 320 GB High IOPS SLC Adapter for IBM System x | - |
| 81Y4519 | 5985 | 640 GB High IOPS MLC Duo Adapter for IBM System x | 2 |
| 81Y4539 | A1ND | 640 GB High IOPS SLC Duo Adapter for IBM System x | - |

Power supplies

The server supports up to two redundant power supplies, providing N+N redundancy. Standard models come with one or two power supplies (model dependent). -48V DC models are only available through CTO. The following table lists the power supplies.

Table 16. Power supplies

| Part number | Feature code | Description | Maximum supported | Standard models where used |
|-------------|--------------|--|-------------------|-----------------------------------|
| 46M1075 | 2100 | IBM 675 W Redundant Power Supply | 2* | All other models |
| 69Y1510 | 4780 | IBM -48V DC Input 675 W Redundant Power Supply | 2 | - |
| 81Y6557 | A0ZG | IBM 675W High Efficiency Redundant AC Power Supply | 2* | 54x, 72x, 82x, J6x, JCx |
| 81Y6558 | A0ZH | IBM 460W Redundant AC Power Supply | 2* | 12x, 22x, 32x, D4x, H4x, 52x, 62x |

* At least 1 power supply comes standard with every model

An AC power supply ships standard with one 2.8 m C13 - C14 power cord. A DC power supply ships without power cords.

Integrated virtualization

The server supports VMware ESXi installed on a USB memory key. The key is installed in a USB socket inside the server. The following table lists the virtualization options.

Table 17. Virtualization options

| Part number | Feature code | Description | Maximum supported |
|-------------|--------------|--|-------------------|
| 41Y8278 | 1776 | IBM USB Memory Key for VMware ESXi 4 | 1 |
| 41Y8287 | 3033 | IBM USB Memory Key for VMware ESXi 4.1 | 1 |
| 41Y8296 | A1NP | IBM USB Memory Key for VMware ESXi 4.1 Update 1 | 1 |
| 41Y8300 | A2VC | IBM USB Memory Key for VMware ESXi 5.0 | 1 |
| 41Y8307 | A383 | IBM USB Memory Key for VMware ESXi 5.0 Update 1 | 1 |
| 41Y8311 | A2R3 | IBM USB Memory Key for VMware ESXi 5.1 | 1 |
| 41Y8298 | A2G0 | IBM Blank USB Memory Key for VMware ESXi Downloads | - |

Remote management

The server contains IBM Integrated Management Module (IMM), which provides advanced service-processor control, monitoring, and an alerting function. If an environmental condition exceeds a threshold or if a system component fails, the IMM lights LEDs to help you diagnose the problem, records the error in the event log, and alerts you to the problem. Optionally, the IMM also provides a virtual presence capability for remote server management capabilities.

The IMM provides remote server management through industry-standard interfaces:

- Intelligent Platform Management Interface (IPMI) Version 2.0
- Simple Network Management Protocol (SNMP) Version 3
- Common Information Model (CIM)
- Web browser

The optional virtual media key is required to enable the remote presence and blue-screen capture features. The remote presence feature provides the following functions:

- Remotely viewing video with graphics resolutions up to 1280x1024 at 75 Hz, regardless of the system state
- Remotely accessing the server using the keyboard and mouse from a remote client
- Mapping the CD or DVD drive, diskette drive, and USB flash drive on a remote client, and mapping ISO and diskette image files as virtual drives that are available for use by the server
- Uploading a diskette image to the IMM memory and mapping it to the server as a virtual drive

The blue-screen capture feature captures the video display contents before the IMM restarts the server when the IMM detects an operating-system hang condition. A system administrator can use the blue-screen capture to assist in determining the cause of the hang condition. The following table lists the remote management option.

Table 18. Remote management option

| Part number | Feature code | Description | Maximum quantity supported |
|-------------|--------------|-----------------------|----------------------------|
| 46C7526 | 5080 | IBM Virtual Media Key | 1 |

Supported operating systems

The server supports the following operating systems:

- Microsoft Windows HPC Server 2008
- Microsoft Windows Server 2003 R2 x64 Datacenter Edition Unlimited Virtualization
- Microsoft Windows Server 2003, Web Edition
- Microsoft Windows Server 2003/2003 R2, Datacenter x64 Edition
- Microsoft Windows Server 2003/2003 R2, Enterprise Edition
- Microsoft Windows Server 2003/2003 R2, Enterprise x64 Edition
- Microsoft Windows Server 2003/2003 R2, Standard Edition
- Microsoft Windows Server 2003/2003 R2, Standard x64 Edition
- Microsoft Windows Server 2008 R2
- Microsoft Windows Server 2008, Datacenter x64 Edition
- Microsoft Windows Server 2008, Datacenter x86 Edition
- Microsoft Windows Server 2008, Enterprise x64 Edition
- Microsoft Windows Server 2008, Enterprise x86 Edition
- Microsoft Windows Server 2008, Standard x64 Edition
- Microsoft Windows Server 2008, Standard x86 Edition
- Microsoft Windows Server 2008, Web x64 Edition
- Microsoft Windows Server 2008, Web x86 Edition
- Microsoft Windows Server 2012
- Microsoft Windows Small Business Server 2003/2003 R2 Premium Edition
- Microsoft Windows Small Business Server 2003/2003 R2 Standard Edition
- Microsoft Windows Small Business Server 2008 Premium Edition
- Microsoft Windows Small Business Server 2008 Standard Edition
- Red Hat Enterprise Linux 4 AS for AMD64/EM64T
- Red Hat Enterprise Linux 4 AS for x86
- Red Hat Enterprise Linux 4 ES for AMD64/EM64T
- Red Hat Enterprise Linux 4 ES for x86
- Red Hat Enterprise Linux 4 WS/HPC for AMD64/EM64T
- Red Hat Enterprise Linux 4 WS/HPC for x86
- Red Hat Enterprise Linux 5 Server Edition
- Red Hat Enterprise Linux 5 Server with Xen x64 Edition
- Red Hat Enterprise Linux 5 Server x64 Edition
- Red Hat Enterprise Linux 6 Server Edition
- Red Hat Enterprise Linux 6 Server x64 Edition
- Red Hat Enterprise MRG 1.0 Realtime (x64)
- Red Hat Enterprise MRG 2.0 Realtime (x64)
- Solaris 10 Operating System
- SUSE LINUX Enterprise Real Time 11 AMD64/EM64T
- SUSE LINUX Enterprise Server 10 for AMD64/EM64T
- SUSE LINUX Enterprise Server 10 for x86
- SUSE LINUX Enterprise Server 10 with Xen for AMD64/EM64T
- SUSE LINUX Enterprise Server 11 for AMD64/EM64T
- SUSE LINUX Enterprise Server 11 for x86
- SUSE LINUX Enterprise Server 11 with Xen for AMD64/EM64T
- VMware ESX 4.0
- VMware ESX 4.1
- VMware ESXi 4.0
- VMware ESXi 4.1
- VMware vSphere 5.0 (ESXi)
- VMware vSphere 5.1 (ESXi)

See the IBM ServerProven® website for the latest information about the specific versions and service levels supported and any other prerequisites:

<http://www.ibm.com/systems/info/x86servers/serverproven/compat/us/nos/matrix.shtml>

Physical and electrical specifications

Dimensions and weight:

- Height: 85 mm (3.36 in)
- Width: 443 mm (17.5 in)
- Depth: 698 mm (27.5 in)
- Weight:
 - Minimum configuration: 21.1 kg (46.5 lb)
 - Maximum configuration: 29.6 kg (65 lb)

Supported environment:

- Air temperature
 - Server on: 10 to 35° C (50 to 95° F); altitude: 0 to 914 m (3,000 ft). Decrease system temperature by 0.75° C for every 1,000-foot increase in altitude.
 - Server off: 5 to 45° C (41 to 113° F)
 - Shipment: -40 to +60° C (-40 to 140° F)
- Humidity
 - Server on: 20 to 80%; maximum dew point 21° C; maximum rate of change 5° C/hr
 - Server off: 8 to 80%; maximum dew point 27° C
- Electrical
 - Models with 675 W power supplies:
 - 100 to 127 (nominal) V ac; 50 Hz or 60 Hz; 7.8 A
 - 200 to 240 (nominal) V ac; 50 Hz or 60 Hz; 3.8 A
 - Input kilovolt-amperes (kVA) (approximately):
 - Minimum configuration: 0.12 kVA
 - Maximum configuration: 0.78 kVA
 - Models with 460 W power supplies:
 - 100 to 127 (nominal) V ac; 50 Hz or 60 Hz; 5.3 A
 - 200 to 240 (nominal) V ac; 50 Hz or 60 Hz; 2.6 A
 - Input kilovolt-amperes (kVA) (approximately):
 - Minimum configuration: 0.12 kVA
 - Maximum configuration: 0.53 kVA
- BTU output
 - Minimum configuration: 307 Btu/hr (90 watts)
 - Maximum configuration: 2260 Btu/hr (780 watts)
- Noise level
 - 6.5 bels (operating)
 - 6.3 bels (idle)

Warranty options

The IBM System x3650 M3 has a 3-year onsite warranty with 9x5/next business day terms. IBM offers the warranty service upgrades through IBM ServicePacs, discussed in this section. The IBM ServicePac is a series of prepackaged warranty maintenance upgrades and post-warranty maintenance agreements with a well-defined scope of services, including service hours, response time, term of service, and service agreement terms and conditions.

IBM ServicePac offerings are country-specific, that is, each country might have its own service types, service levels, response times, and terms and conditions. Not all covered types of ServicePacs might be available in a particular country. For more information about IBM ServicePac offerings available in your country visit the IBM ServicePac Product Selector at:

<https://www-304.ibm.com/sales/gss/download/spst/servicepac>

The following table explains warranty service definitions in more detail.

Table 19. Warranty service definitions

| Term | Description |
|-------------------------|--|
| IBM onsite repair (IOR) | A service technician will come to the server's location for equipment repair. |
| 24x7x2 hour | A service technician is scheduled to arrive at your customer's location within two hours after remote problem determination is completed. We provide service around the clock, every day, including IBM holidays. |
| 24x7x4 hour | A service technician is scheduled to arrive at your customer's location within four hours after remote problem determination is completed. We provide service around the clock, every day, including IBM holidays. |
| 9x5x4 hour | A service technician is scheduled to arrive at your customer's location within four business hours after remote problem determination is completed. We provide service from 8:00 a.m. to 5:00 p.m. in the customer's local time zone, Monday through Friday, excluding IBM holidays. If after 1:00 p.m. it is determined that onsite service is required, the customer can expect the service technician to arrive the morning of the following business day. For noncritical service requests, a service technician will arrive by the end of the following business day. |
| 9x5 next business day | A service technician is scheduled to arrive at your customer's location on the business day after we receive your call, following remote problem determination. We provide service from 8:00 a.m. to 5:00 p.m. in the customer's local time zone, Monday through Friday, excluding IBM holidays. |

In general, the types of IBM ServicePacs are as follows:

- Warranty and maintenance service upgrades
 - One, 2, 3, 4, or 5 years of 9x5 or 24x7 service coverage
 - Onsite repair from next business day to 4 or 2 hours
 - One or 2 years of warranty extension
- Remote technical support services
 - One or three years with 24x7 coverage (severity 1) or 9x5/next business day for all severities
 - Installation and startup support for System x servers
 - Remote technical support for System x servers
 - Software support - Support Line
 - Microsoft or Linux software
 - VMware
 - IBM Systems Director

Regulatory compliance

The server conforms to the following international standards:

- FCC - Verified to comply with Part 15 of the FCC Rules, Class A
- Canada ICES-003, issue 4, Class A
- UL/IEC 60950-1
- CSA C22.2 No. 69950-1-03
- NOM-019
- Argentina IEC60950-1
- Japan VCCI, Class A
- Australia/New Zealand AS/NZS CISPR 22:2006, Class A
- IEC-60950-1:2001 (CB Certificate and CB Test Report)
- Taiwan BSMI CNS 13438, Class A; CNS 14336
- China CCC (4943-2001), GB 9254-2008 Class A, GB 17625.1:2003
- Korea KN22, Class A; KN24
- Russia/GOST ME01, IEC-60950-1, GOST R 51318.22-99, GOST R 51318.24-99, GOST R 51317.3.2-2006, GOST R 51317.3.3-99
- IEC 60950-1 (CB Certificate and CB Test Report)
- CE Mark (EN55022 Class A, EN60950-1, EN55024, EN61000-3-2, EN61000-3-3)
- CISPR 22, Class A
- TUV-GS (EN60950-1 /IEC60950-1,EK1-ITB2000)

External disk storage expansion

The external disk storage expansion enclosures listed in the following table are available.

Table 20. External storage expansion enclosures

| Part number | Description | Maximum quantity supported per one M5025 |
|-------------|------------------------------------|--|
| 172701X | IBM System Storage® EXP3000 | 18 (9 per port) |
| 174712X | IBM System Storage EXP2512 Express | 18 (9 per port) |
| 174724X | IBM System Storage EXP2524 Express | 9 (9 per port) |

The hard disk drives listed in the following table are supported with external expansion enclosures.

Table 21. Hard drive options for external expansion enclosures (Part 1)

| Part number | Description | Maximum quantity supported per one enclosure |
|--|---|--|
| EXP3000 Hot-Swap SATA 3.5" Hard Drives | | |
| 43W7630 | 1000 GB Dual Port Hot Swap SATA | 12 |
| 49Y1940 | IBM 2 TB 7200 Dual Port SATA 3.5" HS HDD | 12 |
| EXP3000 Hot-Swap SAS 3.5" Hard Drives | | |
| 44W2234 | IBM 300 GB 15K 6 Gbps SAS 3.5" Hot-Swap HDD | 12 |
| 44W2239 | IBM 450 GB 15K 6 Gbps SAS 3.5" Hot-Swap HDD | 12 |
| 44W2244 | IBM 600 GB 15K 6 Gbps SAS 3.5" Hot-Swap HDD | 12 |
| EXP2512 Hot-Swap SAS 3.5" Hard Drives | | |
| 49Y1899 | 300 GB 15K 6 Gb SAS 3.5" HDD | 12 |
| 49Y1900 | 450 GB 15K 6 Gb SAS 3.5" HDD | 12 |
| 49Y1901 | 600 GB 15K 6 Gb SAS 3.5" HDD | 12 |
| 49Y1903 | 1 TB 7,200 RPM 6 Gb SAS NL 3.5" HDD | 12 |
| 43W7630 | 1000 GB Dual Port Hot Swap SATA | 12 |
| 49Y1902 | 2 TB 7,200 RPM 6 Gb SAS NL 3.5" HDD | 12 |
| 90Y8720 | 3 TB 7,200 RPM 6 Gb SAS NL 3.5" HDD | 12 |

Table 21. Hard drive options for external expansion enclosures (Part 2)

| Part number | Description | Maximum quantity supported per one enclosure |
|--|---------------------------------------|--|
| EXP2524 Hot-Swap SAS 2.5" Hard Drives | | |
| 49Y1896 | 146 GB 15K 6 Gb SAS 2.5" HDD | 24 |
| 49Y1895 | 300 GB 10K 6 Gb SAS 2.5" HDD | 24 |
| 81Y9596 | 600 GB 10K 6 Gb SAS 2.5" HDD | 24 |
| 49Y1898 | 500 GB 7,200 RPM 6 Gb SAS NL 2.5" HDD | 24 |
| EXP2524 Hot-Swap SAS 2.5" Solid State Drives | | |
| 81Y9956 | 200GB 2.5" SAS SSD | 24 |
| 81Y9960 | 400GB 2.5" SAS SSD | 24 |

The RAID controllers listed in the following table are supported with external expansion enclosures.

Table 22. RAID controllers for external storage expansion enclosures

| Part number | Description | Maximum quantity supported |
|-------------|---|----------------------------|
| 46M0830 | ServeRAID M5025 SAS/SATA Controller | 4 |
| 46M0930 | ServeRAID M5000 Series Advance Feature Key† | 1 per one M5025 |
| 81Y4426 | ServeRAID M5000 Series Performance Accelerator Key† | 1 per one M5025 |

† Only one key is supported in each controller, either the Advance Feature Key or the Performance Accelerator Key.

The ServeRAID M5025 SAS/SATA Controller has the following specifications:

- Two Mini-SAS external connectors
- Supports RAID levels 0, 1, 5, 10, and 50
- Supports RAID 6 and 60 with the optional M5000 Advanced Feature Key
- Performance optimization for SSD drives with optional M5000 Series Performance Accelerator Key
- 6 Gbps throughput per port
- PCI Express 2.0 x8 host interface
- Based on the LSI SAS2108 6 Gbps ROC controller
- 512 MB of onboard cache
- Intelligent Li-Ion-based battery backup unit with up to 48 hours of data retention
- Supports connectivity to the EXP3000, EXP2512, and EXP2524 storage expansion enclosures

For more information, see the IBM Redbooks Product Guide *ServeRAID M5025 SAS/SATA Controller for IBM System x*: <http://www.redbooks.ibm.com/abstracts/tips0739.html?Open>

The external SAS cables listed in the following table are supported with external expansion enclosures and M5025 RAID controllers.

Table 23. External SAS cables for external storage expansion enclosures

| Part number | Description | Maximum quantity supported per enclosure* |
|-------------|-------------------|---|
| 39R6531 | IBM 3 m SAS Cable | 1 |
| 39R6529 | IBM 1 m SAS Cable | 1 |

* Note: The EXP3000 and EX2500 series can be chained with each other. In such a case, one cable is used to connect first EXP25xx or EXP3000 to the RAID controller, and every consecutive EXP unit is connected to previous one by one cable.

External disk storage systems

The following table lists the external storage systems that are supported by the server and can be ordered through System x sales channel. The server may support other IBM disk systems that are not listed in this table. Refer to IBM System Storage Interoperability Center for further information, <http://www.ibm.com/systems/support/storage/ssic>.

Table 24. External disk storage systems

| Part number | Description |
|-------------|--|
| 1746A2D | IBM System Storage DS3512 Express Dual Controller Storage System |
| 1746A2S | IBM System Storage DS3512 Express Single Controller Storage System |
| 1746A4D | IBM System Storage DS3524 Express Dual Controller Storage System |
| 1746A4S | IBM System Storage DS3524 Express Single Controller Storage System |
| 181494H | IBM System Storage DS3950 Model 94 |
| 181498H | IBM System Storage DS3950 Model 98 |
| 181492H | IBM System Storage EXP395 Expansion Unit |
| 1746A2E | IBM System Storage EXP3512 Express Storage™ Expansion Unit |
| 1746A4E | IBM System Storage EXP3524 Express Storage Expansion Unit |

For more information, see the list of IBM Redbooks Product Guides in the Storage Systems category: <http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=externalstorage>

External backup units

The server supports the external backup attachment options listed in the following table.

Table 25. External backup options (Part 1)

| Part number | Description |
|--|---|
| External tape expansion enclosures for internal tape drives | |
| 87651UX | 1U Tape Drive Enclosure |
| 8767HHX | Half High Tape Drive Enclosure |
| 87651NX | 1U Tape Drive Enclosure (with Nema 5-15P LineCord) |
| 8767HNX | Half High Tape Drive Enclosure (with Nema 5-15P LineCord) |
| Tape enclosure adapters (with cables) | |
| 44E8869 | USB Enclosure Adapter Kit |
| 40K2599 | SAS Enclosure Adapter Kit |
| Internal backup drives supported by external tape enclosures | |
| 46C5364 | IBM RDX Removable Hard Disk Storage System - Internal USB 160 GB Bundle |
| 46C5387 | IBM RDX Removable Hard Disk Storage System - Internal USB 320 GB Bundle |
| 46C5388 | IBM RDX Removable Hard Disk Storage System - Internal USB 500 GB Bundle |
| 46C5399 | IBM DDS Generation 5 USB Tape Drive |
| 39M5636 | IBM DDS Generation 6 USB Tape Drive |
| 43W8478 | IBM Half High LTO Gen 3 SAS Tape Drive |
| 44E8895 | IBM Half High LTO Gen 4 SAS Tape Drive |
| 49Y9898 | IBM Half High LTO Gen 5 Internal SAS Tape Drive |

Table 25. External backup options (Part 2)

| Part number | Description |
|------------------------|---|
| External backup units* | |
| 362516X | IBM RDX Removable Hard Disk Storage System - External USB 160 GB Bundle |
| 362532X | IBM RDX Removable Hard Disk Storage System - External USB 320 GB Bundle |
| 362550X | IBM RDX Removable Hard Disk Storage System - External USB 500 GB Bundle |
| 3628L3X | IBM Half High LTO Gen 3 External SAS Tape Drive (with US line cord) |
| 3628L4X | IBM Half High LTO Gen 4 External SAS Tape Drive (with US line cord) |
| 3628L5X | IBM Half High LTO Gen 5 External SAS Tape Drive (with US line cord) |
| 3628N3X | IBM Half High LTO Gen 3 External SAS Tape Drive (without line cord) |
| 3628N4X | IBM Half High LTO Gen 4 External SAS Tape Drive (without line cord) |
| 3628N5X | IBM Half High LTO Gen 5 External SAS Tape Drive (without line cord) |
| 3580S3V | System Storage TS2230 Tape Drive Express Model H3V |
| 3580S4V | System Storage TS2240 Tape Drive Express Model H4V |
| 3580S5E | System Storage TS2250 Tape Drive Express Model H5S |
| 3580S5X | System Storage TS2350 Tape Drive Express Model S53 |
| 3572S4R | TS2900 Tape Library with LTO4 HH SAS drive & rack mount kit |
| 3572S5R | TS2900 Tape Library with LTO5 HH SAS drive & rack mount kit |
| 35732UL | TS3100 Tape Library Model L2U Driveless |
| 35734UL | TS3200 Tape Library Model L4U Driveless |
| 46X2682† | LTO Ultrium 5 Fibre Channel Drive |
| 46X2683† | LTO Ultrium 5 SAS Drive Sled |
| 46X2684† | LTO Ultrium 5 Half High Fibre Drive Sled |
| 46X2685† | LTO Ultrium 5 Half High SAS Drive Sled |
| 46X6912† | LTO Ultrium 4 Half High Fibre Channel Drive Sled |
| 46X7117† | LTO Ultrium 4 Half High SAS DriveV2 Sled |
| 46X7122† | LTO Ultrium 3 Half High SAS DriveV2 Sled |

* Note: The external tape drives listed can be ordered through System x sales channel. Server may support other IBM tape drives that are not listed in this table. Refer to IBM System Storage Interoperability Center for further information.

† Note: These part numbers are the tape drives options for 35732UL and 35734UL.

For more information, see the list of IBM Redbooks Product Guides in the Backup units category:
<http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=tape>

Top-of-rack Ethernet switches

The server supports the top-of-rack Ethernet switches from IBM System Networking listed in the following table.

Table 26. IBM System Networking - Top-of-rack switches

| Part number | Description |
|--|--|
| IBM System Networking - 1 Gb top-of-rack switches | |
| 0446013 | IBM System Networking RackSwitch G8000R |
| 7309CFC | IBM System Networking RackSwitch G8000F |
| 7309CD8 | IBM System Networking RackSwitch G8000DC |
| 7309G52 | IBM System Networking RackSwitch G8052R |
| 730952F | IBM System Networking RackSwitch G8052F |
| 427348E | IBM Ethernet Switch J48E |
| 6630010 | Juniper Networks EX2200 24 Port |
| 6630011 | Juniper Networks EX2200 24 Port with PoE |
| 6630012 | Juniper Networks EX2200 48 Port |
| 6630013 | Juniper Networks EX2200 48 Port with PoE |
| IBM System Networking - 10 Gb top-of-rack switches | |
| 7309DRX | IBM System Networking RackSwitch G8264CS (Rear to Front) |
| 7309DFX | IBM System Networking RackSwitch G8264CS (Front to Rear) |
| 7309BD5 | IBM System Networking RackSwitch G8124DC |
| 7309BR6 | IBM System Networking RackSwitch G8124ER |
| 7309BF7 | IBM System Networking RackSwitch G8124EF |
| 7309G64 | IBM System Networking RackSwitch G8264R |
| 730964F | IBM System Networking RackSwitch G8264F |
| 7309CR9 | IBM System Networking RackSwitch G8264TR |
| 7309CF9 | IBM System Networking RackSwitch G8264TF |
| 0719410 | Juniper Networks EX4500 - Front to Back Airflow |
| 0719420 | Juniper Networks EX4500 - Back to Front Airflow |
| IBM System Networking - 40 Gb top-of-rack switches | |
| 8036ARX | IBM System Networking RackSwitch G8316R |
| 8036AFX | IBM System Networking RackSwitch G8316F |

For more information, see the list of IBM Redbooks Product Guides in the Top-of-rack switches category: <http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=tor>

Uninterruptible power supply units

The server supports attachments to the uninterruptible power supply (UPS) units listed in the following table.

Table 27. Uninterruptible power supply units

| Part number | Description |
|------------------|--|
| Rack-mounted UPS | |
| 21304RX | IBM UPS 10000XHV |
| 53951AX | IBM 1500VA LCD 2U Rack UPS (100V/120V) |
| 53951KX | IBM 1500VA LCD 2U Rack UPS (230V) |
| 53952AX | IBM 2200VA LCD 2U Rack UPS (100V/120V) |
| 53952KX | IBM 2200VA LCD 2U Rack UPS (230V) |
| 53953AX | IBM 3000VA LCD 3U Rack UPS (100 V/120 V) |
| 53953JX | IBM 3000VA LCD 3U Rack UPS (200 V/208 V) |
| 53956AX | IBM 6000VA LCD 4U Rack UPS (200 V/208 V) |
| 53956KX | IBM 6000VA LCD 4U Rack UPS (230 V) |

For more information, see the list of IBM Redbooks Product Guides in the Power infrastructure category: <http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=power>

Power distribution units

The server supports attachments to the power distribution units (PDUs) listed in the following table.

Table 28. Power distribution units (part 1)

| Part number | Description |
|-----------------------------|---|
| Switched and Monitored PDUs | |
| 46M4002 | IBM 1U 9 C19/3 C13 Active Energy Manager DPI® PDU |
| 46M4003 | IBM 1U 9 C19/3 C13 Active Energy Manager 60A 3 Phase PDU |
| 46M4004 | IBM 1U 12 C13 Active Energy Manager DPI PDU |
| 46M4005 | IBM 1U 12 C13 Active Energy Manager 60A 3 Phase PDU |
| 46M4167 | IBM 1U 9 C19/3 C13 Switched and Monitored 30A 3 Phase PDU |
| 46M4116 | IBM 0U 24 C13 Switched and Monitored 30A PDU |
| 46M4119 | IBM 0U 24 C13 Switched and Monitored 32A PDU |
| 46M4134 | IBM 0U 12 C19/12 C13 Switched and Monitored 50A 3 Phase PDU |
| 46M4137 | IBM 0U 12 C19/12 C13 Switched and Monitored 32A 3 Phase PDU |
| Enterprise PDUs | |
| 71762MX | IBM Ultra Density Enterprise PDU C19 PDU+ (WW) |
| 71762NX | IBM Ultra Density Enterprise PDU C19 PDU (WW) |
| 71763MU | IBM Ultra Density Enterprise PDU C19 3 Phase 60A PDU+ (NA) |
| 71763NU | IBM Ultra Density Enterprise PDU C19 3 Phase 60A PDU (NA) |
| 39M2816 | IBM DPI C13 Enterprise PDU without linecord |
| 39Y8923 | DPI 60A Three Phase C19 Enterprise PDU with IEC309 3P+G (208 V) fixed line cord |
| 39Y8941 | DPI Single Phase C13 Enterprise PDU without line cord |
| 39Y8948 | DPI Single Phase C19 Enterprise PDU without line cord |
| Front-end PDUs | |
| 39Y8934 | DPI 32 amp/250 V Front-end PDU with IEC 309 2P+Gnd connector |
| 39Y8935 | DPI 63amp/250 V Front-end PDU with IEC 309 2P+Gnd connector |
| 39Y8938 | 30 amp/125 V Front-end PDU with NEMA L5-30P connector |
| 39Y8939 | 30 amp/250 V Front-end PDU with NEMA L6-30P connector |
| 39Y8940 | 60 amp/250 V Front-end PDU with IEC 309 60A 2P+N+Gnd connector |

Table 28. Power distribution units (part 2)

| Part number | Description |
|----------------|---|
| Universal PDUs | |
| 39Y8951 | DPI Universal Rack PDU with US LV and HV line cords |
| 39Y8952 | DPI Universal Rack PDU with CEE7-VII Europe LC |
| 39Y8953 | DPI Universal Rack PDU with Denmark LC |
| 39Y8954 | DPI Universal Rack PDU with Israel LC |
| 39Y8955 | DPI Universal Rack PDU with Italy LC |
| 39Y8956 | DPI Universal Rack PDU with South Africa LC |
| 39Y8957 | DPI Universal Rack PDU with UK LC |
| 39Y8958 | DPI Universal Rack PDU with AS/NZ LC |
| 39Y8959 | DPI Universal Rack PDU with China LC |
| 39Y8962 | DPI Universal Rack PDU (Argentina) |
| 39Y8960 | DPI Universal Rack PDU (Brazil) |
| 39Y8961 | DPI Universal Rack PDU (India) |
| 0U Basic PDUs | |
| 46M4122 | IBM 0U 24 C13 16A 3 Phase PDU |
| 46M4125 | IBM 0U 24 C13 30A 3 Phase PDU |
| 46M4128 | IBM 0U 24 C13 30A PDU |
| 46M4131 | IBM 0U 24 C13 32A PDU |
| 46M4140 | IBM 0U 12 C19/12 C13 60A 3 Phase PDU |
| 46M4143 | IBM 0U 12 C19/12 C13 32A 3 Phase PDU |

For more information, see the list of IBM Redbooks Product Guides in the Power infrastructure category:
<http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=power>

Rack cabinets

The server supports the rack cabinets listed in the following table.

Table 29. Rack cabinets

| Part number | Description |
|-------------|---|
| 201886X | IBM 11U Office Enablement Kit |
| 93072PX | IBM 25U Static S2 Standard Rack |
| 93072RX | IBM 25U Standard Rack |
| 93074RX | IBM 42U Standard Rack |
| 93074XX | IBM 42U Standard Rack Extension |
| 93084EX | IBM 42U Enterprise Expansion Rack |
| 93084PX | IBM 42U Enterprise Rack |
| 93604EX | IBM 42U 1200 mm Deep Dynamic Expansion Rack |
| 93604PX | IBM 42U 1200 mm Deep Dynamic Rack |
| 93614EX | IBM 42U 1200 mm Deep Static Expansion Rack |
| 93614PX | IBM 42U 1200 mm Deep Static Rack |
| 93624EX | IBM 47U 1200 mm Deep Static Expansion Rack |
| 93624PX | IBM 47U 1200 mm Deep Static Rack |
| 99564RX | IBM S2 42U Dynamic Standard Rack |
| 99564XX | IBM S2 42U Dynamic Standard Expansion Rack |

For more information, see the list of IBM Redbooks Product Guides in the Rack cabinets and options category:

<http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=rack>

Rack options

The server supports the rack console switches and monitor kits listed in the following table.

Table 30. Rack options

| Part number | Description |
|---------------------------------|---|
| Monitor kits and keyboard trays | |
| 172317X | 1U 17in Flat Panel Console Kit |
| 172319X | 1U 19in Flat Panel Console Kit |
| Console switches | |
| 1754D2X | IBM Global 4x2x32 Console Manager (GCM32) |
| 1754D1X | IBM Global 2x2x16 Console Manager (GCM16) |
| 1754A2X | IBM Local 2x16 Console Manager (LCM16) |
| 1754A1X | IBM Local 1x8 Console Manager (LCM8) |

For more information, see the list of IBM Redbooks Product Guides in the Rack cabinets and options category:

<http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=rack>

IBM Global Financing

IBM Global Financing can help you obtain the IT solution you need while preserving funding for other strategic investments and optimizing cash flow. Our Fair Market Value (FMV) lease helps ensure that you have the latest IBM technology and with our mid-lease upgrade capability, you can increase the capacity of the system with little to no change in monthly payments. At the end of the lease, take advantage of our flexible end-of-lease options to fit your changing business needs. IBM Global Financing has the breadth and depth of offerings, longevity, proven success and global reach to help you develop a robust financing and asset management strategy that provides you the opportunity to leverage new technologies and turn your ambitious vision into a tangible solution.

Here are some other reasons why working with us makes solid financial sense:

- Expand your purchasing power—Affordable monthly payments allow you to change the technology acquisition discussion from “what can I afford right now” to “what solution is really right for my business.” IBM Global Financing allows you to expand your purchase power to get you the right solution.
- Accelerate your project’s cash flow break-even point—Acquire your IBM technology today and begin to realize its benefits now. An FMV lease can help you get the solution you need now, with low monthly payments that better align upfront costs with the anticipated return on investment from the technology.
- Easy to acquire with affordable rates—We offer one-stop shopping for a total IT solution, so you can acquire IBM hardware, software, services and the financing you need—from one IT provider.

Plus, we provide simple, easy-to-understand contracts and quick approvals. As the world’s largest IT financing provider, with an asset base of US\$35.8 billion and over 125,000 customers, IBM Global Financing offers highly competitive rates that promote low total cost of ownership and low monthly payments.

IBM Global Financing operates in more than 50 countries. Go to <http://ibm.com/financing> for financing options in your country and to contact a local financing specialist.

IBM Global Financing offerings are provided through IBM Credit LLC in the United States and other IBM subsidiaries and divisions worldwide to qualified commercial and government clients. Rates and availability subject to client’s credit rating, financing terms, offering type, equipment and product type and options, and may vary by country. Non-hardware items must be one-time, non-recurring charges and are financed by means of loans. Other restrictions may apply. Rates and offerings are subject to change, extension or withdrawal without notice and may not be available in all countries. Please contact your local IBM Global Financing representative for additional detail.

Related publications and links

For more information see these resources:

- IBM System x3650 M3 product page
<http://www.ibm.com/systems/x/hardware/rack/x3650m3/index.html>
- *Installation and User's Guide - IBM System x3650 M3 (4255, 7376, 7945) and IBM Smart Analytics System 5600 (7949)*
<http://ibm.com/support/entry/portal/docdisplay?Indocid=MIGR-5083595>
- *Problem Determination and Service Guide - IBM System x3650 M3 (4255, 7376, 7945) and IBM Smart Analytics System 5600 (7949)*
<http://ibm.com/support/entry/portal/docdisplay?Indocid=MIGR-5083596>
- ServerProven hardware compatibility page for the x3650 M3
<http://www.ibm.com/systems/info/x86servers/serverproven/compat/us/xseries/7945.html>
- IBM Redbooks Product Guides for IBM System x options
<http://www.redbooks.ibm.com/portals/systemx?Open&page=ataglance>
- *IBM System x® Configuration and Options Guide*
<http://www.ibm.com/systems/xbc/cog/>
- *IBM Power Configurator for System x, BladeCenter, and Flex System*
<http://ibm.com/systems/bladecenter/resources/powerconfig.html>
- IBM Standalone Solutions Configuration Tool
<http://ibm.com/systems/x/hardware/configtools.html>
- *xREF: IBM x86 Server Reference*
<http://www.redbooks.ibm.com/xref>
- IBM System x Support Portal
<http://ibm.com/support/entry/portal/>
http://ibm.com/support/entry/portal/Downloads/Hardware/Systems/System_x/System_x3650_M3

Notices

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service. IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing, IBM Corporation, North Castle Drive, Armonk, NY 10504-1785 U.S.A.

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you. This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk. IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you. Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products. This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurement may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs.

© Copyright International Business Machines Corporation 2010. All rights reserved.

Note to U.S. Government Users Restricted Rights -- Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

This document was created or updated on April 9, 2013.

Send us your comments in one of the following ways:

- Use the online **Contact us** review form found at:
ibm.com/redbooks
- Send your comments in an e-mail to:
redbook@us.ibm.com
- Mail your comments to:
IBM Corporation, International Technical Support Organization
Dept. HYTD Mail Station P099
2455 South Road
Poughkeepsie, NY 12601-5400 U.S.A.

This document is available online at <http://www.ibm.com/redbooks/abstracts/tips0805.html> .

Trademarks

IBM, the IBM logo, and ibm.com are trademarks or registered trademarks of International Business Machines Corporation in the United States, other countries, or both. These and other IBM trademarked terms are US registered or common law trademarks owned by IBM at the time this information was published. Such trademarks may also be registered or common law trademarks in other countries. A current list of IBM trademarks is available on the Web at <http://www.ibm.com/legal/copytrade.shtml>. The following terms are trademarks of the International Business Machines Corporation in the United States, other countries, or both:

Calibrated Vectors Cooling™
DPI®
IBM Systems Director Active Energy Manager™
IBM®
Redbooks®
Redpaper™
Redbooks (logo)®
ServerProven®
ServicePac®
System Storage®
System x®

The following terms are trademarks of other companies:

Microsoft, Windows, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Intel Xeon, Intel, Intel logo, Intel Inside logo, and Intel Centrino logo are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Linux is a trademark of Linus Torvalds in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>