
Self-clean system



Cleaning method:

- 1.Clean the steam engine regularly at least once by every 2weeks or after using 20 times.
- 2.Inject citric acid as main cleaning liquid, add 1.5L each time.after 10 minutes, turn on and When the system turns on, press button to start the steam function for about 30seconds and then shut down the system. After vent the stagnant water, repeat 2 or 3 times.
- 3.CAUTION: The system must be shut down before injecting cleaning liquid .

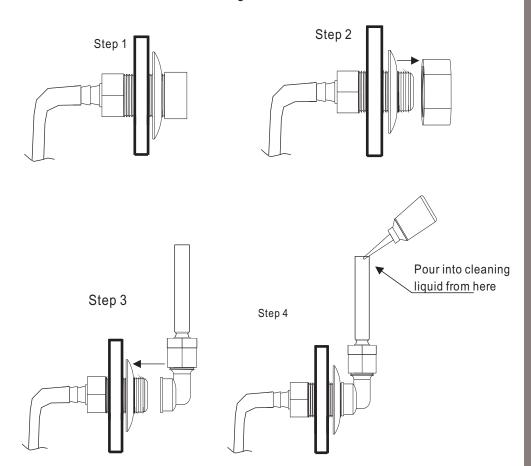

INSTALL DIRECTION



YH300



YH301



YH302



YH300A



YH301A



YH302A

Your best choice!

Dear users:

Thanks for choosing our products, for the purpose of safety, please read this manual carefully before use.

The instruction manual be the same with the following steam room:

YH300/300A YH301/301A YH302/302A

ATTENTIONS

- 1.It is recommended to fix a reliable leakage protector and earth line. Test the leakage protector every time before use.
- 2.Drunk, high blood pressure, heart disease people are not allowed to use this product, Children should be guided by adults.
- 3. Adjust the water temperature before taking shower, don't spray hot water to your body. Steam outlet and drain pipe may be in high temperature, keep away from them.
- 4. Watch out to advoid falling down when entering the steam room, don't put hands into the door gap.
- 5. Please don't use hard wares to knock at the steam room.
- 6.Clean the tray after taking shower, to remove the soap or foam on the tray.
- 7.If the glass seal separate from the door, please refix it to advoid leaking water.
- 8. Use the tooth paste to clean the dirt on the tray.
- 9. Keep the tray clean to advoid blocking the drain.
- 10. Please don't hang heavy articles on the steam room or handrail.
- 11. After use, please turn off water and power supply, to advoid long time working of the product.
- 12.Please dispose of the product according to the local law when it is out of use.
- 13.Please contact the dealer if you have any problems.

TECHNIQUE PARAMETER

Voltage	Frequency	Water Volatge	Power of steam generator
AC110V	60Hz	0.1~0.2Mpa	2.65KW

Packing list

1 deking 11st									
Packing 1	two pieces of glass body, two pieces of fixed glass door, one piece of sliding glass door, two pieces of corner plastic seal, six pieces of water resist strip, two pieces of magnetic strip, two pieces of single side plastic seal.								
Packing 2	one tray, one roof, one piece of mirror, one piece of handle.								
Spare parts list	one set shower, one set of glass towel shelf, two sets of hinge, sixty pieces of corner holder, eight pieces of corner holder cover, twenty-four pieces of decorating cover, one instruction, M6*20 screw(2), M6*16 screw(1), ST5*25 screw(4), ST4*20 screw(3), two pieces of screw(7).								
	SCREW (1)	M6x16	(@IIIII)	8pcs					
	SCREW (2)	M6x20		16pcs					
	SCREW (3)	ST4x20	4	10pcs					
	SCREW (4)	St5x25	(10pcs					
	SCREW (5)	corner holder		8pcs					
	SCREW (6)	corner holder		8pcs					
	SCREW (7)	mirror nail		2pcs					


Attention:

The machine must be fixed in the circuit which protected by creepage protection and should be well-connected with the ground. Nontechnical people can not be fixed or removed at random.

6. Technical parameter

Model	Voltage	Current	Power	protecting electrifying	Waterproof Grade
KL-824	110V	25A	2650W		lp4
Top light	Sidelight	Fan	Water inlet valve		
20W	5W	3.5W	6W	7W	
AC12V	AC12V	DC12V	DC12V	DC12V	

302/302A STRUCTURE SKETCH (Other models can refer to this model)

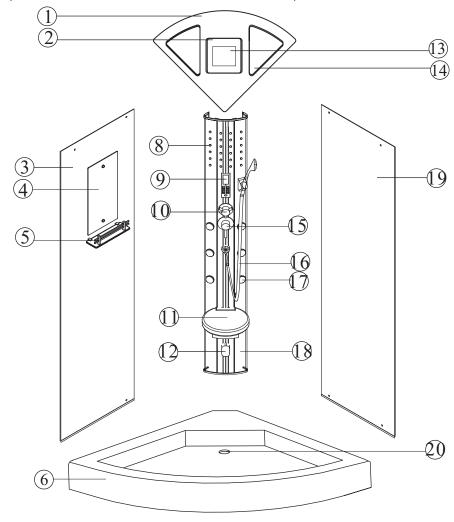

2.top lamp 3.side glass body 4.mirror

5.glass rack

1.ABS roof

6.tray

8.wall lamp 9.control panel

10.shift valve

11.seat

12.steam outlet

13.top shower

14.exhaust fan 15.hot/cold water mixer 16.hand held shower

17.back jet


18. Aluminium board

19.side glass body

20.drainage

302/302A ACCESSORIES

03

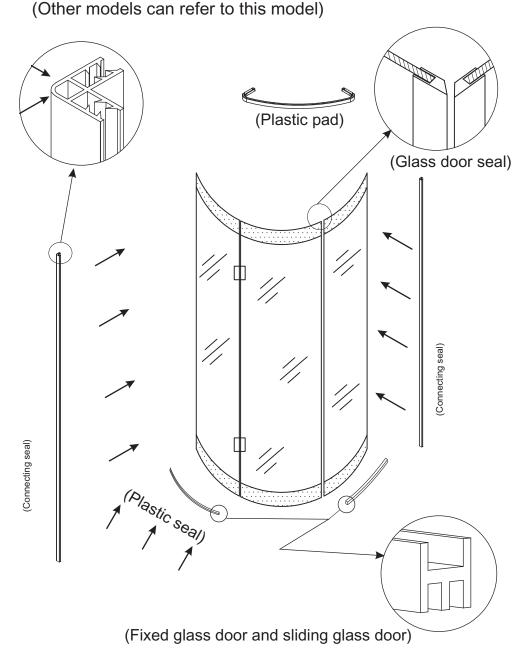

(1) The electrical pitch

Press ① pitch can open the machine, the temperature is the room temperature. The time will show 30m. At the same time, it will open the ceiling lamp. Press ② again will close all the functions. (After the closure of the machine, the water case will drainfor 2 minutes)

(2) The application of the back lamp

Press, the sidelight is on. Press again, the ceiling lamp is out, press a third press, the sidelight is out too.


3) The steam function

Press, startup the steam function, the water case will pump water automati-cally. After 60minutes or so, it will generate steam. (When the water case is lack ofwater, the controller will replenish automatically)

(4) The air draft function


Under the condition of turnning on, press can start up air draft function, pressagain will colse it.

- (5) The setting of time or temperature
 - 1. Press pitch can adjust the time from 1-99.
- 2. Press pitch can adjust the temperature from 30-60.

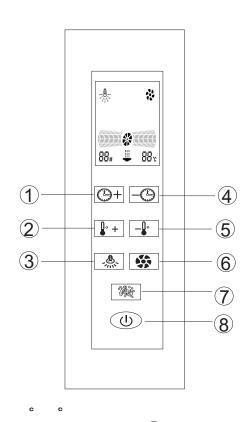


- 1 Time adjustment pitch+
- 2 Temperature adjustment pitch+
- (3) CeilingLamp/Back Lamp pitch
- 4 Time adjustment pitch-


- 5 Temperature adjustment pitch-
- 6 Fan Pitch
- Steam Pitch
- Main Cock Pitch

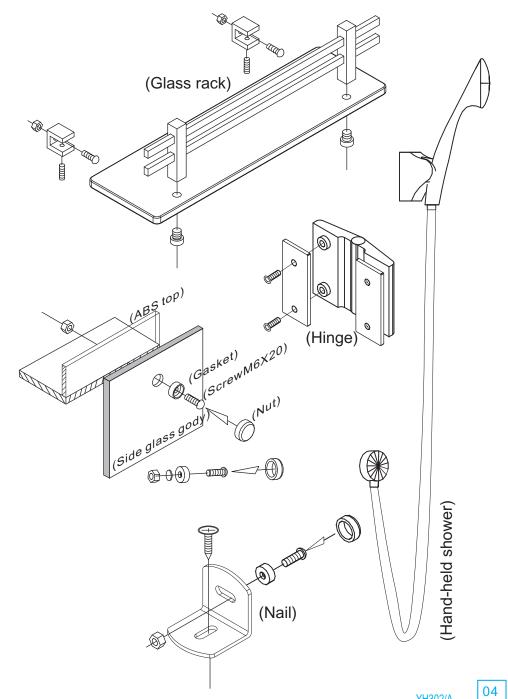


THE DRAFT AND SIZE FOR THE DIFFERENT MODELS


Model:YH300(clear glass) Model:YH300A(blue glass) Size:1200X900X2150mm





Model:YH301(clear glass) Model:YH301A(blue glass) Size:900X900X2150mm 1000X1000X2150mm



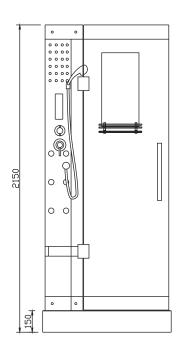


8. Install the gliding glass door

to be horizontal by a horizontal meter. 2.Fasten the up and down nail (no space left), at the same time keep the back and side glass body vertical to the tray.


1. Adjust the tray



4. Put the sliding glass door on a wood a little higher than the tray, then fix it with the hinge.

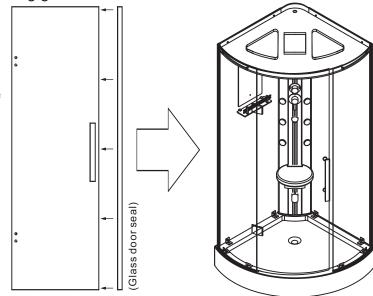

Water and electric circuit sketch

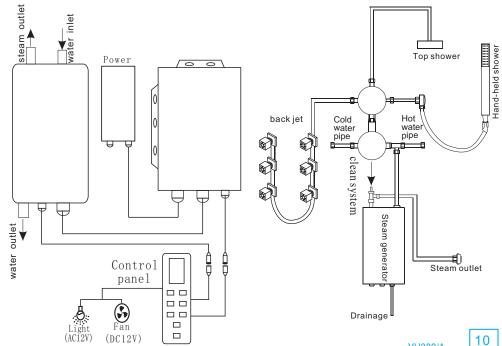


INSTALLATION PROCESS OF 302/302A (Other models can refer to this model)


1. Install the bottom tray:


If the ground is not horizontal, please regulate the screw of the bottom tray, make the bottom tray and ground keep competence.


2. Install the aluminium panel and the back glass body

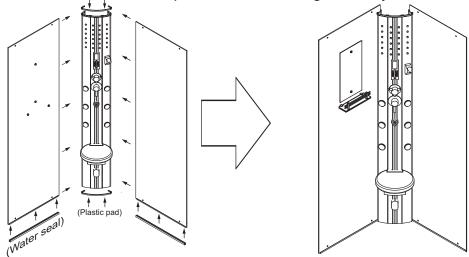


3. Installation of body room together with bottom tray

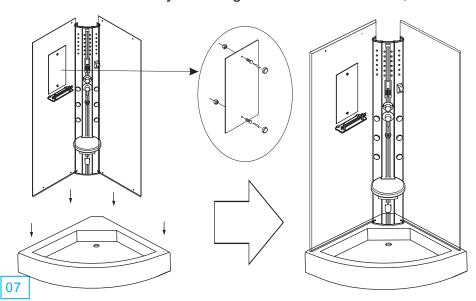







5, Install the fixed glass door

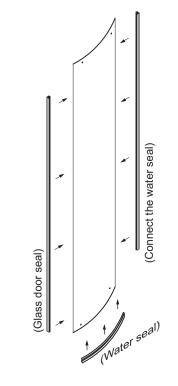


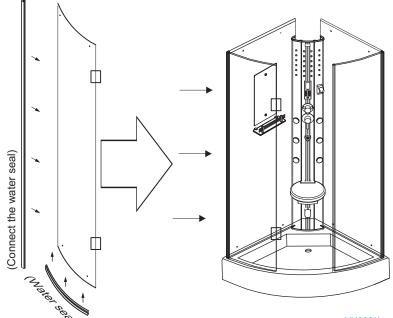


6, Install the ABS top

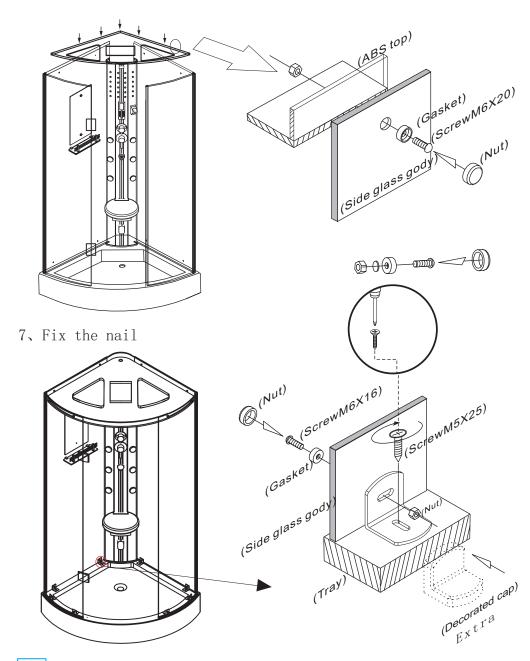


Model:YH302(clear glass) Modle:YH302A(blue glass) Size:900X900X2150mm 960X960X2150mm



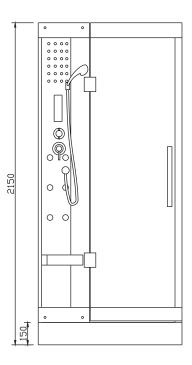

INSTALLATION GUIDE



- 1. The plumbing and the circuit of this product must be installed by the qualified mechanic or the professional personnel who is appointed by the distributor. It is recommended to install the general switch of the power supply and the leakage protector.
- 2. The socket of the power supply must be installed above the steam generator; the power source wire must be long enough to reach waterproof area; the distance from the socket to the ground should be more than 1800mm.
- 3.It is recommended to install the general switch for cold and hot water supply, and connect the drain pipe to the limbers.
- 4. After the position is confirmed, assemble the steam room according to the installation sketch.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com