

GENERAL GUIDE

- Press © to change from mode to mode.
- In any mode (except when making any settings), press ① to illuminate the display

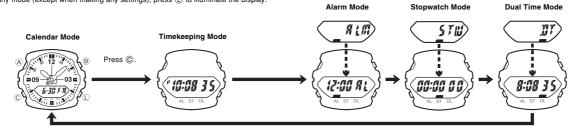

CALENDAR MODE

To set the date

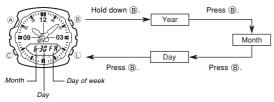


- The day of the week is automatically set in accordance with the date.
 The date can be set with the range of January 1,1995 to December 31, 2039.
 If you do not operate any button for a few minutes while a selection is flashing, the flashing stops and the watch goes back to the Calendar Mode automatically.

TIMEKEEPING MODE

The minutes hand advances 1/3 of a minute each time the second's count in the digital display reaches 00, 20 and 40 seconds.

To set the digital time

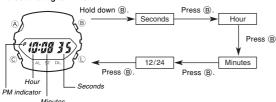

- 1. In the Timekeeping Mode, hold down (B) for about two seconds, until "ADJ" and then the second's digits flash on the display. Keep (B) depressed until the second's
- digits flash.

 2. While the second's digits are selected (flashing), press © to reset the seconds to 00. If you press © while the second's count is in the range of 30 to 59, the seconds are reset to 00 and 1 is added to the minutes. If the second's count is in the range of 00 to 29, the minute's count is unchanged.

 3. Press ® 10 move the selection around the display in the above sequence.

 4. While hour or minutes are selected (flashing), press © to increase the setting. Holding down © changes the current setting at high speed. While the 12/24-hour setting is selected, press © to switch between the two formats.

 If you do not operate any button for a few minutes while a selection is flashing, the flashing stops and the watch goes back to the Timekeeping Mode automatically.

Hand setting
Each press of ♠ advances the hands 20 seconds. Holding down ♠ advances the

Note that the hands can be advanced only and cannot be moved back. Take care so you do not go past the setting you want to make.

ABOUT THE BACKLIGHT

In any mode (except when making any settings), press $\ \ \bigcirc$ to illuminate the display

- for about two seconds.


 The backlight of this watch illuminates both the digital display and analog face.

 The illumination provided by the backlight may be hard to see when viewed under direct sunlight.

 The backlight automatically stops illuminating whenever an alarm sounds.

 Frequent use of the backlight shortens battery life.

ALARM MODE

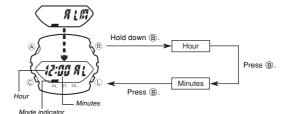

When an alarm is turned on, an alarm tone sounds for 20 seconds at the preset time

To set the alarm time

- 1. In the Alarm Mode, hold down (B) for about two seconds, until "ADJ" and then the hour digits flash on the display. Keep (B) depressed until the hour digits flash.

 2. Press (C) to increase the setting. Holding down (C) changes the current setting at
- high speed.
- nign speed.

 3. Press (§) to change the selection in the above sequence.

 The format (12-hour and 24-hour) of the alarm time matches the format you select
- The format (12-hour and 24-hour) of the alarm time matches the format you select for normal timekeeping.
 When setting the alarm time using the 12-hour format, take care to set the time correctly as morning or afternoon.
 If you do not operate any button for a few minutes while a selection is flashing, the flashing stops and the watch goes back to the Alarm Mode automatically.
 The alarm is turned on automatically whenever you change the alarm time setting.

To stop the alarm
Press any button to stop the alarm after it starts to sound.


To switch the daily alarm on and off In the Alarm Mode, press B to turn the daily alarm on and off.



To test the alarm

Hold down © while in any mode to sound the alarm.

STOPWATCH MODE




3. To reset the stopwatch time to all zeros, hold down (B) 1/100 seconds After the first hour



DUAL TIME MODE

The Dual Time Mode lets you keep track of the time in another time zone.

To set the Dual Time

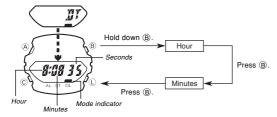

- 1. In the Dual Time Mode, hold down (a) for about two seconds, until "ADJ" and then the hour digits flash on the display. Keep (a) depressed until the hour digits flash.

 2. Press (b) to increase the setting. Holding down (c) changes the current setting at high speed.

 3. Press (a) to move the selection around the display in the above sequence.

 1. The format (12-hour and 24-hour) of the Dual Time matches the format you select for normal timekeeping.

 1. The second's count is synchronized with the second's count in the Timekeeping Mode.

 1. If you do not operate any button for a few minutes while a selection is flashing, the flashing stops and the watch goes back to the Dual Time Mode automatically.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com