User's Guide 5476

F-9

ENGLISH

CASIO

Congratulations upon your selection of this CASIO watch.

E-1

Warning!

- The measurement functions built into this watch are not intended for taking measurements that require professional or industrial precision. Values produced by this watch should be considered as reasonable representations only.When engaging in mountain climbing or other activities in which losing your way
- When engaging influences and influences of the activities in which its shift you were can create a dangerous or life-threatening situation, always use a second compass to confirm direction readings.
 Note that CASIO COMPUTER CO., LTD. assumes no responsibility for any damage or loss suffered by you or any third party arising through the use of this product or its malfunction.

Important!

. This manual provides a brief overview of your watch.

E-2


Configuring Home City, Time and Date Settings

- Configure Home City and summer time settings first. After that, configure time and date settings
- 1. In the Timekeeping Mode, hold down (A) until ADJ appears in the lower display. When you release (A) (after ADJ appears), SET will be flashing in the upper display.
- 2. Press (D) to move the flashing in the sequence shown below to select a setting.

Home City and Summer Time	Time and Date
City Code DST	12/24-Hour Format Seconds Hour Minutes
	v
	Deperation On/Off

E-4

Mode Selection and Operations

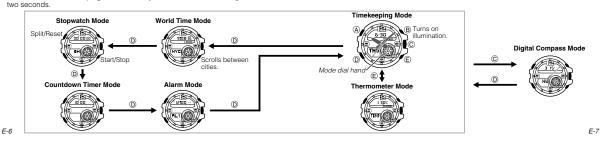

Misaligned Hands

F-8

The analog hands may become misaligned as described below if the watch is exposed to strong magnetism, impact, or other abnormal conditions. • Analog time and digital time are different from each other If this happens, refer to "Hand Home Position Adjustment" in the Operation Guide available at the CASIO website and adjust the hand alignment.

Specifications

Accuracy at normal temperature: ±15 seconds a month

- Accuracy at normal temperature: ±10 seconds a month Digital Timekeeping: Hour, minutes, seconds, p.m. (P), month, day, day of the week Time format: 12-hour and 24-hour Calendar system: Full Auto-calendar pre-programmed from the year 2000 to 2099 Other: Home City code (can be assigned one of 48 city codes); standard time / daylight saving time (summer time)
- Analog Timekeeping: Hour, minutes (hand moves every 10 seconds), seconds

Digital Compass: 20 seconds continuous readings; 16 directions; Angle value 0° to 359°; Hand indication of north; Calibration (bidirectional); Magnetic declination correction; Bearing Memory Thermometer:

Measurement and display range: -10.0 to 60.0°C (or 14.0 to 140.0°F) Display unit: 0.1°C (or 0.2°F) Measurement timing: Every five seconds in the Thermometer Mode Other: Calibration; Selectable measurement unit

3. Use (E) and (B) to change the selected setting

For a full Operation Guide and Q&A

website below.

information about this product, go to the

http://world.casio.com/manual/wat/

Screen	To do this:	Do this:
TYO: TOKYO	Change the city code	Use (East) and (B) (West).
	Toggle between daylight saving time (ON) and standard time (OFF).	Press (E).
12H	Toggle between 12-hour (12H) and 24-hour (24H) timekeeping.	Press (E).
36	Reset the seconds to 00 (If the current seconds count is between 30 and 59, one is added to the minute count).	Press (E).
P 10:08 Change the hour or minutes		Use (E) (+) and (B) (-).
20 16 6-30	Change the year, month, or day	
CU 16 5-30 Change the year, month, or day		

Press (A) to exit the setting mode

E-5

E-3

User's Guide 5476

CASIO

Bearing Sensor Precision:

I'll g Sensor Precision. Direction: Wilhin ±15° Values are guaranteed for a temperature range of -10°C to 40°C (14°F to 104°F). North indicated by second hand: Error within ±20°.

Temperature Sensor Precision: ±2°C (±3.6°F) in range of −10°C to 60°C (14.0°F to 140.0°F) World Time: 48 cities (31 time zones) Other: daylight saving time/standard time

Other: daylight saving time/statistic = ==== **Stopwatch:** Measuring unit: 1/100 second Measuring capacity: 23:59' 59.99" Measuring modes: Elapsed time, split time, two finishes

Countdown Timer: Countdown unit: 1 second Countdown range: 60 minutes Setting ranges: Countdown start time (1 to 60 minutes, 1-minute increments)

E-10


Alarms: 5 daily alarms (with one snooze alarm); Hourly Time Signal Illumination: LED (light-emitting diode); Selectable illumination duration (approximately 1.5 seconds or 3 seconds); Auto light

(approximately 1.5 seconds or 3 seconds); Auto light Other: Button operation tone on/off, Low battery alert Battery: Two silver oxide batteries (Type: SR927W) Approximate battery operating time: 2 years under the following conditions: * 1 illumination operation (1.5 seconds) per day * Alarm: 10 seconds/day * Direction readings: 20 times/month * Temperature readings: Once/week

Frequent use of illumination runs down the battery. Particular care is required when using auto light.

Specifications are subject to change without notice.

E-11

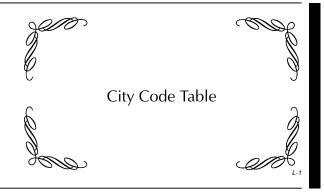

City

_

City Code Table

City Code	City name	UTC Offset/ GMT Differential	City Code
PPG	PAGO PAGO	-11	SCL
HNL	HONOLULU	-10	YHZ
ANC	ANCHORAGE	-9	YYT
YVR	VANCOUVER	-8	RIO
LAX	LOS ANGELES	-0	FEN
YEA	EDMONTON	-7	RAI
DEN	DENVER	-/	UTC
MEX	MEXICO CITY	-6	LIS
CHI	CHICAGO		LON
NYC	NEW YORK	-5	-

L-2

City Code	City name	UTC Offset/ GMT Differential
SEL	SEOUL	+9
TYO	TOKYO	+9
ADL	ADELAIDE	+9.5
GUM	GUAM	+10
SYD	SYDNEY	+10
NOU	NOUMEA	+11
WLG	WELLINGTON	+12

This table shows the city codes of this watch. (As of July 2015) The rules governing global times (GMT differential and UTC offset) and

City name SANTIAGO

HALIFAX

ST. JOHN'S

RIO DE JANEIRO

F. DE NORONHA

PRAIA

LISBON

LONDON

UTC Offset/ GMT Differential

-4

-3.5

-2

-1

0

summer time are determined by each individual country.

MAD	MADRID	
PAR	PARIS	
ROM	ROME	+1
BER	BERLIN	
STO	STOCKHOLM	
ATH	ATHENS	
CAI	CAIRO	+2
JRS	JERUSALEM	
MOW	MOSCOW	+3
JED	JEDDAH	+3
THR	TEHRAN	+3.5
DXB	DUBAI	+4

City name

UTC Offset/ GMT Differential

City Code

Code	City name	GMT Differential
KBL	KABUL	+4.5
KHI	KARACHI	+5
DEL	DELHI	+5.5
KTM	KATHMANDU	+5.75
DAC	DHAKA	+6
RGN	YANGON	+6.5
BKK	BANGKOK	+7
SIN	SINGAPORE	
HKG	HONG KONG	+8
BJS BEIJING		+0
TPE	TAIPEI	

UTC Offset/

L-3

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com