

FRONT

Warranty Information

This product carries a 1 Year Limited Warranty. For the terms and conditions of this warranty, please go to <http://www.iogear.com/support/warranty> or call 1-866-946-4327 (U.S. only) or (949) 453-8782.

Register online at <http://www.iogear.com/register>

Important Product Information

Product Model _____

Serial # _____

Contact

Toll Free 866-9-IOGEAR (USA)
 Phone: 949-453-8782
 23 Hubble
 Irvine, CA 92618 USA
www.iogear.com
support@iogear.com



About Us

- FUN**
IOGEAR offers connectivity solutions that are innovative, fun, and stylish, helping people enjoy daily life using our high technology products.
- GREEN**
IOGEAR is an environmentally conscious company that emphasizes the importance of conserving natural resources. The use of our technology solutions helps reduce electronic waste.
- HEALTH**
IOGEAR supports healthy and fit lifestyles. By integrating products with the latest scientific developments, IOGEAR's solutions enhance the life of end-users.

© 2008 IOGEAR, INC.



QuickStart Guide

Bluetooth® Stereo Audio Transmitter

GBMA211
PART NO. Q1042

Package Contents

- 1 Bluetooth® Stereo Audio Transmitter
- 1 Mini USB 4 Pin Charging Cable
- 1 3.5mm to 1/4" Adapter
- 1 3.5mm Audio Extension Cable
- 1 Full Range Power Adapter
- 1 European Prong Charger
- 1 Quick Start Guide
- 1 Warranty / Registration Card

System Requirements


- Available 3.5mm or 1/4" Audio Jack
- A2DP supported Bluetooth Stereo Headphone or Speaker

BACK

Overview

Start Here!

1. Blue / Red LED
2. ON / OFF Button
3. 3.5mm Audio Connector
4. Mini-USB 4 pin Charger Jack

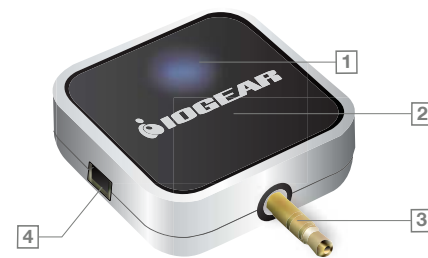

Charging GBMA211

Note: You have to fully charge the batteries for 6 hours before initial usage.

1. Connect the mini USB charging cable to the GBMA211 and any open USB port on your PC. You can also charge GBMA211 via AC adapter.
2. The LED on the GBMA211 will light up in red indicating that it is being charged.
3. When the charging is completed, the red LED will go off.

Note: Please connect the cable directly to your PC and avoid connecting it through other devices, such as a USB hub.

Pairing with GBMA211

1. Hold ON / OFF Button for 7 seconds on your GBMA211 when it is in OFF mode to activate the pairing mode. GBMA211's LED will be flashing blue and red alternately.
2. Activate the pairing mode on your Bluetooth Headset / Headphone. (Please refer to your Bluetooth Headset / Headphone's user manual on how to activate pairing mode.)
3. Wait for the GBMA211's LED to flash blue only to confirm that the two devices are connected to each other. Then you should be able to listen to music through GBMA211 with your Bluetooth Headset / Headphone. (For example, you can test to see if the GBMA211 is paired by plugging the 3.5mm or 1/4" audio connector to your PC's audio output. Then use any audio software to play your music to see you can hear any audio sound from your Bluetooth Headset / Headphone.)

Connecting GBMA211 with audio source

1. Plug GBMA211 into the 3.5mm or 1/4" audio jack of MP3 player or any audio source.



2. Turn on GBMA211.
3. Turn on your Bluetooth Headset / Headphone and wait for the blue LED to flash normally, then the two devices are successfully connected. (If GBMA211 cannot reconnect to any device after turning on for 1 minute, it will turn off automatically. Then please turn off both devices and move the device closer to each other then repeat step 3.)

Note: GBMA211 can only reconnect to the last connected device. If you have paired with another device before the one you currently want to use, please go to Pairing with GBMA211 to re-pair the device.

4. Now, you should be able to listen to music from the MP3 player or any audio source.
5. Use the audio source's Volume Up / Down control button to adjust the volume.

Note: You have to pair GBMA211 and the Bluetooth Headset / Headphone if you are trying to connect them for the first time. After the initial pairing process, GBMA211 will search and re-connect with the Bluetooth Headset / Headphone on standby status. (Please refer to Pairing with GBMA211 if you need to pair your Bluetooth device with GBMA211.)

Operation

Function	Button
ON	Hold ON / OFF for 3 second when it's OFF
OFF	Hold ON / OFF for 6 second when it's ON
Pairing	Hold ON / OFF for 7 second when it's OFF

LED Definition	Description	
Blue LED	Connected	Flash normally
	Waiting to connect	Flash slowly
	Power On	Flash 3 times quickly
Red LED	Charging	On
	Charging completed	Off
	Low battery	Flash quickly every 5 second
Blue and Red LED	Power Off	Flash 3 times quickly
	Pairing Mode	Blue LED and Red LED flash alternately

Note: Before initial usage, we recommend that you fully charge GBMA211 for at least 2 hours.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>