

8W1v2-4 / 8W1v2-8

Subwoofers

owner's manual


Congratulations on your purchase of a JL Audio subwoofer component. Your JL Audio subwoofer is a precision loudspeaker which has been engineered to produce the highest quality sub-bass performance in your vehicle. Authorized JL Audio dealers have extensive technical information for many different applications of your new speaker. They also have the knowledge, skills and tools to build a high-quality enclosure that will maximize the performance of your speaker. We highly recommend that you have your enclosure built by an authorized JL Audio dealer.

Inside you will find specifications and two recommended enclosures for your speaker; one is a sealed enclosure, the other is a ported design. Both types of enclosures will give you excellent sound quality and low-frequency extension. The sealed enclosure is a better choice if space is extremely tight, but the ported enclosure will produce 3dB more output at the same power if you have the extra space to work with.



JL AUDIO 8W1v2-4 / 8W1v2-8

U.S. PATENTS: #5,734,734 #6,501,844 #6,219,431 #D480,709 Other U.S. & Foreign patents pending.

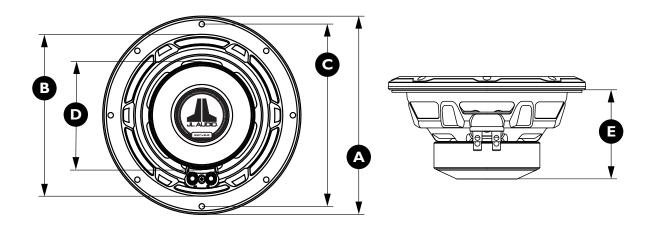

8W1v2 SUBWOOFER PHYSICAL SPECIFICATIONS			
Nominal Diameter:	8 in 200 mm		
Overall Diameter (A):	8.54 in 217 mm		
Mounting Hole Diameter (B):	7.09 in 180 mm		
Bolt Hole Circle (C):	7.85 in 199 mm		
Magnet Diameter (D):	4.54 in 115 mm		
Mounting Depth (E):	3.85 in 98 mm		
Net Weight:	6.3 lbs 2.9 kg		
Driver Displacement:	0.02 ft ³ 0.57 l		


2

SUBWOOFER	8W1v2-4	8W1v2-8		
Free Air Resonance (Fs):	34.55 Hz	36.60 Hz		
Electrical "Q" (Qes):	0.508	0.612		
Mechanical "Q" (Qms):	6.260	6.000		
Total Speaker "Q" (Qts):	0.470	0.555		
Equivalent Compliance (Vas):	0.66 ft³ 8.80	0.63 ft ³ 17.87 l		
One-way, Linear Excursion (Xmax)*:	0.3 in 7.6 mm	0.3 in 7.6 mm		
Efficiency (IW/Im)**:	83.86	83.58		
Effective Piston Area (Sd):	32.67 in² 0.0211 m²	32.67 in ² 0.0211 m ²		
DC Resistance (Re):	4.00 ohm	7.84 ohm		
Nominal Impedance:	4 ohm	8 ohm		
Power Handling (continuous):	150W	150W		

- * Xmax specifications are derived via one-way voice coil overhang method with no correction factors applied.
- ** Efficiency (IW/Im) is <u>not</u> an accurate indicator of a subwoofer's output capability and should not be used as a comparison to other subwoofers to determine which one is "louder"!


All specifications are subject to change without notice.

SUBWOOFER	RECOMMENDED SEALED ENCLOSURES					
	Volume (net int.)	External Dimensions $(\mathbf{W} \text{idth} \times \mathbf{H} \text{eight} \times \mathbf{D} \text{epth})$	F3 (Hz)	Fc (Hz)	Qtc	
8W1v2-4	0.375 ft³ 10.6 l	10.5 in \times 10.5 in \times 10 in 267 mm \times 267 mm \times 254 mm	52.5	57.4	0.78	
8W1v2-8	0.375 ft ³ 10.6 l	10.5 in × 10.5 in × 10 in 267 mm × 267 mm × 254 mm	50.0	60.0	0.91	



SUBWOOFER	RECOMMENDED PORTED ENCLOSURES						
	Volume (net int.)	Enclosure External Dimensions (Width × Height × Depth)	Round Port Specs (Inner Diameter × Length)	Port Information	Tune to: (Hz)	F3 (Hz)	
8W1v2-4	0.50 ft³ 14.2 l	12.5 in × 10 in × 11.5 in 318 mm × 254 mm × 292 mm	2 in × 10 in 51 mm × 254 mm	Round port requires a 90° elbow to fit in the specified enclosure	38	34.7	
8W1v2-8	0.50 ft³ 14.2 l	12.5 in × 10 in × 11.75 in 318 mm × 254 mm × 298 mm	2 in × 14 in 51 mm × 356 mm	Round port requires a 90° elbow to fit in the specified enclosure	33	35.5	

- The enclosure recommendations listed are **external** dimensions which assume the use of **3/4"** (**19mm**) thick material. If you are using **5/8"** (**16mm**) thick material, subtract **1/4"** (**6.5mm**) from each dimension. Do not use any material with a thickness of less than **5/8"** (**16mm**) as this may compromise the rigidity of the enclosure.
- All enclosure volumes listed are net internal volumes!
 Box volume displacement, port displacement and brace displacement must be added to obtain the final gross internal volume. All enclosure dimensions listed have already taken this into account.
- When using two subwoofers in a common enclosure simply double the required volume and, in the case of a ported enclosure, use two times the recommended port(s).
- We recommend the use of this speaker in a biamplified system using high-quality satellite speakers and amplifiers. We do not recommend the use of this subwoofer with a passive crossover (coil), as this type of device will adversely affect performance.






CAUTION !!

Prolonged exposure to sound pressure levels in excess of 100dB can cause permanent hearing loss. This high-performance speaker can exceed this level. Please exercise restraint in its operation in order to preserve your ability to enjoy its fidelity.

When installing a subwoofer in your vehicle, it is extremely important to secure the enclosure firmly. We recommend bolting the enclosure through the metal of the floorpan or the frame of the vehicle with large diameter washers for reinforcement. If an enclosure is not firmly attached, it can become a projectile in a collision. This is particularly important in a hatchback, station wagon, sports utility vehicle, or van.

JL AUDIO **8W1v2-4/8W1v2-8**

RECOMMENDED CONTINUOUS (RMS) POWER RANGE FOR ONE SUBWOOFER DRIVER:



MEDIUM GRAY (MINIMUM):

From a reliability standpoint, this zone represents a very comfortable operating power range for each driver. This level of power will not stress the woofer but will not extract all of its performance potential, either.

Use of less than the minimum power level will not damage the woofer, but may result in unsatisfactory performance.

LIGHT GRAY (OPTIMUM):

This zone represents the best compromise between long-term reliability, high-output and low-distortion performance. This power level is lower than the woofer's continuous power rating (as published in its specifications), but you will still be taking advantage of the woofer's, low-distortion performance range without undue risk of failure.

DARK GRAY (MAXIMUM):

Slightly more SPL will be gained by pushing the power into this zone, but typically not more than 2dB, compared to the light gray zone. The subwoofer driver is designed to operate safely up to this power range, but not beyond. Operate with caution.

BLACK (WARRANTY VOID):

We do not recommend operating woofers at this level of power. In this zone, there is a very high probability that the driver will fail due to excessive heat and/or mechanical stress.

Subwoofer drivers operated at these levels of power are NOT covered under warranty.

JL Audio offers an extensive line of high-performance subwoofer drivers to fit a wide variety of enclosure and power applications. When designing systems with our drivers, it is very important to achieve a good power match between the subwoofer amplifier and the subwoofer driver's capabilities. The power levels listed in the above chart represent continuous (RMS) amplifier power per woofer and assume that the user will regularly make full use of that power without drastically overdriving the amplifier(s). Make sure you factor system impedance and the total number of subwoofers into your calculations. Adhering to these power recommendations will result in systems that are both reliable and enjoyable.

JL AUDIO LIMITED WARRANTY (USA)

Automotive Subwoofer Components

JL AUDIO warrants this speaker to be free of defects in materials and workmanship for a period of one (I) year from the original date of purchase.

Damage caused by the following is not covered under warranty: accident, misuse, abuse, product modification or neglect, failure to follow installation instructions, unauthorized repair attempts, misrepresentations by the seller. This warranty does not cover incidental or consequential damages and does not cover the cost of removing or reinstalling the unit(s). Cosmetic damage due to accident or normal wear and tear is not covered under warranty.

This warranty is not transferable and applies only to the original purchaser of the product from an authorized JL AUDIO dealer. Warranty is voided if the factory-applied product serial number is removed or defaced.

Should service be necessary under this warranty for any reason due to manufacturing defect or malfunction, JL AUDIO will, at its discretion, repair or replace the defective product with new or remanufactured product at no charge.

Any applicable implied warranties are limited in duration to the period of the express warranty as provided herein beginning with the date of the original purchase at retail, and no warranties, whether express or implied, shall apply to this product thereafter. Some states do not allow limitations on implied warranties, therefore these exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

If you need service on your JL AUDIO product:

All warranty returns should be sent to JL AUDIO freight prepaid through an authorized IL AUDIO dealer and must be accompanied by proof of purchase (a copy of the original sales receipt.) Direct returns from consumers or non-authorized dealers will be refused unless specifically authorized by JL AUDIO with a valid return authorization number. Warranty expiration on products returned without proof of purchase will be determined from the manufacturing date code. Coverage may be invalidated as this date is previous to purchase date. Return only defective components. Non-defective items received will be returned freight-collect. Customer is responsible for shipping charges and insurance in sending the product to JL AUDIO. Freight damage on returns is not covered under warranty. Always include proof of purchase (sales receipt).

For Service Information in the U.S.A. please call:

JL Audio customer service: (954) 443-1100 during normal business hours (Eastern Time)

JL Audio, Inc

10369 North Commerce Parkway, Miramar, FL 33025

International Warranties:

Products purchased outside the United States of America are covered only by that country's distributor and not by IL Audio, Inc.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com