



EXT.MW6

6" (16,5cm) Midwoofer



No. of Drivers = 1

--Mechanical Parameters--

Fs = 89 Hz
Qms = 11,9
Vas = 4,92, liters
Cms = 0,21 mm/N
Mms = 14,80 g
Xmax = 6, mm
Xmech = 12, mm
P-Dia = 129,5 mm
Sd = 131,6 sq.cm



--Electrical Parameters--

Qes = 0,61
Re = 3,8 ohms
Le = 0,78 mH
Z = 77, ohms
BL = 7,18 Tm

--Electromech. Parameters--

Qts = 0,58
no = 0,55 %
1-W SPL = 89 dB

Frequency response / Impedance

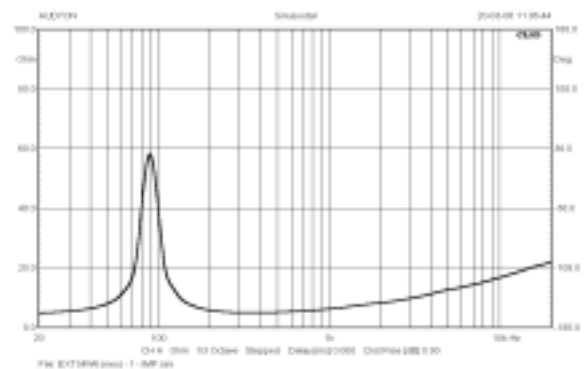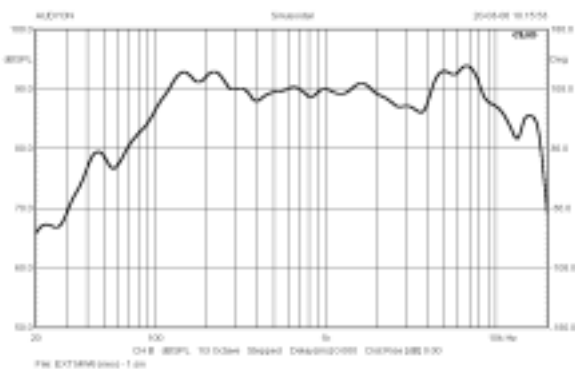

Due to continuing improvement, the features and the specification are subject to change without notice

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>