

Makita®

3/8" 9.6V, 12V & 14.4V CORDLESS DRIVER-DRILLS

COMPACT BODY AND LIGHTWEIGHT DESIGN PROVIDE OPTIMUM BALANCE

- More Torque (up to 260 in.lbs.) for More Versatility
- Industrial Grade Keyless Chuck for Quick and Easy Bit Changes
- 2-Speed Gear Selection with Variable Speed
- True Rubberized Pistol Grip for More Comfort, Control and Reduced Operator Fatigue
- Great for HVAC, Cabinet Installers, Woodworkers, Plumbers, Electrical Contractors and Many Other Applications



9.6V MODELS

6260DWPE

6260DWPLE (Flashlight)

12V MODELS

6270DWPE

6270DWPLE (Flashlight)

14.4V MODELS

6280DWPE

6280DWPLE (Flashlight)


COMPACT

7-9/16"



Compact (7-9/16") and lightweight design for both vertical and horizontal applications

DURABILITY




All metal gear transmission for efficient power and longer tool life

SPEED



2-speed gear selection (0 - 350 RPM or 0 - 1,200 RPM) for matching RPM to the application

TOTAL CONTROL



True variable speed for smooth increase in speed and complete control to match all applications

MORE COMPACT

3/8" 9.6V, 12V & 14.4V CORDLESS DRIVER-DRILLS

Models 6260DWPE/6270DWPE/6280DWPE

Features & Benefits

- Compact tool body and lightweight design provide optimum balance and comfort
- True variable speed (0 – 350 RPM or 0 – 1,200 RPM) for controlled drilling
- 16 torque settings plus drill mode for optimum torque control
- Electric brake for fast stopping of the chuck
- Conveniently located forward/reverse switch for one-handed operation
- 2-speed gear selection for matching RPM to the applications
- Keyless chuck for fast and easy bit changes
- High power-to-weight ratio for efficient drilling
- Ergonomically developed rubberized pistol grip for complete comfort and control



Standard Equipment

6260DWPE & 6260DWPLE

- 2 ea. 9.6V Ni-Cd Battery PA09 (193979-3)
- Universal Charger
- 2 ea. Battery Cover (414938-7)
- Tool Case (824635-1), Model 6260DWPE
- Tool Case (824581-8), Model 6260DWPLE
- Flashlight ML903, Model 6260DWPLE

6270DWPE & 6270DWPLE

- 2 ea. 12V Ni-Cd Battery PA12 (193983-2)
- Universal Charger
- 2 ea. Battery Cover (414938-7)
- Tool Case (824635-1), Model 6270DWPE
- Tool Case (824581-8), Model 6270DWPLE
- Flashlight ML120, Model 6270DWPLE

6280DWPE & 6280DWPLE


- 2 ea. 14.4V Ni-Cd Battery PA14 (194172-2)
- Universal Charger
- 2 ea. Battery Cover (414938-7)
- Tool Case (824635-1), Model 6280DWPE
- Tool Case (824581-8), Model 6280DWPLE
- Flashlight ML140, Model 6280DWPLE

Specifications

	6260DWPE & 6260DWPLE	6270DWPE & 6270DWPLE	6280DWPE & 6280DWPLE
Capacities: Steel	3/8"	3/8"	3/8"
Wood	13/16"	1"	1"
No Load Speed: Low	0 - 350 RPM	0 - 350 RPM	0 - 350 RPM
High	0 - 1,200 RPM	0 - 1,200 RPM	0 - 1,200 RPM
Maximum Torque	200 in.lbs.	250 in.lbs.	260 in.lbs.
Battery	9.6VDC (1.3Ah)	12VDC (1.3Ah)	14.4VDC (1.3Ah)
Length	7-9/16"	7-9/16"	7-9/16"
Net Weight	3.1 lbs.	3.3 lbs.	3.5 lbs.
Shipping Weight	8.4 lbs.	8.8 lbs.	9.4 lbs.
(with Flashlight)	9.7 lbs.	10.3 lbs.	10.7 lbs.
Master Carton Qty.	5	5	5
(with Flashlight)	4	4	4
UPC Code	088381-05664-9	088381-05671-7	088381-05677-9
(with Flashlight)	088381-05667-0	088381-05674-8	088381-05680-9

Accessories

- 9.6V (2.6Ah) Ni-MH Battery 9134 (193156-7)
- 9.6V (3.0Ah) Ni-MH Battery 9135 (193137-1)
- 12V (2.6Ah) Ni-MH Battery 1234 (193157-5)
- 12V (3.0Ah) Ni-MH L.E.D. Light Battery 1235F (193623-2)
- 14.4V (2.6Ah) Ni-MH Battery 1434 (193158-3)
- 14.4V (3.0Ah) Ni-MH L.E.D. Light Battery 1435F (193782-2)
- 10 Minute Charger (DC1439)
- Universal Charger (DC1804)
- Automotive Charger (DC1822)

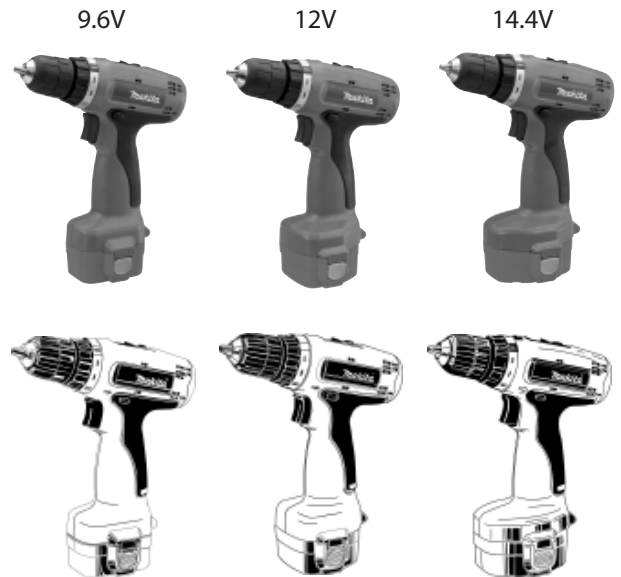

Model 6260DWPE



Model 6270DWPE



Model 6280DWPE



Model 6260DWPLE



Model 6270DWPLE



Model 6280DWPLE



Makita offers a wide variety of accessories for our Cordless Driver-Drills. For a complete listing, please refer to the Makita General Catalog, or visit our website at makitatools.com, or call 1-800-4MAKITA.

All specifications subject to change without prior notice. All models and accessories subject to stock on hand.
NTF-0305 5M MA-0196-05 For more information, call 1-800-4MAKITA or visit makitatools.com

Download from www.Somanuals.com. All Manuals Search And Download.



Makita U.S.A., 14930 Northam St., La Mirada, CA 90638

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>