

SOLDERING GUN WITH HOLDER




PLS 30

PARKSIDE

GB IE CY




SOLDERING GUN WITH HOLDER

Operation and Safety Notes



GB IE CY

Before reading, unfold the page containing the illustrations and familiarise yourself with all functions of the device.

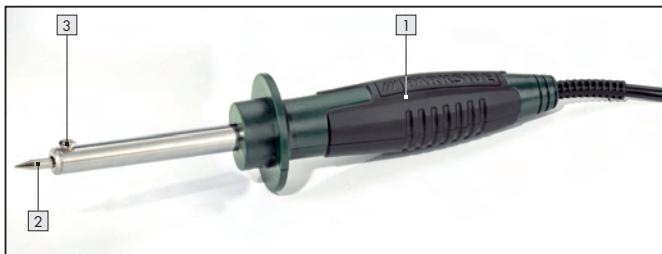

Introduction

Proper use	Page 7
Features and equipment.....	Page 8
Included items.....	Page 8
Technical information	Page 8

Safety advice

1. Workplace safety.....	Page 9
2. Electrical safety.....	Page 9
3. Personal safety	Page 10
4. Careful handling and use of electrical power tools.....	Page 12
Original accessories/ attachments.....	Page 13

Before first use

Fitting the helical spring	Page 13
Inserting/replacing soldering tips.....	Page 13

Operation

Switching on and off	Page 14
Third hand	Page 14
Solder sponge.....	Page 14
Soldering.....	Page 15

Maintenance and cleaning..... Page 15












Service centre Page 16

Warranty Page 16

Disposal..... Page 18

Declaration of conformity / Producer..... Page 19

The following pictograms are used in these operating instructions / on the device:

	Read instruction manual!
	Observe caution and safety notes!
	Caution - electric shock! Danger to life!
	Risk of explosion!
	Risk of fire!
	Warning - Hot surfaces!
V~	Volt (AC)
W	Watts (Effective power)
	Wear a breathing / dust mask, protective glasses, gloves and clothing.
	Keep children away from electrical power tools!
	For indoor use only!
	Check that the device, mains lead and plug are in good condition!
	Do not smoke!

	Do not eat!
	Do not drink!
	Dispose packaging and appliance in an environmentally-friendly way!

Soldering gun with holder

● Introduction



Please make sure you familiarise yourself fully with the way the device works before you use it for the first time and that you understand how to handle it correctly. Please read the operating instructions below. Be careful to keep these advice notes and if necessary pass them on to a third party.

● Proper use

The device is intended for use in soldering electronics and model-making. Use the device only as described and for the indicated purposes. The device is not intended for commercial use. Any other use or modification to the device shall be considered as improper use and could give rise to considerable dangers. The manufacturer will not accept liability for loss or damage arising from improper use.

● Features and equipment

- 1 Soldering pencil
- 2 Soldering tip
- 3 Clamp screw
- 4 Helical spring
- 5 Clips
- 6 Third hand
- 7 Multifunctional holder
- 8 Solder sponge

● Included items

- 1 Soldering pencil
- 1 Multifunctional holder
- 1 Tin solder, 10 grams
- 2 Soldering tips (1x installed)
- 1 Solder sponge
- 1 Operating instructions

● Technical information



Electricity supply: 230V ~
Frequency: 50Hz
Power consumption: 30W



Safety advice

- **CAUTION!** Failure to observe the instructions and advice given below may result in electric shock, fire and/or serious injury.

1. Workplace safety


- a) **Keep your working area clean and well lit.** Untidy or poorly lit working areas can lead to accidents.
- b)  **Do not work with the device in potentially explosive environments in which there are inflammable liquids, gases or dusts.** Electrical power tools create sparks, which can ignite dusts or fumes.
- c)  **Keep children and other people away while you are operating the electrical tool.** Distractions can cause you to lose control of the device.

2. Electrical safety



To avoid danger to life from electric shock:

- a) **The mains plug on the device must match the mains socket. The plug must not be modified in any way. Do not use an adapter plug with devices fitted with a protective earth.** Unmodified plugs and matching sockets reduce the risk of electric shock.


- b) **Keep the device away from rain or moisture.** Water entering an electrical device increases the risk of electric shock.
- c) **Use a residual current device (RCD) for protection if operating the electrical power tool in a moist environment is unavoidable.** The use of an RCD reduces the risk of electric shock.
- d)  **Do not use the mains lead for any purpose for which it was not intended, e.g. to carry the device, to hang up the device or to pull the mains plug out of the mains socket. Keep the mains lead away from heat, oil, sharp edges or moving parts of the device.** Damaged or tangled mains leads increase the risk of electric shock.
- e) Do not operate the device if the mains lead or mains plug is damaged.
⚠ WARNING! A damaged mains lead presents a serious danger to life from electric shock.
- f) Always keep the mains lead out of the operating area and run it away from the rear of the device.
- g) Always pull out the mains plug if you are about to leave the device unattended or wish to carry out any tasks on the device.


3. Personal safety

- a) **Children or persons who lack the knowledge or experience to use the device or whose physical, sensory or intellectual capacities are limited must never be allowed to use the device without supervision or instruction by a person responsible for their safety.**

Children must never be allowed to play with the device.

- b) **Remain alert at all times, watch what you are doing and always proceed with caution. Do not use the device if you are tired or under the influence of drugs, alcohol or medication.** One moment of carelessness when using the device can lead to serious injury.


-  **DANGER OF BURNS!** Never touch the hot soldering tip or the molten solder. You could suffer burn injuries. Always let the device cool before you replace components on the device, clean it or check its condition.
- After use let the soldering pencil cool down in air only. Under no circumstances quench the tip in water!

-  **CAUTION! DANGER OF FIRE!** Place the soldering pencil down only in the special multifunctional holder or on a fire-resistant pad.
- Place the soldering pencil in the multifunctional holder during pauses in your work.
- Keep the device away from combustible material.
- Never leave the device switched on and unattended.

- ▲ **CAUTION! DANGER OF INJURY!** Keep your hands away from the hot workpiece. The heat from soldering can be conducted through the workpiece. For this reason you should use the third hand to hold small workpieces.

- Avoid placing the hot soldering tip in contact with the plastic parts of the multifunctional holder. Failure to observe this advice may result in damage to the device.
- If a dangerous situation arises, pull the mains plug immediately out of the mains socket.

- ▲ **CAUTION! DANGER OF POISONING!** Do not breathe air contaminated with soldering fumes.

-  When working with the device for long periods do not allow the fumes from soldering to build up. They may be hazardous to health. Always provide adequate

ventilation of your working area. In addition, it is recommended that you wear protective gloves, a face mask and a protective apron.



Do not eat, drink or smoke in rooms where soldering is carried out. Otherwise your hands may transfer any adhering traces of lead via food or cigarettes into your body.

- Always wash your hands immediately after soldering .
- Do not dispose of soldering waste with the household rubbish. Soldering waste must be disposed of as special waste.

4. Careful handling and use of electrical power tools

- When not in use always ensure that electrical power tools are kept out of reach of children. Do not let anyone use the device if he or she is not familiar with it or has not read the instructions and advice.** Electrical power tools are dangerous when they are used by inexperienced people.
- Look after the device carefully. Check for broken parts or parts that are damaged to the extent they detrimentally affect the functioning of the device. Have any damaged parts repaired before you use the device.** Many accidents have their origins in poorly maintained electrical tools.

● Original accessories / attachments

- Use only the accessories detailed in the operating instructions. The use of attachments or accessories other than those recommended here could lead to you suffering an injury.

● Before first use

● Fitting the helical spring

- Insert the narrower end of the helical spring **4** into the opening of the multifunctional holder **7**. Ensure that the outwardly bent end of the helix points upwards and insert it into the recess provided for it in the multifunctional holder **7** (see arrow in Fig. C).
- Push the helical spring **4** into the opening as far as it will go.
- Turn the helical spring **4** clockwise to fix the multifunctional holder **7** in place.

● Inserting / replacing soldering tips



CAUTION! DANGER OF BURNS! Allow the soldering pencil to heat up without a soldering tip.

1. Insert a soldering tip **2** into the soldering pencil **1** to a depth of half of its shaft length.
 2. Tighten the clamp screw **3** using a Phillips screwdriver.
- Remove the soldering tip only when the device has been switched off and the soldering tip **2** has cooled.

● Operation

The mains voltage must correspond with that shown on the sander rating plate. Equipment labelled as 230V may also be used with 220V.

● Switching on and off

Switching on:

- Insert the mains plug into a suitable mains socket.

Switching off:

- Pull the plug out of the mains socket to switch off the device.

● Third hand



CAUTION! DANGER OF BURNS! The clips **5** on the third hand **6** can become hot while you are soldering the workpiece.

1. Fold out the third hand **6** upwards.
2. Rotate the clips **5** until they are oriented in the required direction.
3. Clamp the workpiece between the two clips **5**.

● Solder sponge

⚠ CAUTION! The hot soldering tip **2** must never be placed in contact with a dry solder sponge **8**, otherwise the solder sponge may be damaged.

- The solder sponge **8** is used to clean soldering tips.
- Moisten the solder sponge **8** before you use it.

● Soldering

- The soldering pencil has a rated output of 30 watts and is therefore ideal for electronics soldering.
- The design of the soldering pencil makes it especially suitable for use where access is difficult or for fine soldering work.
- To achieve the best results use electronics solder 1.0 (10 g electronics solder with integrated flux is included) or 1.5 mm diameter 60% Sn. We recommend the use of soldering paste (not soldering grease or soldering fluid) as a flux.
 - Clean the soldering tip 2 on the moist solder sponge 8.
 - After cleaning the tip 2 it must be “tinned” (coated with solder). This is done by melting solder on to the hot soldering tip 2.
 - Guide the soldering tip 2 to the intended joint site and heat the joint.
 - Place the solder (with flux) between the joint site and the tip 2 to melt it.
 - Continue to feed further solder until the whole joint has a covering of solder.
 - Then quickly remove the soldering tip in order to avoid overheating the molten solder.
 - Allow the solder to harden while not subjecting it to vibration or movement.
 - **Note:** The flux is either already contained in the solder or applied separately. Ask the advice of the retailer when buying solder in order to choose the most suitable solder for your intended purpose.

● Maintenance and cleaning

⚠ WARNING! RISK OF INJURY! Before you carry out any work on the device always pull the mains plug out of the mains socket and allow the device to cool.

- Clean the device after you have finished using it.
- Use a cloth and a little mild detergent for cleaning the device.
- In no circumstances use sharp objects, or petrol, solvents or cleaning agents that might attack plastic.
- Do not allow any liquids to enter the inside of the device.

● Service centre

- **⚠ WARNING!** **Have your device repaired only by qualified specialist personnel using original manufacturer parts only.** This will ensure that your device remains safe to use.
- **⚠ WARNING!** **If the plug or mains lead needs to be replaced, always have the replacement carried out by the manufacturer or his service centre.** This will ensure that your device remains safe to use.

● Warranty

This appliance is guaranteed for 3 years from the date of purchase. It has been carefully produced and meticulously checked before delivery. Please keep your receipt as proof of purchase. Contact your service centre by telephone in case of questions pertaining to the warranty. Your goods can be transmitted free of cost only in this manner. This warranty applies only to the initial purchaser and is non-transferable.

The warranty covers only material or manufacturing faults, not normal wear or damage to fragile parts such as switches or rechargeable batteries. The appliance is intended solely for private, not commercial, use.

If this product has been subjected to improper or inappropriate handling, abuse, or interventions not carried out by one of our authorised sales and service outlets, the warranty will be considered void. This warranty does not affect your statutory rights.

GB

DES Ltd

Units 14-15

Bilston Industrial Estate

Oxford Street

Bilston (Great Britain)

WV14 7EG

Tel.: 0870 / 787-6177

Fax: 0870 / 787-6168

e-mail: support.uk@kompernass.com

IE

Kompernaß Service Ireland

Tel.: 1850 930 412 (0,082 €/Min.)

*** Standard call rates apply. Mobile operators
may vary.**

e-mail: support.ie@kompernass.com

● Disposal



The packaging and ancillary packing consist wholly of environmentally friendly materials. They can be disposed of at your local recycling facility.



Do not dispose of electrical devices with the household rubbish!

In accordance with European Directive 2002/96/EC (covering waste electrical and electronic equipment) and its transposition into national legislation, worn out electrical devices must be collected separately and taken for environmentally compatible recycling.

Contact your local refuse disposal authority for more details of how to dispose of your worn-out devices.

● Declaration of conformity / Producer CE

We, Kompersnaß GmbH, Burgstr. 21,
D-44867 Bochum, Germany, hereby declare that this product
complies with the following EU directives:

EU Low Voltage Directive (2006 / 95 / EC)

Electromagnetic Compatibility (2004 / 108 / EC)

Device type / description:

Soldering gun with holder

Bochum, 30.06.2009



Hans Kompersnaß
- Managing Director -

We reserve the right to make technical modifications in the course of
further development.

IAN: 33381

KOMPERNASS GMBH

Burgstraße 21

D-44867 Bochum

© by **ORFGEN Marketing**

Last Information Update: 06/2009 · Ident.-No.: PLS30062009-6



Download from [Www.Somanuals.com](http://www.Somanuals.com). All Manuals Search And Download.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>