

Charger Station Series

Easy and convenience to use on desktop

Charger Station / Silicone Power Battery / Power Bank / Master/Slave / Dual Green Power



* Charger Station


Charger Station

Features

- * Surge protection-1080 Joules
- * 4 AC outlets with 2 ports USB charger
- * 15A, 125VAC, 60Hz, 1875 Watts
- * 2-in-1 rocker switch w/15A overload resettable circuit breaker
- * LED indicator for surge protected and grounded
- * Foldable design for easy pack & stow conveniently
- * Surge circuit shut down and auto power shut down
- * 6 FT SJT 14AWG x 3C heavy duty power cord with
- * 180 deg USA plug CC-002

Specifications

Model Name	Charger Station
Electrical Rating	15A, 125VAC, 60Hz, 1875 Watts
Surge Lines Protected	3-Line (L-N, L-G, N-G)
UL Clamping Voltage	UL 1449 330V
Surge Energy Joule Rating	1080 Joules
Maximum Spike Current	72000 Amps (3 line total)
Response Time	< 1 nanosecond
Max. Spike Voltage	6KV
USB Ports	USB Ver. 2.0 Bus-Powered Mode Build-In 2 ports Downstream USB Ports

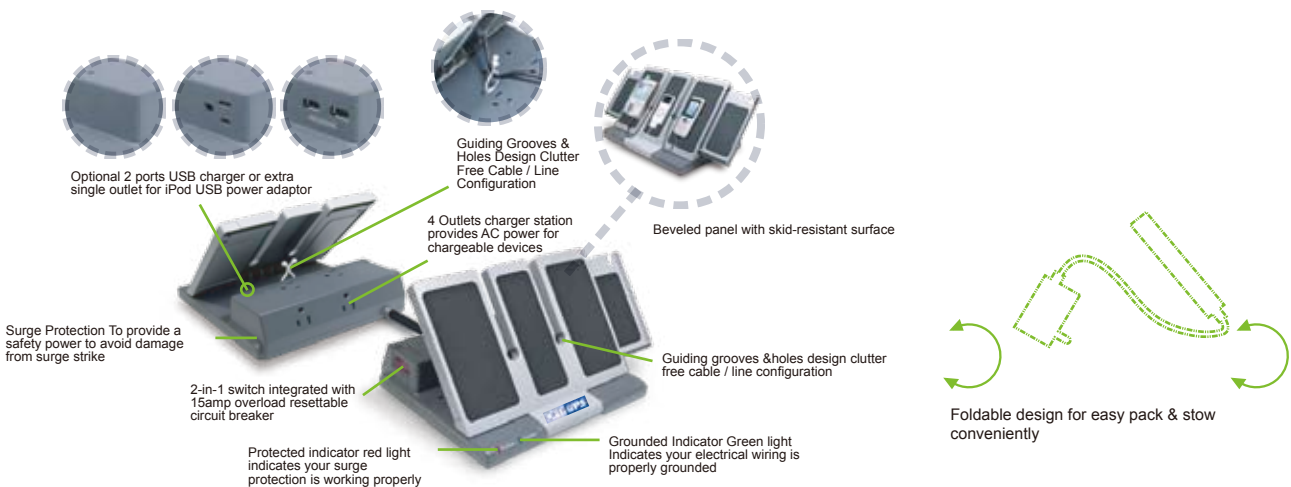

Standby UPS Series

Line Interactive UPS Series

On Line UPS Series

AVR Series

Inverter Series

Surge Series

Green Power Series

Networking Series

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>