

# Quick Reference Guide

## Parts Descriptions

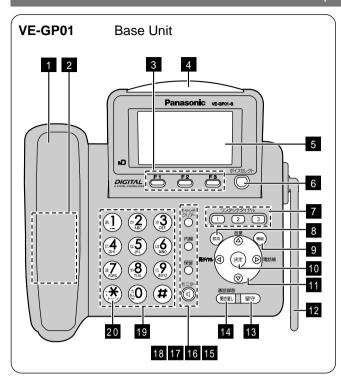

- 1 Handset
- 2 Speaker
- 3 Multi-operation buttons
- 4 Call indicator
- 5 Liquid crystal display
- 6 Voice select button
- 7 One-touch Dial buttons
- 8 Cancel button
- 9 Function button
- 10 Set button
- 11 Redial button (再ダイヤル (回)) Phone book button ( ◯ 電影機 ) Volume control buttons ( ( ) ( )
- 12 Antenna
- 13 Auto Answer button & indicator
- 14 Playback/Call Record button
- 15 Flash/Clear button
- 16 Intercom button
- 17 Hold button
- 18 Monitor button
- 19 Numeral/Character buttons
- 20 Tone button (to switch to DTMF tone)

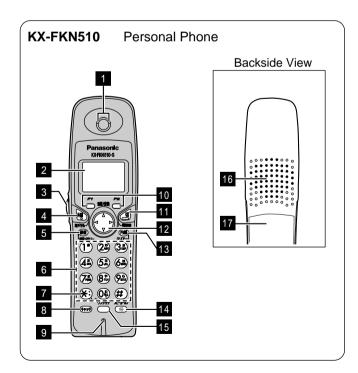

- 1 Earpiece
- 2 Liquid crystal display
- 3 Voice select button
- 4 Send/Answer button & indicator
- 5 Hold/Caller ID button
- 6 Numeral/Character buttons
- 7 Tone button (to switch to DTMF tone)
- 8 Flash button
- 9 Microphone
- 10 Multi-operation buttons
- 11 Off button
- Phone book button (

Volume control button ( )



- 13 Intercom/Clear button
- 14 Speakerphone button & indicator
- 15 One-touch Dial button
- 16 Speaker
- 17 Battery cover

本機は日本国内用です。国外での使用に対するサービスは致しかねます。

This product is designed for use in Japan.

Panasonic cannot provide service for this product if used outside Japan.

## **Basic Operations**

## Base unit (VE-GP01)

#### To make a call

Lift the handset. → Dial.

### To receive a call

When the phone rings... → Lift the handset.

## To place the current call on hold

Press (17) during a call.

(You can place the handset on the base unit.)

### To retrieve the held call

If you have returned the handset on the base unit, lift the handset.

If you have not returned the handset on the base unit, press  $\stackrel{\text{Re}}{\bigcirc}$  again.

## To transfer the held call to the personal phone

Press (16) during a call. → Press (1) - (4).

(Intercom No.). → Place the handset on the base unit when the other party answers.

## To use TAM (Telephone Answering Machine)

When you leave home, press (13) to turn on the indicator.

(To deactivate, press again to turn off the indicator.)

→ When receiving a call while TAM is activated, it answers the call automatically in Japanese, and records the incoming messages.

Then, the indicator starts flashing.

→ When you return home, press to play back the messages.

The ndicator turns off and the answering mode is deactivated.

After playing back the messages, press (\*\*) to erase the messages or press (\*\*) to keep the messages. To play back the message while TAM is deactivated, press (\*\*\*).

\*Up to 50 messages can be recorded for approx. 18 minutes in total.

# To hear recorded messages while away from home (Remote control)

#### Preparation before you leave home

Store a remote control number.

With the handset placed on the base unit, press (##) (0) (6)

→ Enter the desired 4-digit number. → Press ﷺ. When you leave home, press 🕶 to turn on the indicator.

## To hear messages

Dial your home phone number. → While the outgoing message is played back...

- → Enter your remote control number.
- → Announcement → Press ②. → You will hear recorded messages if any.

#### **NOTE**

This operation can be made only from telephones which can send DTMF signals.

### Personal phone (KX-FKN510)

#### To make a call

Lift the personal phone from the charger and press

(4). → Dial......To end the call, place the personal phone on the charger or press (11).

#### To receive a call

When the phone rings... → Lift the personal phone from the charger or press ♠ . → Talk......To end the call, place the personal phone on the charger or press ✔ .

# To make a call using the speakerphone (Hands-free talk)

Press (14). → Dial. → Talk to the microphone.....To end the call, place the personal phone on the charger or press (1).

# To receive a call with the speakerphone (Hands-free talk)

When the phone rings... → With the personal phone placed on the charger, press or → Talk to the microphone.....To end the call, press of.

### To place the current call on hold

Press ( 5 ) during a call.

### To retrieve the held call

Press 🛍 or 🕮.

### To transfer the held call to the base unit

Press 13 ) during a call.  $\Rightarrow$  Press 0. Place the personal phone on the charger, or press 1 when the other party answers.

# To transfer the held call to another personal phone

Press during a call. → Press \bullet - \bullet \end{align\*}

(Intercom No.). → Place the personal phone on the charger, or press \bullet \bullet \text{ when the other party answers.}

The number after the button shows the location of the button described in the previous page.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com