

SHB1300/61-User Manual (English-Korea)

Back Cover (封底)

Cover (封面)



Bluetooth headset

SHB1300/61

EN	User manual	2
KR	사용 설명서	10

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips Electronics N.V.
or their respective owners.
2006 © Koninklijke Philips Electronics N.V. All rights reserved.

www.philips.com




PHILIPS

Size: 100x135mm

Contents


- 4 Getting started**
 - 4 Charging your headset
 - 4 Pair your headset to your mobile phone
 - 5 Turn your headset on
 - 5 Turn your headset off
 - 5 Connecting your Bluetooth headset
- 6 Using your headset**
 - 6 Answering incoming calls
 - 6 Transferring calls
 - 6 Muting the microphone
 - 6 Ending calls
 - 6 Voice dialing
 - 7 Redial last dialed number
 - 7 Reject incoming calls
 - 7 Adjusting speaker volume
- 7 Wearing your Bluetooth headset**
 - Wearing options
- 8 Troubleshooting**
- 8 Specifications**
- 9 Certifications, approvals, statements**

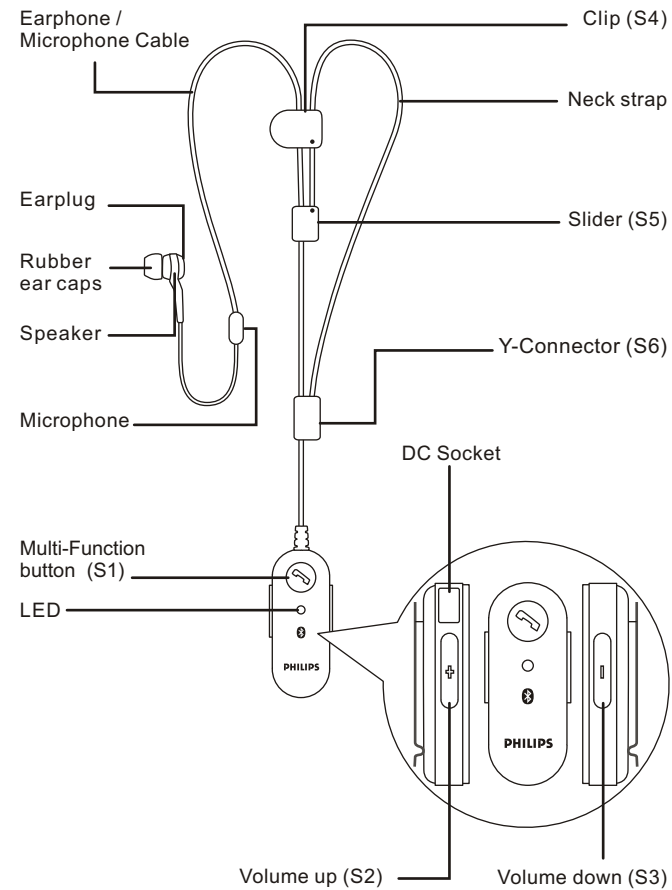

Bluetooth mono headset SHB1300/61

Congratulations! You have just bought a state-of-the-art Philips Bluetooth headset. With the Philips SHB1300/61 you can enjoy convenient hands-free communication with your Bluetooth enabled phone. This instruction manual will help you to get started quickly and achieve the best performance from your headset.

Getting started

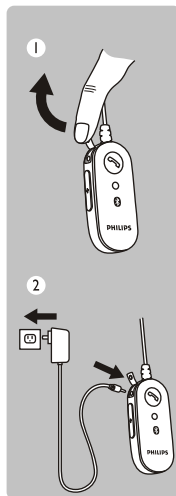

Charging your headset

Before you use your headset for the first time charge the battery for 6 hours for optimum battery capacity and lifetime.

Use only the original charger (5V) for charging the headset. Using another charger may damage or destroy your headset!

Plug the AC adapter into the power outlet and connect the charger cable to the headset's DC socket. During recharging the LED indicator will show a steady red light. Charging is completed once the LED will switch off. Typically a full charge will take 3 hours.

The headset LED will flash red instead of green when the battery is low and you will hear a short beep every few minutes. Finish your call before re-charging as connecting the charger to the headset will put your headset in charging mode and could cut an ongoing call. Once the battery has run out of power you cannot power the headset on unless the charger is connected.

Pair your headset to your mobile phone

Your Bluetooth headset must be paired to your mobile phone before using it for the first time with your phone. "Pairing" will establish a unique encrypted link between your mobile phone and your headset.

1. Make sure the headset (HS) is turned off, charged and disconnected from the charging cable before you start pairing.

2. To activate pairing mode press and hold the multi function button S1 until the LED starts flashing red and green alternately. The HS will remain in pairing mode for 4 minutes, to resume pairing after 4 minutes repeat the steps above.
3. Follow the operating instructions for your mobile phone to start the pairing process. Typically this involves accessing a menu called "Setup", "Bluetooth" or "Connectivity" and selecting the option to discover or search for Bluetooth devices. After several seconds search time your phone should indicate that it has found the "Philips SHB1300/61"
4. Upon selecting the headset on your mobile phone typically you will need to confirm the pairing and enter a passkey or PIN. Please enter the headset's PIN "0000" (4 zeros).

The headset LED will flash green every 3 seconds, indicating successful pairing. If your phone asks whether you want to change the headset's name, you may confirm the "Philips SHB1300/61" name or change it. You are now ready to talk!

If pairing does not occur as expected turn the headset and phone off and wait for 10 seconds. Turn the headset and phone on again and repeat Steps 1-4.

Turn your headset on

While the headset (HS) is turned off, press and hold the multi function button until a green LED signal for 1 second and a low tone followed by a high tone will indicate that the HS is powered up. Once the HS is powered up a green LED will flash every 3 seconds.

Turn your headset off

While the HS is powered up, press and hold the multi function button S1 for 3 seconds. A high tone followed by a low tone will indicate that the HS is powered down. The LED indicator will remain red until S1 is released.

Connecting your Bluetooth headset

Pairing needs to be done only once for the initial setup. After the initial pairing follow these simple steps to connect your Bluetooth headset to your mobile phone:

- Make sure Bluetooth is enabled on your mobile phone.
- Turn on the headset

After a few seconds the connection between your headset and mobile phone will be established. If prompted by your mobile phone whether to accept the connection with the headset please confirm in order to establish the Bluetooth link. You are now ready to talk!

Using your headset

Answering incoming calls

The HS will ring when a call comes in. Press the multi function button S1 to answer the call. The green LED will flash fast (once a second) while the call is in progress.

Transferring calls (Available if supported by your mobile phone)

During your call, calls can be transferred from the Bluetooth phone to the HS and from the HS to the Bluetooth phone.

To transfer a call from HS to the Bluetooth phone, please follow the operating instructions of your phone.

To transfer a call from the Bluetooth phone to the HS: press S1 once; the call will be transferred to the HS.

Muting the microphone

To mute the microphone during an active call:

- Press the volume control buttons S2 and S3 simultaneously for about a second. A periodic beep tone will be heard while the mute function is active.

To end the mute function:

- Press the volume control buttons S2 and S3 simultaneously. The periodic beep tone will stop.

Ending calls

Press S1 to end an ongoing call. After the call is disconnected, the green LED will flash once every three seconds.

Voice dialing (Available if supported by your mobile phone)

1. Make sure the voice dialing function is properly set up in your mobile phone.
2. Press the multi function button S1 on the HS shortly.
3. After hearing the voice dial signal (four tones - low to high pitch), say the name of the person as recorded in your mobile phone. The call will be connected within a few seconds.

Redialing the last dialed number (Available if supported by your mobile phone)
To redial the last dialed number, press and hold the volume down key S3 for 2 seconds. A short low tone will indicate an attempt to redial.

Rejecting incoming calls (Available if supported by your mobile phone)

To reject an incoming call, press the multi function button S1 and hold it until you hear a long beep tone, then release it.


Adjusting speaker volume

During a call:

- Press and release S2 to increase the speaker volume and
- Press and release S3 to decrease the speaker volume.

A key tone will indicate any increase or decrease of the volume. A higher pitch signal tone will alert you when the volume level reaches its maximum or minimum.

Wearing your Bluetooth headset

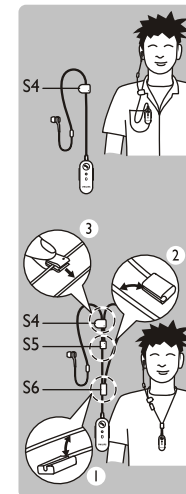


Wearing options

The Bluetooth headset can be attached to your garment with the metal clip or be worn around the neck.

To change from clip on style to necklace style, attach the neck strap in three steps:

1. Attach the Y - connector (S6) to the earplug cable close to Bluetooth device.
2. Attach the slider (S5) to the earplug cable beneath the clip (S4).
3. Fix the slider position by attaching the clip (S4) to the earplug cable.

You can detach the neck strap from the earplug cable at any time.



To adjust the neckband in size:

- Open the clip (S4)
- Move the slider(S5)up or downward on the earplug cable
- Fix your preferred length with the clip (S4)

For optimal wearing comfort choose one of the three included rubber ear caps that best fits your ear and place it on the earplug.

Trademarks

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Koninklijke Philips Electronics N.V. is under license. Other trademarks and trade names are those of their respective owners.

Troubleshooting

Problem	Possible cause	Solution
Bluetooth headset does not switch on.	Battery is very low.	Charge the battery.
No connection to mobile phone.	Bluetooth disabled.	Enable Bluetooth on your mobile phone and turn the HS on.
Mobile phone cannot find headset	Headset may not be in pairing mode. (HS stays in pairing mode for 4 min.)	Put HS in pairing mode as described above.
	Pairings may have been reset.	Start the pairing process as describe above.
Redialing does not work.	Your mobile phone may not support this feature.	
Voice dialing does not work.	Your mobile phone may not support this feature.	

*Please visit www.philips.com/support for additional support.

Specifications

Rechargeable Lithium-Ion battery
 Bluetooth 1.2 compliant, HSP, HFP
 Range: Up to 33 feet / 10 meters
 Typical standby time: 200 hours
 Typical talk time: 7 hours
 Typical charging time: 3 hours

Design and specifications are subject to change without notice. Talk time and stand-by time may vary.

목차

- 12 일반 사용 방법
- 12 헤드셋 충전
- 12 휴대폰에 헤드셋 연결
- 13 헤드셋 전원 켜기
- 13 헤드셋 전원 끄기
- 13 **Bluetooth** 헤드셋 연결


- 14 헤드셋 사용 방법
- 14 전화 받기
- 14 통화 전환
- 14 마이크 끄기
- 14 통화 종료
- 14 음성으로 전화 걸기
- 15 마지막 발신 번호로 다시 걸기
- 15 수신 거부
- 15 스피커 음량 조절

- 15 헤드셋 착용 방법
- 옵션 착용

- 16 문제 해결 및 지원

- 16 사양

- 17 각종 인증, 승인, 선언

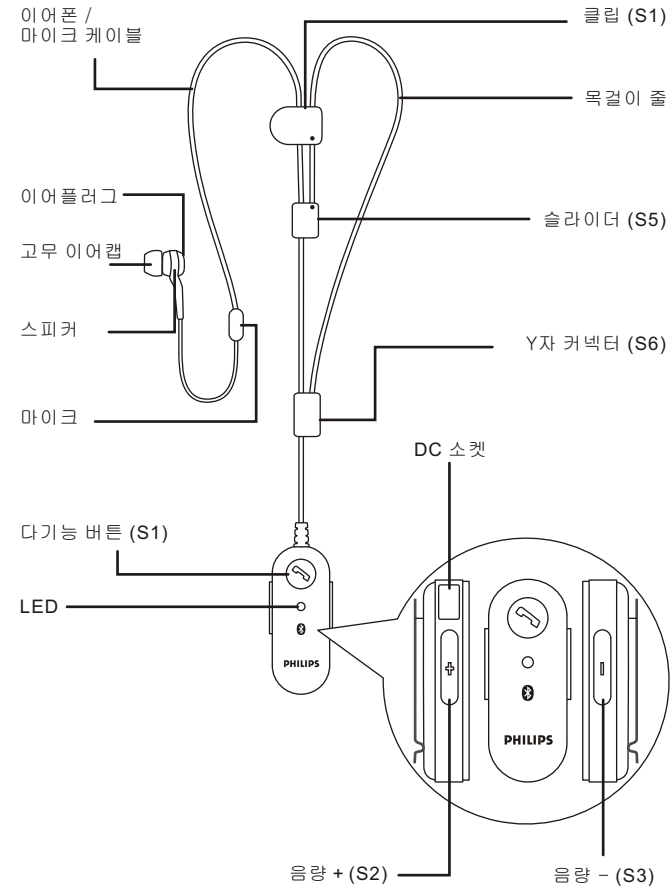


모노 Bluetooth 헤드셋

SHB1300/61

축하드립니다! 최첨단 Philips Bluetooth 헤드셋을 구입하셨습니다. Philips SHB1300을 사용하면 Bluetooth 기능이 있는 전화기와 함께 편리한 핸즈프리 통신을 즐기실 수 있습니다. 본 설명서는 사용자가 헤드셋 사용 방법을 빨리 익히고 헤드셋이 최고 성능을 발휘하게 하는 데 도움을 줄 것입니다.

일반 사용 방법

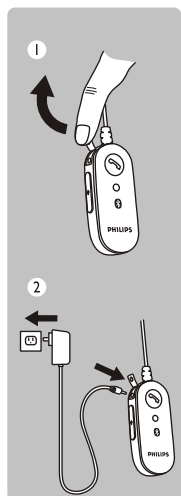

헤드셋 충전

최적의 배터리 용량과 수명을 위해 헤드셋을 처음 사용하기 전에 6시간 동안 배터리를 충전하십시오.

헤드셋 충전 시 제공된 충전기(5V)만 사용하십시오. 다른 충전기를 사용하면 헤드셋이 손상되거나 망가질 수 있습니다!

AC어댑터 플러그를 전원 콘센트에 연결하고 충전기 케이블을 헤드셋 DC 소켓에 연결합니다. 충전하는 동안 LED표시등에 적색이 켜져 있습니다.충전이 완료되면 LED가 꺼집니다. 일반적으로 완전히 충전하는 데 3시간 정도 걸립니다.

배터리 전원이 약하면 헤드셋 LED에 녹색 대신 적색이 깜박이고 몇 분마다 짧은 경고음이 들립니다. 헤드셋에 충전기를 연결해두면 헤드셋이 충전 모드 상태가 되어 통화가 중단될 수 있으므로 충전하기 전에 통화를 끝내십시오. 배터리 전원이 완전히 소모되면 충전기가 연결되어 있지 않는 한 헤드셋 전원을 켤 수 없습니다.

휴대폰에 헤드셋 등록하기

처음으로 사용하기 전에 Bluetooth 헤드셋을 반드시 휴대폰에 등록해야 합니다.“등록”하면 휴대폰과 헤드셋 간에 암호화된 고유 링크가 생깁니다.

- 1.등록을 시작하기 전에 HS의 전원이 꺼져 있고 충전이 완료되어 있으며 충전용 케이블에서 분리되어 있는지 확인합니다.
- 2.등록 모드를 활성화하려면 LED에 적색과 녹색이 교대로 깜박이기 시작할 때까지 대기 버튼 S1을 4초간 누릅니다. HS는 4분간 등록 모드를 유지하고 4분 후에 다시 등록하려면 위 단계를 반복합니다.
- 3.휴대폰의 사용 설명서 지침에 따라 등록 절차를 시작합니다. 일반적으로 “설정”, “Bluetooth” 또는 “연결”이라는 메뉴에 액세스하고 Bluetooth 장치를 탐색 또는 검색하는 옵션을 선택하는 것이 등록 절차입니다. 몇 초간 검색한 후에 “Philips SHB1300”을 찾았다는 표시가 휴대폰에 나타납니다.
- 4.휴대폰에 맞는 헤드셋을 선택하고 나면 일반적으로 등록을 확인하고 등록 키 또는 PIN을 입력해야 합니다.헤드셋 PIN“0000”(영4개)을 입력합니다.

헤드셋 LED에서 3 초마다 녹색이 깜박이며 이는 등록이 완료되었음을 나타냅니다. 휴대폰에서 헤드셋 이름을 변경하라는 메시지가 나타나면 “Philips SHB1000”라는 이름을 확인하거나 다른 이름으로 변경할 수 있습니다.이제 통화할 준비가 완료되었습니다!

등록이 잘 되지 않는 경우에는 헤드셋과 휴대폰의 전원을 끄고 10초간 기다립니다. 헤드셋과 휴대폰의 전원을 다시 켜고 1~4 단계를 반복합니다.

헤드셋 전원 켜기

헤드셋(HS)의 전원이 꺼져 있는 상태에서 녹색 LED가 1초간 켜지고 저음이 들린 후에 고음이 들릴 때까지 대기 버튼을 누르면 HS의 전원이 켜집니다. HS의 전원이 켜지면 녹색 LED가 3초마다 깜박입니다.

헤드셋 전원 끄기

HS의 전원이 켜진 상태에서 S1을 3초간 누릅니다. 고음이 들린 후에 저음이 들리면 HS의 전원이 꺼졌음을 의미합니다. S1에서 손을 뗄 때까지 LED 표시등에는 적색이 켜져 있습니다.

Bluetooth 헤드셋 연결

등록은 초기 설정 시 한번만 해야 합니다. 초기 설정 시 등록된 후에는 아래 단계에 따라 Bluetooth 헤드셋을 휴대폰에 연결합니다:

- 휴대폰에서 Bluetooth 기능을 사용할 수 있는지 확인합니다.
- 헤드셋의 전원을 켭니다.

몇 초 후에 헤드셋과 휴대폰이 연결됩니다. 휴대폰에서 헤드셋과의 연결에 동의하는지 여부를 묻는 메시지가 나타나면 Bluetooth 링크를 연결하기 위해 메시지에 동의합니다. 이제 통화할 준비가 완료되었습니다!

헤드셋 사용 방법

전화 받기

전화가 오면 HS에서 수신음이 납니다. 다기능 버튼 S1을 눌러 전화를 받습니다. 전화를 받고 있는 중에는 녹색 LED가 빠르게(1초에 한 번씩) 깜박입니다.

통화 전환(휴대폰에서 해당 기능을 지원하는 경우에 한함)
제품을 사용하는 동안 Bluetooth 휴대폰에서 HS로, HS에서 Bluetooth 휴대폰으로 통화를 전환할 수 있습니다.

HS에서 Bluetooth 휴대폰으로 통화를 전환하려면 휴대폰의 사용 설명서 지침을 따릅니다.

Bluetooth 휴대폰에서 HS로 통화를 전환하려면: S1을 한 번 누릅니다. HS로 통화가 전환됩니다.

마이크 끄기

통화 중에 마이크를 끄려면:

- 음량 조절 버튼 S2와 S3을 약 1초간 동시에 누릅니다. 무음 기능이 활성화되어 있는 동안에는 일정한 간격으로 삐 소리가 납니다.

무음 기능을 끝내려면:

- 음량 조절 버튼 S2와 S3을 동시에 누릅니다. 일정한 간격의 삐 소리가 멈춥니다.

통화 종료

통화를 종료하려면 S1을 누릅니다. 전화 연결이 끊긴 후에 녹색 LED가 3초마다 깜박입니다.

음성으로 전화 걸기

1. 음성 다이얼 기능이 휴대폰에 설정되어 있는지 확인합니다.
2. HS의 다기능 버튼 S1을 한 번 누릅니다.
3. 음성 다이얼 신호(4가지 음 낮은 음에서 높은 음까지)가 들린 후에 휴대폰에 녹음된 사람의 이름을 말합니다. 몇 초 내에 통화가 연결됩니다.

마지막 발신 번호로 다시 걸기(휴대폰에서 해당 기능을 지원하는 경우에 한함)
마지막 발신 번호로 다시 걸려면 음량 조절 키 S2를 2초간 누릅니다. 짧고 낮은 음은 재다이얼을 시도하고 있음을 의미합니다.

수신 거부(휴대폰에서 해당 기능을 지원하는 경우에 한함)
수신 거부하려면 긴 삐 소리가 들릴 때까지 다기능 버튼 S1을 눌렀다가 손을 뗍니다.


스피커 음량 조절

통화 중에:

- S2를 반복해서 눌러 스피커 음량을 높이고.
- S3를 반복해서 눌러 스피커 음량을 낮춥니다.

짧은 삐 소리는 음량이 증가 또는 감소하고 있음을 의미합니다. 높은 신호 음은 음량이 최고 또는 최저에 도달했음을 알려 주는 것입니다.

Bluetooth 장치 착용

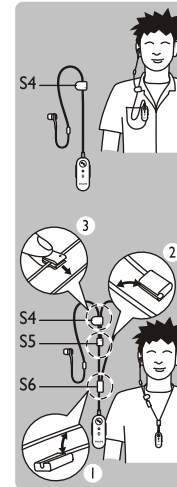


옵션 착용

Bluetooth 헤드셋을 금속 클립을 사용하여 옷에 부착하거나 목걸이로 착용할 수 있습니다.

클립 스타일에서 목걸이 스타일로 변경하려면 아래 세 단계에 따라 목걸이 줄을 부착합니다.

1. Y자 커넥터(S6)를 장치에 가까운 이어플러그 케이블에 부착합니다.
2. 슬라이더(S5)를 클립(S4) 아래의 이어플러그 케이블에 부착합니다.
3. 클립(S4)을 이어플러그 케이블에 부착하여 슬라이더 위치를 고정합니다.

언제든지 이어플러그 케이블에서 목걸이 줄을 분리할 수 있습니다.



목걸이 줄의 길이를 조절하려면:

- 클립(S4)을 엽니다.
- 슬라이더(S5)를 이어플러그 케이블의 위나 아래로 이동합니다.
- 클립(S4)으로 원하는 길이만큼 고정합니다.

가장 편안한 착용감을 위해 제공된 고무 이어캡 3개 중 사용자의 귀에 적합한 것을 선택하여 이어플러그에 끼우십시오.

문제 해결 및 지원

문제	발생 가능 원인	해결 방법
Bluetooth 헤드셋의 전원이 켜지지 않습니다.	배터리 전원이 매우 약합니다.	Bluetooth 헤드셋을 충전하십시오.
휴대폰에 연결할 수 없습니다.	Bluetooth 기능이 꺼져 있습니다.	휴대폰의 Bluetooth 기능을 활성화시킨 다음 HS의 전원을 켜십시오.
휴대폰에서 헤드셋을 찾을 수 없습니다.	헤드셋이 등록 모드 상태가 아닐 수 있습니다. (HS는 4분간 등록 모드를 유지합니다.)	위의 설명대로 HS를 등록 모드로 전환하십시오.
	등록이 재설정되었을 수 있습니다.	위의 설명대로 등록 절차를 시작하십시오.
재다이얼 기능이 작동하지 않습니다.	휴대폰이 이 기능을 지원하지 않을 수 있습니다.	
음성 다이얼 기능이 작동하지 않습니다.	휴대폰이 이 기능을 지원하지 않을 수 있습니다.	

*자세한 지원은 www.philips.com을 방문하시기 바랍니다.

사양

충전용 리튬 이온 배터리
 Bluetooth 1.2 호환, HSP, HFP
 범위: 최대 33피트/10미터
 통상 통화 대기 시간: 200시간
 통상 통화 시간: 최대 7시간
 통상 통화 대기 시간: 3시간

사전 고지 없이 디자인과 사양이 변경될 수 있습니다. 통화 시간 및 통화 대기 시간은 다를 수 있습니다.

상표

Bluetooth 표시와 로고는 Bluetooth SIG, Inc.의 소유이며 Koninklijke Philips Electronics N.V의 Bluetooth 표시 및 로고 사용은 라이선스에 따른 것입니다. 기타 상표 및 상표명은 해당 소유자의 소유입니다.



CF1 - SHB1300/61

인증받은자의 상호:(주)필스전자
 기기의명칭(모델명):무선데이터시스템용무선기기(SHB1300/61)
 제조자:Koninklijke Philips Electronics N.V.
 제조국:중국

제조년월:

당해 무선설비가 전파혼신 가능성이 있으므로 인명안전과 관련된 서비스는 할 수 없음.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>