
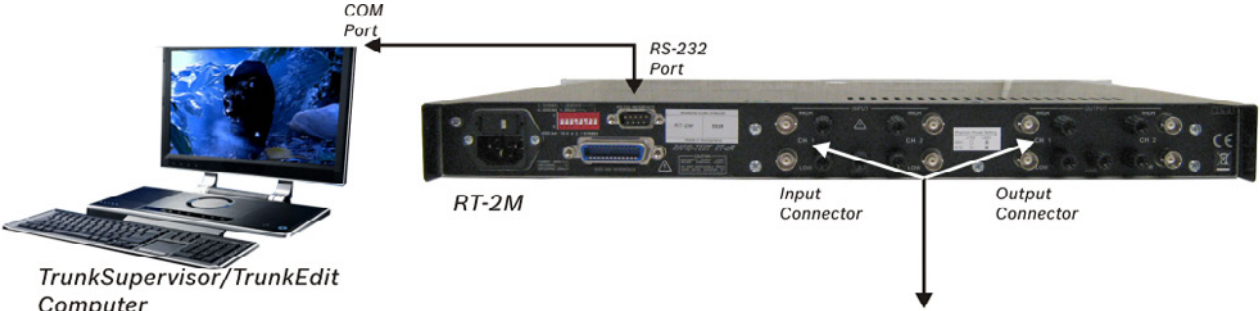


## RT-2M (90007891000) Quick Start Guide



**INCLUDED PARTS:**

- RT-2M Unit
- DB-9 Cable



COM Port

RS-232 Port

RT-2M

Input Connector

Output Connector

To the appropriate Frame connector

- ADAM
- ADAM CS
- Zeus
- ZeusII
- Cronus

TrunkSupervisor/TrunkEdit Computer

**NOTE:** See the entire system diagram on reverse side.

### RS-232 Cable Pinout

RT-2M DB-9 FEMALE	TRUNK SUPERVISOR DB-9 FEMALE
2	3
3	2
5	5
7	8
8	7

**Step 1.** Cable the Trunk Supervisor/TrunkEdit PC to the RT-2M.

**NOTE:** In Trunk Supervisor, you must designate the intercom and port number the RT-2M sends the test signal over.

To cable the Trunk Supervisor/TrunkEdit PC to the RT-2M, do the following:

- Using the included cable, connect a **COM port** on the Trunk Supervisor computer to the **RS-232 Interface connector** on the rear panel of the RT-2M.

**Step 2.** Cable the RT-2M to the Frame.

To cable the RT-2M to the Frame, do the following:


- Using the appropriate connector defined below, connect the **RT-2M** to the Frame:

CONNECTOR	CONNECTION
RJ-12	• Plug <b>pins 2 and 5</b> into the Ch 1 input connector terminals.
	• Plug <b>pins 3 and 4</b> into the Ch 1 output connector terminals.
DB-9	• Plug <b>pins 7 and 8</b> into the Ch 1 input connector terminals
	• Plug <b>pins 4 and 5</b> into the Ch 1 output connector terminals.

- Connect the **other end of the connector** to the trunking connection port as defined in the Trunk Supervisor software.

# RTS® Digital Matrix Intercom

Innovating the Future of Communications

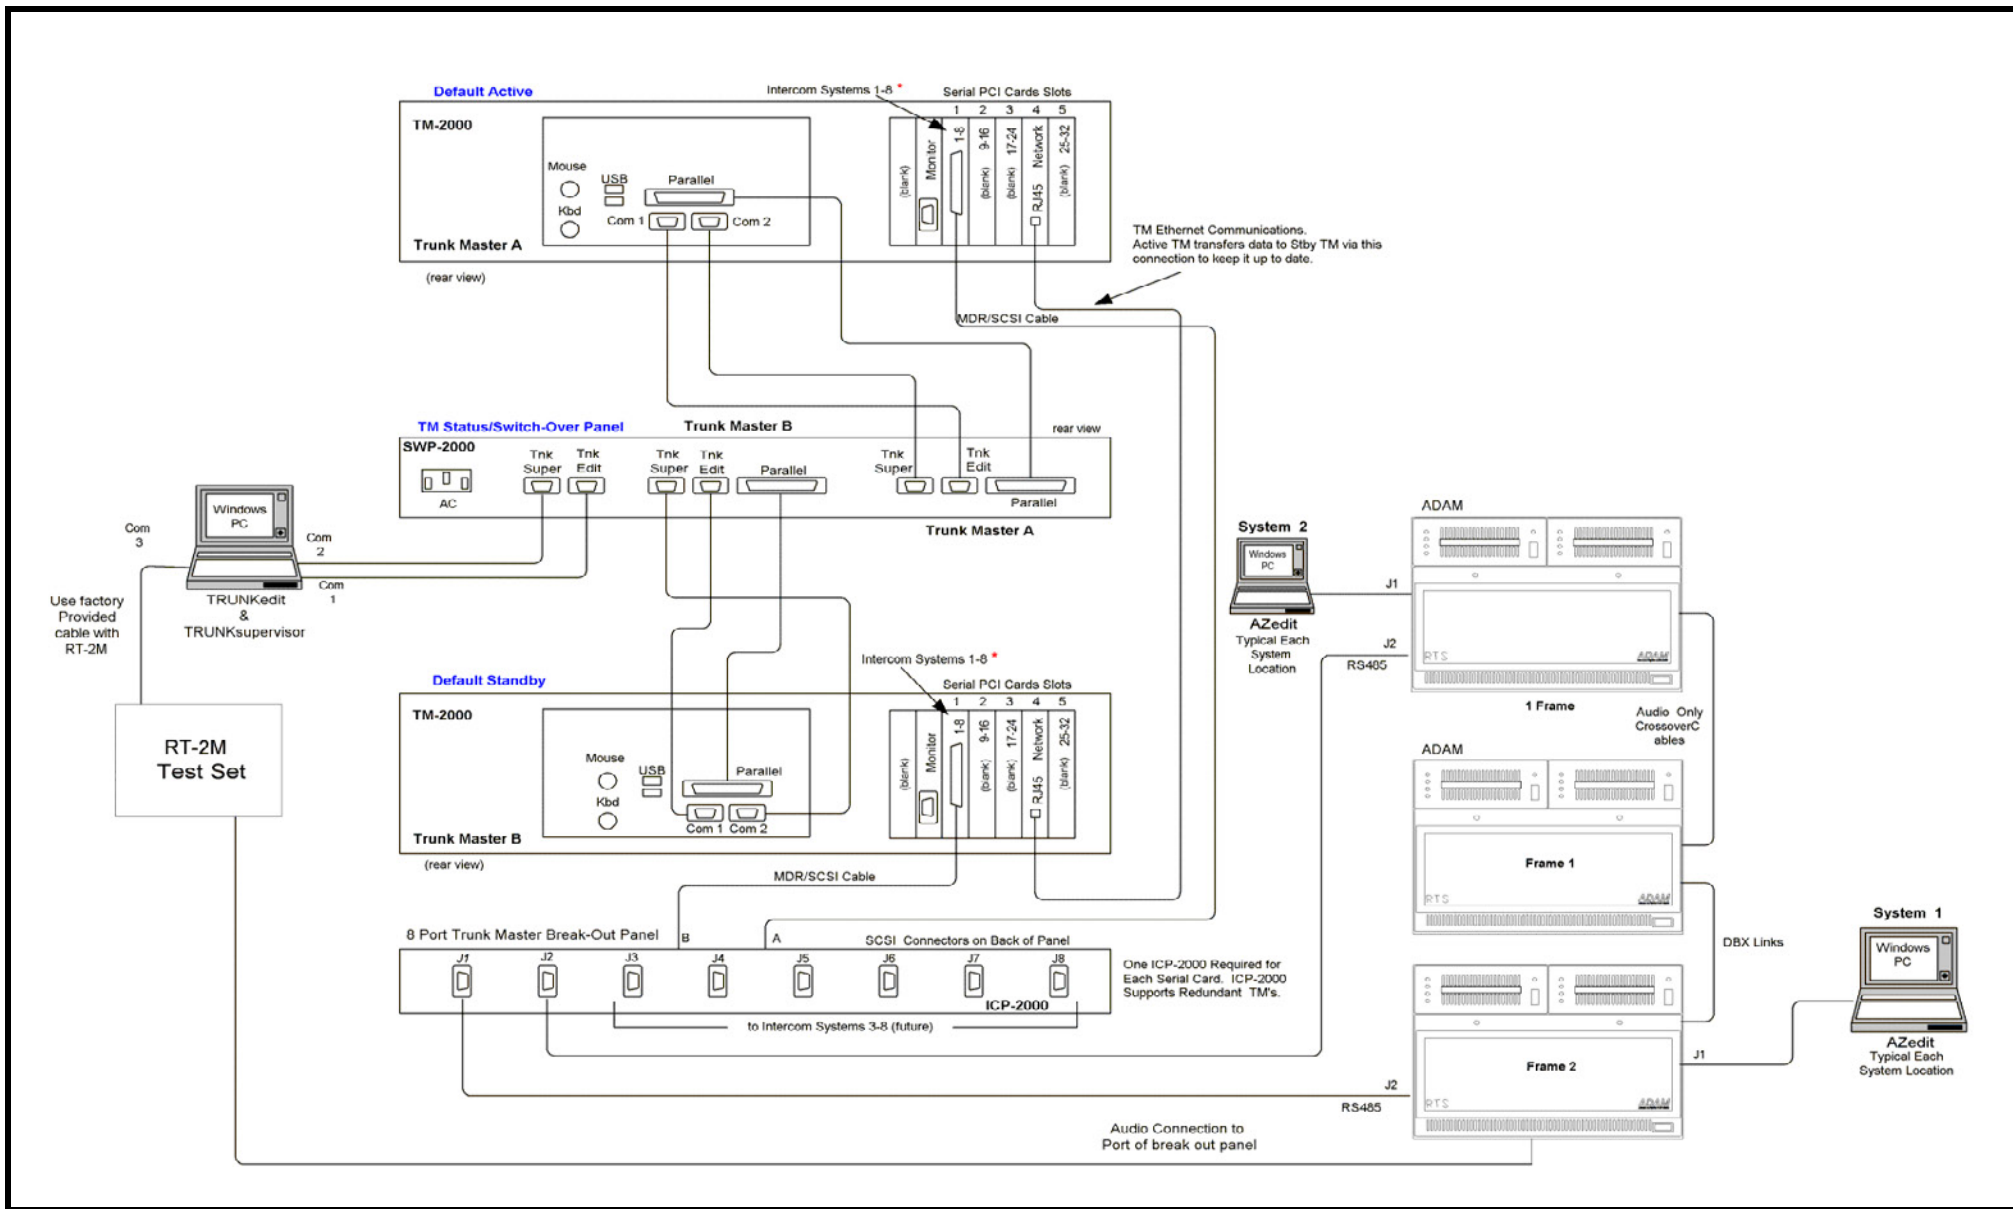

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>