

RPB623 PHANTOM HEX

Six Channel Phantom Power Supply


The RPB623 is an ultra clean six channel 48 volt phantom power supply. The unit powers up to six condenser microphones for use in digital multitrack recording situations, or contractor applications where several mics must be powered from a single source.

SPECIFICATIONS

Connectors:	6 ea. XLR female jacks (pin 2 hot) 6 ea. 1/4" TRS jacks (tip positive)
Phantom Power Voltage:	48 Volts
Max Phantom Power Current:	14 mA each channel
Power Supply:	Linear 120VAC 50/60Hz
Size (W x H x D):	19" x 1.75" x 2.5" (48 x 4.5 x 12.7)
Weight:	4 lbs.

FEATURES:

- 6 XLR Mic inputs and 1/4" TRS balanced outputs
- 48 Volts of regulated phantom power for each input
- Front panel LED indication for channel "in-use"
- Clean, quiet internal power supply
- Pull-down resistors and isolation capacitors on all outputs to minimize the possibility of equipment damage downline

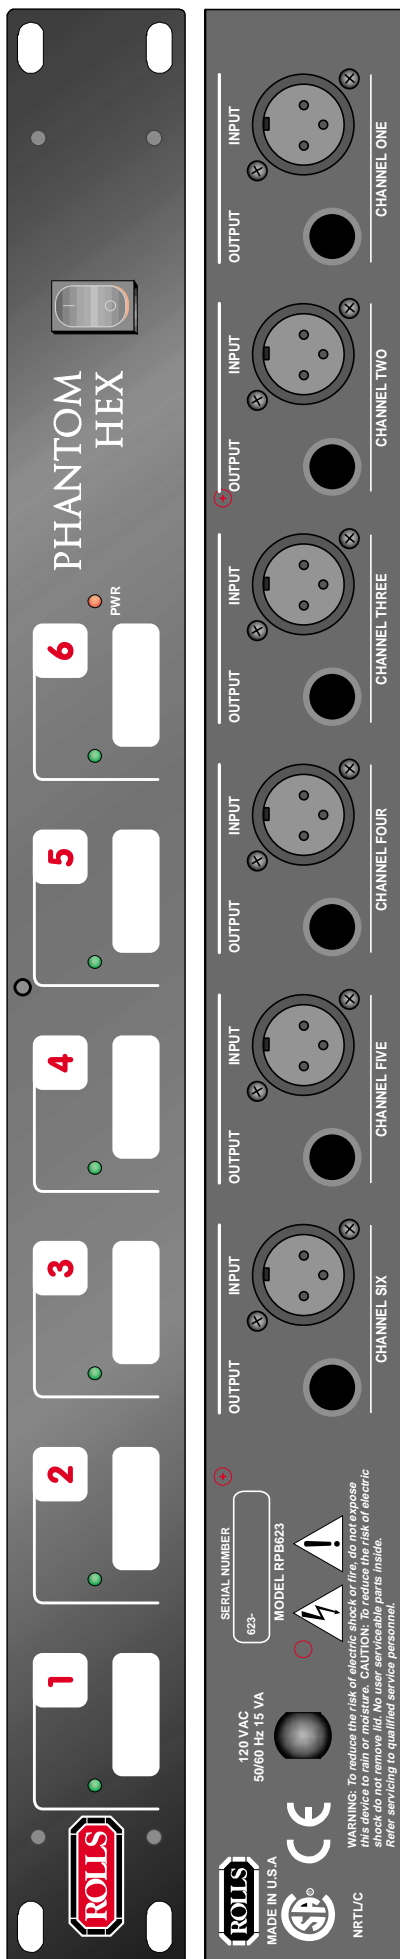

5968 South 350 West, Salt Lake City, UT, 84107
(801) 263-9053 FAX (801) 263-9068
rolls@rolls.com • www.rolls.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>