


Installing the Wall Mount Kit

Wall mount items (sold separately) allow you to mount the TV on a wall. For detailed information on installing the wall mount, see the instructions provided with the Wall Mount items. Contact a technician for assistance when installing the


۲

5EA (M4 X L8)




wall mounted bracket. Samsung Electronics is not responsible for any damage to the product or injury to yourself or others if you select to install the TV on your own


Remove the stand and cover the bottom hole with the cover




[QSG]BN68-02879E-Hotel.indd

Viewing the Connection Panel

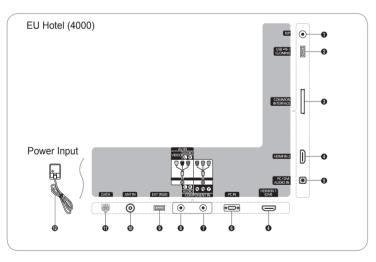

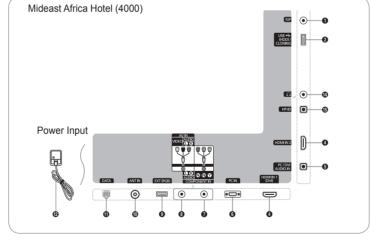

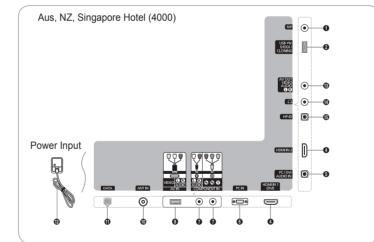

Wall Mount Kit Specifications (VESA)

Install your wall mount on a solid wall perpendicular to the floor. When attaching to other building materials, please contact your nearest dealer. If installed on a ceiling or slanted wall, it may fall and result in severe personal injury.

- > Standard dimensions for wall mount kits are shown in the table below. > When purchasing our wall mount kit, a detailed installation manual and all parts necessary for assembly are provided.
- Do not use screws that do not comply with the VESA standard screw specifications.
- > Do not use screws that are longer than the standard dimension or do not comply with the VESA standard screw specifications. Screws that are too long may cause damage to the inside of the TV set.
- > For wall mounts that do not comply with the VESA standard screw specifications, the length of the screws may differ depending on the wall mount specifications.
- > Do not fasten the screws too strongly; this may damage the product or cause the product to fall, leading to personal injury. Samsung is not liable for these kinds of accidents.
- > Samsung is not liable for product damage or personal injury when a non-VESA or non-specified wall mount is used or the consumer fails to follow the product installation instructions.
- > Our 57" and 63" models do not comply with VESA Specifications. Therefore, you should use our dedicated wall mount kit for this model.
- > Do not mount the TV at more than a 15 degree tilt.
- > Always use two people to mount the TV to a wall.

roduct amily	inches	VESA Spec. (A * B)	Standard Screw	Quantity
LED TV [Ultra-Slim]	19 ~ 22	75 X 75	M4	
	23 ~ 29	200 X 100		4
	32~37	200 X 200	M8	
	40~55	400 X 400		
	56~65	600 X 400]	

/1\

Do not install your Wall Mount Kit while your TV is turned on. It may result in personal injury due to electric shock.


- 0 RJP
- **2** USB (HDD) / CLONING
- **3** COMMON INTERFACE
- HDMI IN 1(DVI), 2
- PC / DVI AUDIO IN
- O PC IN
- COMPONENT IN
- O AV IN
- EXT(RGB)
 EXT(RGB)
- O ANT IN
- DATA

- Used to support data communication between the TV and the SBB.


- Power input
- AV OUT
 - AUDIO OUT
 - VIDEO OUT
 - (DTV signal is unsupportable. This output is only for Analogue video signal.)
- Headphones jack
- HP-ID

A

Connecting the TV with SBB

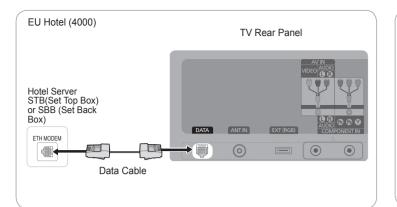

TV Rear Panel

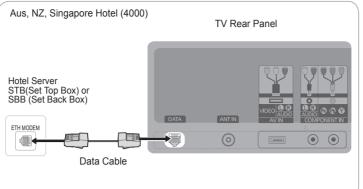


1. Connect the [DATA] jack of the TV to the [ETH MODEM] jack of the STB (SBB) with the Data cable. Use data communication.

List of Vendors for Compatible Data Cables Supplied with the TV


• Refer to the code label on the data cables.






- Hotel Plug & Play is a function that automatically performs the Hotel mode selection, Country Setup, Clock Setup and Picture mode Setup once.
 - Hotel Plug & Play is available only one time when power is first turned ON.
 - After setting up first TV and Clone TV to USB
- Next TV only needs to exit Hotel Plug & Play, connect USB, then Clone USB to TV.
- Ul Scenario

۲

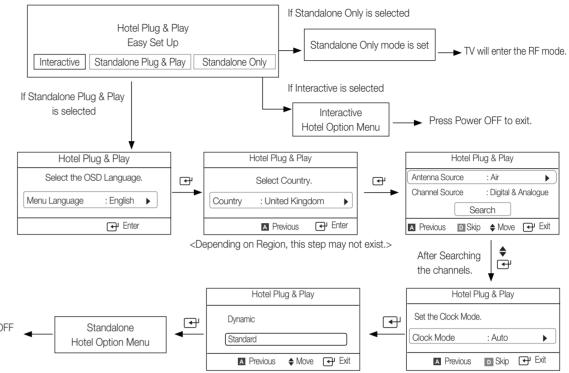

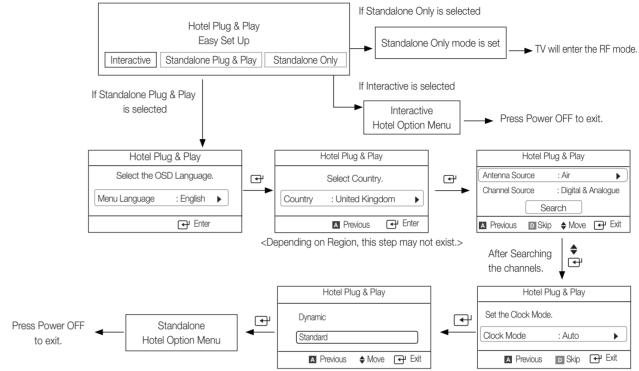


Specifications

I	ltems	Specification	Comment				
TV System	ı	ATSC / NTSC3.58		Contact SAMSUNG WORLDWIDE			
		26inch : 5W x 2		If you have any questions or comments relating to Samsung products, please co the SAMSUNG customer care center.			
Audio out	Speaker out	32inch : 10W x 2					
	Variable Audio	4W X 1, 8 ohm SPK'	RCA Jack output OTL Sound output	Country AUSTRIA	Customer Care Centre 🕿 800-112233		
	Audio out	500mVrms	Phone Jack, Monitor	FINLAND	0771-400002		
	Audio out	5001111115	out	FRANCE	0825-022062		
DC out	12V out	Max 1.5A	Change output	GERMANY	01805-471101		
	0		voltage	HUNGARY	0640-985985		
	Component	Y, Pb, Pr, Audio-L/R		ITALIA	800-194194		
	PC	D-sub, Audio-L/R		NETHERLANDS	015-2197000		
	A/V	Audio Video Jack		POLAND	0-801-B2BSAM (222726)		
	EXT	Scart Jack (EU, Mideast Africa Only)		PORTUGAL	808-B2BSAM		
	HDMI	Compatible with the HDMI Specifications	DVI is Supported	SPAIN	0902024-010		
				UNITED KINGDOM	+44 (0) 845 8414141		
	A =10 = = 0	•		SOUTH AFRICA	0860-SAMSUNG(726-7864)		
Data	Antenna DATA	75 ohm Unbalanced, Din Jack RJ-12	VHF/UHF/CATV	U.A.E	800-SAMSUNG (726-7864) 8000-4726		
	Ex-Link	RS232	Jack Pack Only, TeleAdapt RJP Only	AUSTRALIA	1300 362 603		
Operating	temperature	50°F ~ 104°F(10°C ~ 40°C)		NEW ZEALAND	0800 SAMSUNG (726-786)		
Operating	Humidity	10% ~ 80%	non-condensing	SINGAPORE	1800-SAMSUNG (726-7864)		
Storage Te	emperature	-4°F ~ 113°F(-20°C ~ 45°C)					
Storage Hu	umidity	5% ~ 95%	non-condensing				

Design and specifications are subject to change wi linout prior notice

> For the power supply and Power Consumption, refer to the label attached to the product.

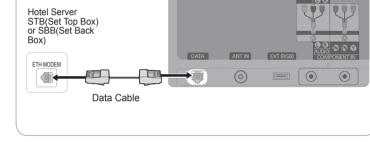

Mixed Channel Map

۲

Mideast Africa Hotel (4000)

Mixed Channel Map is a function to mix Air and Cable channels.

[If there are no Cable channels, you can use this item as channel sorting.]

- Mixed channel Map, Channel Editor and Channel Auto Store are newly placed in Hotel Option Menu
- Mixed channel Map should be ON in order to mix Air and Cable channels.
- Use Channel Editor to sort the channels as user-desired channel numbers.

Hotel Mode	ON	RJP Priority AV		Logo Download	
SI Vendor	OFF	RJP Priority PC		Logo Display Time	
				Energy Saving	
		Sub AMP Mode			
Picture Menu Lock	OFF	PMOLED Test	Failure	Welcome Message	
Channel Editor		PMOLED Mormal Dim.			
Music Mode AV	OFF	PMOLED Standby Dim.			
			OFF	Mixed Channel Map	ON
		Menu Display	ON	Channel Auto Store	
Music Mode Backlight		Hotel Logo		Dynamic SI	OFF

<Depending on model and region, some menu items may not exist>

Simple Steps for channel mixing under Stand-alone Mode

Step	Broad Outline			
1	Turn on 'Mixed Channel Map' in Hotel Option Menu			
2	Operate 'Channel Auto Store' in Hotel Option Menu (Antenna Source : Air + Cable)			
3	Enter 'Channel Editor' in Hotel Option Menu			
4	Compile a table related to the final channel lists you want to have			
5	Rearrange channels with TOOLS Button based on the table you compiled			
6	Press EXIT or RETURN Button to exit.			
	<for better="" comprehension,="" details="" following="" please="" refer="" the="" to=""></for>			

SAMSUN

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com