


48X/24X/48X/16X Max. Combo CD-RW/DVD-ROM Drive CRX300A

Super Fast CD-RW/DVD-ROM Drive Compatible with
Microsoft® Windows® 98SE,
Windows® Millennium Edition,
Windows® 2000 Professional,
or Windows® XP Home/Professional
Operating Systems

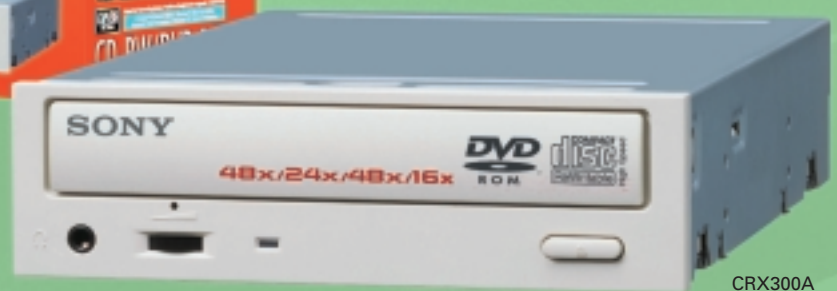

CRX300A

- Super Fast 48X max. CD-R and 24X max. CD-RW Burning
- 16X max. DVD-ROM Reading
- Power-Burn™ Conformed* Buffer Underrun Protection Technology
- Includes Software for CD burning and DVD Video playback

*Buffer underrun protection technology is conformed to Sony's Power-Burn™ drive specifications.

CRX300A

FEATURES AND BENEFITS

- Ultra quick 48X Max. CD-R burning, creates a full CD-R disc in about 2 minutes
- DVD-ROM reading and DVD Video Playback
- Ideal for sending pictures, video, and your own original music to others, or for backing up your system
- Power-Burn™ conformed* buffer underrun protection feature for smooth, reliable burns
- Comes with Nero® software for traditional CD burning tasks, InCD® software for easy “drag & drop” burning of files and folders to CD, and Cyberlink PowerDVD® software for watching DVD movies on your PC
- Internal EIDE/ATAPI drive for installation in a Microsoft® Windows® operating system environment

SPECIFICATIONS

PART NUMBER	CRX300A
DRIVE TYPE	Internal
MEDIA & MODES SUPPORTED	CD-R, CD-RW, CD-ROM (Mode 1 & Mode 2), CD-ROM XA (form 1 & form 2), CD Audio, Video CD, CD Extra, Multi-Session, Packet Writing, DVD-ROM, DVD-Video
READ/WRITE SPEED	CD-R Write: 8X, 12X, 16X CLV, 24 ~ 40X P-CAV, 48X CAV (turbo mode) max. CD-RW Write: 4X, 8X, 10X, 12X CLV, 16 ~ 24X CAV max. CD Read: 48X max. DVD Read: 16X max.
SUSTAINED DATA TRANSFER RATE (CD-R/RW DISCS):	1,200 kB/s (8X CD-R/RW read/write) 1,800 kB/s (12X CD-R/RW read/write) 3,600 kB/s (24X CD-R/RW read/write) 7,200 kB/s (48X CD-R read/write max.)
RANDOM ACCESS TIME	90 ms CD, 100 ms DVD
INTERFACE	ATAPI/EIDE
LOADING MECHANISM	Motorized tray
MOUNTING	Vertical or Horizontal
BURST TRANSFER RATE	PIO Mode 4: 16.7 MB/s, Ultra DMA Mode 2: 33.3 MB/s
BUFFER MEMORY	2 MB
POWER REQUIREMENTS	+5V / +12V V DC
POWER CONSUMPTION	+5V: 1.5A / +12V 1.5A
DIMENSION (W x H x D)	5.75 x 1.63 x 7.49 inches
WEIGHT	Approx. 2.2 lbs.
PACKAGE CONTENTS	CRX300A Drive ATAPI Cable Software installation CD-ROM: Nero® Burning ROM, InCD®, Cyberlink Power DVD® Mounting Screws Quick Start Guide Limited Warranty Card
SYSTEM REQUIREMENTS	Intel® Pentium® II processor 400 Mhz or faster (or equivalent) CPU, 64 MB RAM, 1 GB available hard disk space recommended. Microsoft® Windows® 98SE, Windows® Millennium Edition, Windows® 2000 Professional, or Windows® XP Home/Professional operating systems
WARRANTY	One Year Limited

*Buffer underrun protection technology is conformed to Sony's Power-Burn™ drive specifications.

PLEASE RECORD RESPONSIBLY. BEFORE COPYING ANYTHING ONTO A CD-RW OR CD-R DISC, PLEASE BE SURE YOU ARE NOT VIOLATING COPYRIGHT LAWS. MOST SOFTWARE COMPANIES ALLOW YOU TO MAKE A BACK-UP OR ARCHIVE COPY OF SOFTWARE. CHECK THE TERMS OF YOUR SOFTWARE LICENSE AGREEMENT FOR SPECIFIC DETAILS.

MEDIA COMPATIBILITY



Sony Electronics Inc.
Information Technology Products Division
3300 Zanker Road
San Jose, California 95134
<http://www.sony.com/storagebysony>
<http://www.sony.com/mediabysony>

Storage by Sony™

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>