
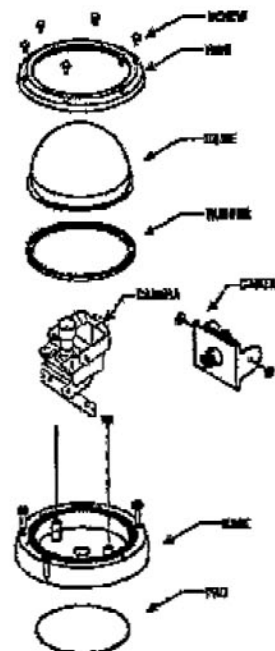




HT-8WMTDV Series

Wall / Ceiling Mount Tamperproof Dome High Resolution Cameras

IMAGE PICK-UP DEVICE	1/3" Sony HQ-1 with Support DSP / 768(H) x 494(V)
RESOLUTION	More Than 580TV LINES
AUTO IRIS VARIFOCAL LENS	Standard: 4mm to 9mm Varifocal DC Auto Iris Lens
OTHER AVAILABLE LENSES	HT-8WMTDV/4-12 (4~12mm auto iris); HT-8WMTDV/2.6-6 (2.6~6mm auto iris)
MINIMUM ILLUMINATION	0.5 LUX at F1.2 (AGC ON)
BACK LIGHT COMPENSATION	BUILT-IN (ON)
ELECTRONIC SHUTTER	1/60 ~ 1/100,000 sec
WHITE BALANCE	A W B
AGC	BUILT-IN (ON)
Function Switch	White Balance Indoor,Outdoor Mode (AWB1,2,3); Anti-Color Rolling Mode(ANTI CR); Mirror Image Mode (MIRROR); Back Light Compensation Off Mode(BLCOFF); Flicker less Mode(FKON); Auto Gain Control Enlargement Mode(AGCMAX); Gamma Select Mode(GAMMA); Electronics Shutter Control Exposure Mode(MIRIS)
POWER SOURCE	12 Volts DC , , Regulated UL/CSA POWER SUPPLY INCLUDED
VIDEO OUTPUT	1.0V (p-p) NTSC COMPOSITE VIDEO
SCANNING SYSTEM.	2:1 INTERLACE – 525 LINES / 60 FIELDS / 30 FRAMES
S / N RATIO	MORE THAN 50dB (AGC OFF)
OPERATION TEMPERATURE	-20F~+120F
WEIGHT & SIZE	2 Lbs Size: 6.29 inch (160mm) * 3.89 inch(99mm)

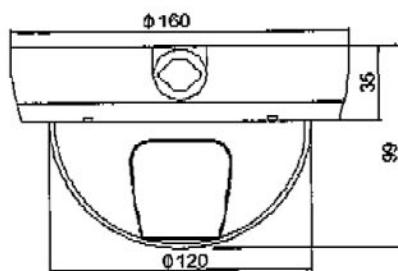

Speco Technologies
200 New Highway
Amityville, NY 11701
Tel: 631-957-8700
Fax: 631-957-9142
www.specotech.com

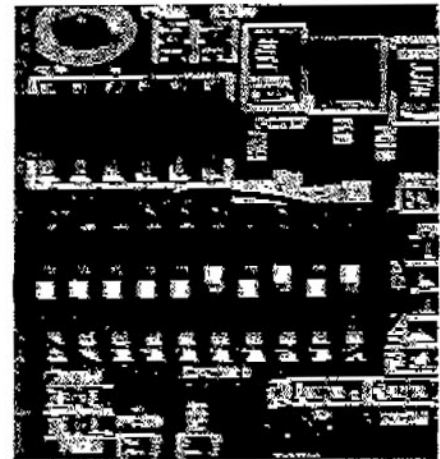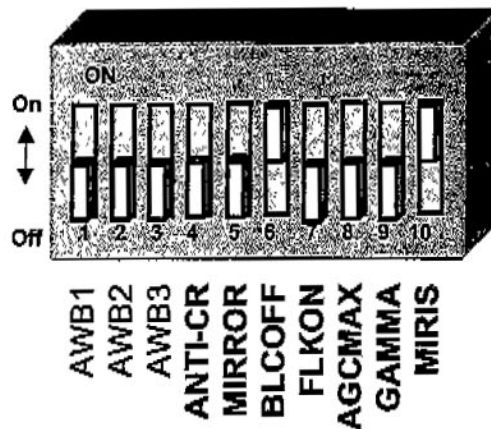

***. Mode select**

FL : Flicker Less mode

BLC : Back Light Compensation mode

ANTI-CR : Anti Color Rolling mode. (White Balance Full Auto setting)

MIRROR : Mirror Image output mode

***. Video Output signal Level select**

GAMMA : Monitor matching **GAMMA** Value Setting

AGC MAX : Automatic Gain Control Maximum Gain Value Setting

***. Lens select**

E-IRIS : Electronic shutter speed Light control Lens

M-IRIS : Mechanical IRIS Light control Lens

	1	2	3	4	5	6	7	8	9	10
ON	AWB1	AWB2	AWB3	ANTI-CR	Mirror	BLC off	FL on	AGC Range 10~38 dB	GAMMA 1.0	M-IRIS
OFF				Normal	Normal	BLC on	FL off	AGC Range 10~28 dB	GAMMA 0.45	E-IRIS

Function Key Description

* AWB – Auto White Balance Mode

* ATW- Auto Trace White Balance mode

(ATW is a feedback system that automatically aligns the white balance by detecting the R-B)

* Anti CR- Anti-color-rolling; When shooting with a NTSC camera under fluorescent lighting with a 60 (Hz) power supply, cyclic color changes with a long period appear. This is called color-rolling. Anti-color rolling mode can be set regardless of the AWB mode by setting the anti-color-rolling mode to ON and color-rolling-less AWB to ON.

* Mirror function – The video signal which reversed right and left can be outputted by using the mirror function. (notes: it has no top/bottom reversal function)

* BLC off – Deactivates backlight compensation.

* NORMFLC mode – Flicker-less Function; when NORMFLC is 0, the general range around the speed selected for the electronic shutter fixed method (NTSC: 1/100[sec], PAL: 1/120[sec]) is a reference point. For shutter control faster than this, compensation control is performed through shutter speed modulation flicker-less function. Control at lower speed is performed through AGC gain modulation flicker-less control.

* AGCMAX – Enables switching two types of AGC (Automatic gain control) maximum gain.

* MIRIS – Mechanical Iris mode; this is an examples of a lens with an automatic iris which operates using a power supply and video signal. In the MIRIS mode the shutter speed is always 1/60 sec for NTSC and 1/50 sec for PAL, and the backlight compensation amount is output and supplied as a voltage to an external circuit.

CAMERA INSTALLATION

Connections:

1. Using the 12-Volt DC power supply in the box
-CONNECT POWER TO THE POWER JACK.



2. CONNECT VIDEO CABLE

- CONNECT BNC CABLE TO THE BNC JACK.



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>