



# Web Ready DVR System

w/ Integrated 7" LCD and 4 Outdoor Night Vision CCD Cameras

COMPLETE SYSTEM

**1 YEAR  
WARRANTY**  
Manufacturer Defects

**BONUS**



Window  
Warning  
Stickers

**ULTRA  
COMPACT**



 **Wired**


**160GB HDD Records  
up to 40 Days**

**Hi-Res CCD  
Cameras**

**Triplex DVR  
w/ USB Backup**

**Model #:  
CLEARVU1**  
[www.svat.com](http://www.svat.com)

# Web Ready DVR System w/ Integrated 7" LCD and 4 Outdoor Night Vision CCD Cameras

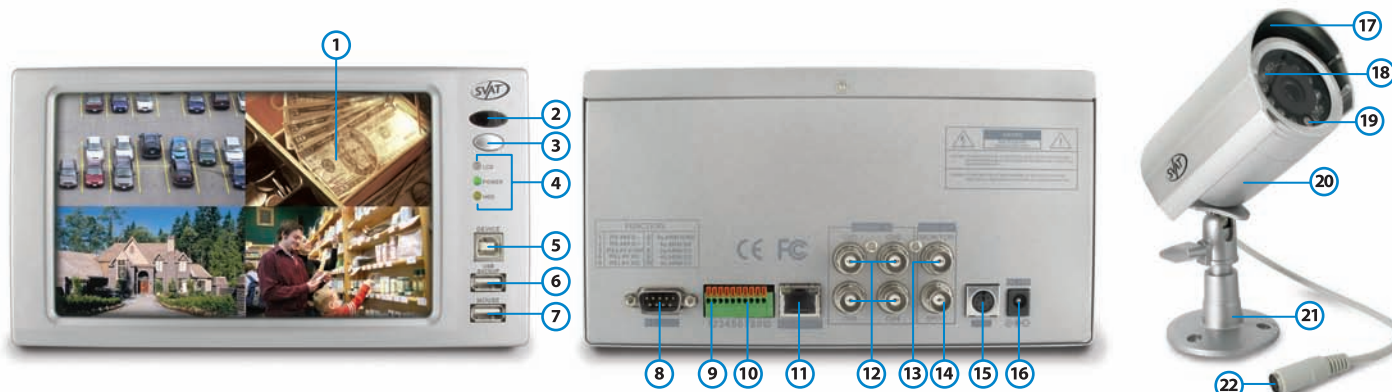

- 1. 7" LCD Screen**  
Watch your footage directly on the DVR.
- 2. Infrared Remote Sensor**  
Receives the signal from the remote control.
- 3. Screen On/Off Button**  
Turns LCD Monitor On / Off.
- 4. LED Indicators**  
LEDs light up when the LCD, Power or HDD are in use.
- 5. Device Port**  
Upgrade firmware through a PC USB connection. (optional)
- 6. USB Port**  
Connect a USB flash drive or USB HDD for backup purposes.
- 7. USB Mouse Port**  
Connect a USB mouse for easier control of the DVR.
- 8. RS-232C Port**  
Allows you to control the unit with a PC.
- 9. RS485 Port**  
Allows you to connect a pan/tilt/zoom (PTZ) camera and control it with the DVR.
- 10. Alarm Input/Output**  
4 Alarm input sensors and 1 relay output.
- 11. Ethernet Port**  
For connection to your local area network and Internet.
- 12. BNC Video Inputs**  
Connects the cameras to the DVR.
- 13. BNC Video Output**  
For connection to your TV/monitor.
- 14. SPOT Video Output**  
Additional connection to your TV/monitor, only displays video when motion recording is activated.
- 15. PS/2 Mouse Port**  
Allows you to control the unit with a PS/2 mouse.
- 16. Power Input**  
DC power input (12V).
- 17. Sun Shield**  
Helps prevent glare from bright lights.
- 18. Infrared (IR) LEDs**  
Allows the camera to see in the dark up to 15ft away.
- 19. CDS Sensor**  
Turns on the infrared LEDs when it gets dark.
- 20. Camera Housing**  
Made of anodized aluminum to prevent rust.
- 21. Camera Mount**  
Allows the camera to be desk or wall mountable.
- 22. Connection to Extension Wire**  
Converts to RCA.

## WHERE DO I USE THIS?

At **home** to watch your:

- Garage
- Backyard
- Property
- Driveway



At **work** to watch your:

- Entrance Ways
- Employees
- Parking Lot
- Warehouse



## SPECIFICATIONS (for more detailed specifications visit [www.svat.com](http://www.svat.com))

### INDOOR DVR

Display .....	7" Color TFT-LCD
Functionality .....	Triplex
Video Compression .....	MJPEG
File Format .....	AJP
Resolution .....	NTSC : 704 X 480 / PAL: 704 X 576
Recording Frame Rate .....	30FPS (Fully Adjustable)
Recording Time .....	Max 40 Days Continuous
Recording Method .....	Record as Each, Playback in Quad and Full Screen
Recording Qualities .....	Lowest, Low, Normal, High, Highest
Recording Modes .....	Motion Record, Continuous Record
Recording Media .....	HDD (Backup via USB)
Storage Capacity .....	160GB HDD Included
Video Format .....	NTSC/PAL
Video Inputs .....	4 CH Composite BNC
Video Display Output .....	2 CH Composite BNC (Monitor/Spot)
Network Protocol .....	TCP/IP, DDNS, DHCP, PPPoE
Network LAN IP .....	Static, Dynamic
Network Connection .....	10/100 BaseT Ethernet (RJ-45)
Play Search Mode .....	Percentage, Time/Date, Event list
Processor .....	Samsung ARM 9
Power Input .....	12V DC 5A
Power Adapter Input .....	100V 50/60HZ~240 50/60HZ

### OUTDOOR CAMERA (CV67)

Camera Type .....	Bullet
Image Sensor .....	1/4" Color CCD
Resolution .....	420 TV Lines
Outdoor Use .....	Yes
IP Rating .....	IP65
Focal Length .....	3.6mm
Night Vision .....	Yes
Number of IR LEDs and Range .....	12, up to 15ft
IR LED Control .....	Automatic (CDS Sensor)
Min. Illumination .....	0 lux
Video Output .....	4 PIN DIN to RCA w/ 60ft Extension Wire
Viewing Angle .....	60 Degrees
Housing Material .....	Anodized Aluminum
Camera Power Input .....	DC 12V 300mA
Power Adapter Input .....	120V 60HZ

### DIMENSIONS

DVR: 8.5" x 6.5" x 4.75" ~ 5.5lbs  
Camera: 4" x 2.25" x 2.25" ~ 0.6lbs

## WHAT IS INCLUDED WITH THIS SYSTEM?



- Software CD
- 6 RCA to BNC Connectors
- 1 Power Adapter for DVR
- 4 Power Adapters for Camera
- Mounting Hardware
- 1 Year Warranty
- Quick Start Guide
- Instruction Manual
- 4 Window Warning Stickers
- Online/Toll Free Tech Support

## WHAT IS COMPATIBLE WITH THIS SYSTEM?

The CLEARVU1 is compatible with TVs, computers, all SVAT cameras with RCA outputs and other SVAT systems including:



## UPC #

CLEARVU1 ~ 871363006509

## SVAT Electronics

4080 Montrose Road  
Niagara Falls, ON L2H 1J9  
Toll Free: 1.866.946.7828

now you can see



Download from [www.Somanuals.com](http://www.Somanuals.com). All Manuals Search And Download.

SVAT, ClearVu and "now you can see" are trademarks of SVAT Electronics.  
©2007 SVAT Electronics  
All Rights Reserved



**Model #:**  
**CLEARVU1**  
[www.svat.com](http://www.svat.com)

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>