

DVR4-Net

4 Camera Digital Video Recorder for Network & Web Monitoring



- Quality 4 camera remote monitoring & recording
- LAN & WAN ready, connects to your existing network
- Use with any TV, monitor & security cameras
- Easy installation, set & forget operation with remote control
- Safeguard your home: monitor baby, kids, nanny, parties, vacations
- Protect your business: oversee customers, staff, store, parking lot
- Features: motion detection, audio monitoring, intelligent searches & more

** Cameras Not Included, Sold Separately






DVR4-Net

4 Camera Digital Video Recorder for Network & Web Monitoring

The Swann DVR-4-Net is the next generation of do-it-yourself security and safety monitoring. Featuring four standard composite video inputs and 2 video outputs. It is the ideal CCTV system for small retail stores, homes or as a replacement for old fashioned time lapse recorders. Integrated motion activated recording also makes it ideal for covert observation systems. Control of the unit is via the front panel controls and on-screen display menu. Video recording is activated manually via alarm-inputs or automatically via built in motion detection. Recording speed & quality can also be setup via the on-screen-display. To playback, one needs to simply connect the unit to a monitor or TV, select an event and press play. Video can be played back at various speeds, in slow motion or frame-by-frame.

** Product does not include cameras, computers or monitor.

* In order to provide web access from anywhere in the world, the Swann DVR4-Net requires installation of software (included) on viewing PC and functioning internet connection. Swann recommends direct broadband connections for optimal performance.

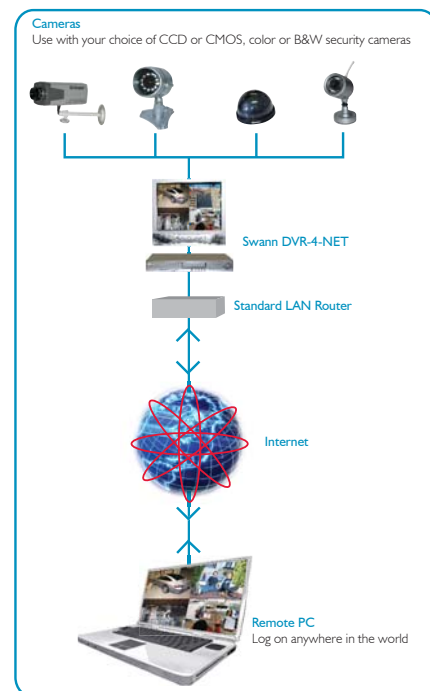

Product does not include cameras or monitor. Sold separately.

Technical Specifications

Motion Trigger Recording: Yes

Recording Mode: Manual / Alarm / Timer / Motion

Audio Input: 4 audio inputs, (RCA)

Audio Output: 1 audio output, (RCA)

Video Format: PAL/CCIR (AUS,NZ,UK) or
NTSC/EIA (USA)

Hard Disk Storage: Supported up to 250GB HDD

Camera Input Signal: Composite video signal | Vp-p 75
BNC, 4 channels

Primary Monitor Output: Composite video signal | Vp-p 75 BNC

Secondary Monitor Output: Composite video signal | Vp-p 75 BNC

Video Loss Detection: Yes

Recording Rate: Up to 240 field/sec. for NTSC /
200 field/sec. for PAL

Refresh Rate: Up to 30 frames/sec. for NTSC /
25 frames/sec. for PAL

Picture in Picture: Yes (Multi PIP)

Key Lock: Yes

Picture Zoom: 2 x 2 (Movable)

Camera Title: 8 letters

Video Adjustable: Hue/Color/Contrast/Brightness Adjustable

Alarm Input: TTL input, HI (5V), Low (GND)

Alarm Output: COM./N.O/N.C

Time Display Format: YY/MM/DD, DD/MM/YY, MM/DD/YY, OFF

Power Source: AC90-220V, 47Hz~63Hz

Operation Temperature: 10~40°C

Dimension (mm): 343(W) x 223(H) x 59(D)

LAN: RJ 45 10/100 Auto Sense

Package Contents

DVR4-Net

Hard Drive Tray & Key

Power Adaptor

Power Cable

Remote Viewing Software (PC Only)

6 x BNC to RCA Adaptors

Remote Control - Requires 2 AA batteries (not included)

Instructional Manual (Manual only available in English)



Please note that the information contained within this document is subject to change without notification.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>