



U s e r m a n u a l
 Manuel d'utilisation
 Bedienungsanleitung
 Manuale di utilizzazione
 Manual de utilización
 Manual de instalação
 Gebruiksaanwijzing
 Installationsvejledning
 Bruksanvisning
 Brukerhåndbok
 Käyttöohje
 Használati Utmutató
 Instrukcja obsługi
 Pykkoactbo no ökcnyatunhm
 Návod k použití
 R R 2 0 0 P L L
 R R 2 0 0 P L L

THOMSON



THOMSON
 multimedia
 4 6 / 4 7
 quai A. Le Gallio
 92648 Boulogne
 C E D E X
 F R A N C E
 RCS Nanterre
 B 322 019 464
 R R 2 0 0 P L L
 R R 2 0 0 P L L

THOMSON

CE
 S50 207 10
 S50 207 30




MAINS CONNECTIONS (FOR UNITED KINGDOM ONLY)

CAUTION:

Do NOT under any circumstances plug the severed plug into any mains socket as this could result in electric shock.

Do NOT make any connection to the terminal in the plug which is marked by the letter 'E' by the earth symbol or coloured green and yellow.

A fuse plug must be fitted with a 3A fuse approved by ASTA or BSI to BS 1362 and fuse covers must always be securely replaced. If your RR-200PLL/RR-200PLM does not work, the fuse may be blown.

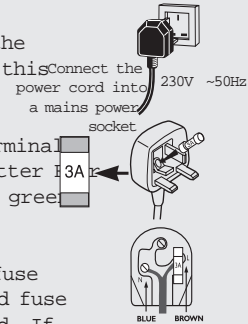

USEFUL ADVICE



- Do not use your set immediately after transport from a cold place to a warm place: there may be condensation problems.
- This set uses a laser beam. To prevent any accident due to this type of beam, the set should only be opened by properly-trained personnel.
- Make sure that you keep your set away from water and high temperatures.
- If you do not use your set on battery power for more than one month, we advise you to take out all the batteries.
- To prevent personal injury, do not reverse any battery and do not mix battery types.



ECOLOGY



- Help protect the environment - we recommend that you dispose of used batteries by putting them into specially designed receptacles.


MAINTENANCE




- Clean the unit with a soft cloth, or a damp chamois leather. Never use solvents.

THE DIGITAL TUNING CLOCK RADIO

Setting time




- 1 Press SET until and show
- 2 Press to set minute
- 3 Press to set hour
- 4 Press SET to complete the setting



Adjusting display brightness

You may slide at the back of the unit to vary the LCD display brightness.

Listening to radio



- 1 Press to turn on the radio
- 2 Press BAND to select FM/LW (RR-200PLL) or FM/MW (RR-200PLM)
- 3 Press to your desired station
- 4 Adjust to your desired listening level



- To improve reception, you may try and reposition the unit or extend the FM aerial wire
- Press and hold for 2 sec to tune automatically
- If stations are in memory (see "Setting memory" for reference), you may and above and press the memory buttons to access the corresponding memorised stations directly
- To turn off the radio, again




THE DIGITAL TUNING CLOCK RADIO

Using INTRO-SCAN

GB

Intro-scan function allows you to listen to each tuned channel for a play period of up to 10 seconds.




- During the play period, you may:
 - Press **[-]** or **[+]** to keep scanning or change scanning direction
 - Press **MEMO** to set memory (see "Setting Memory" for details)
- During the scanning or play period,
 - Press **INTRO-SCAN** to exit the intro scan function



Setting memory

You may preset up to 10 radio channels

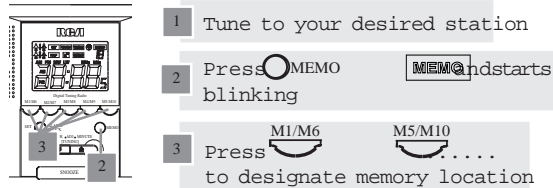


1. Press the memory buttons once to select M1...M5, twice to select M6...M10
2. To exit from memory setting, press **MEMO** until and the location number go off



THE DIGITAL TUNING CLOCK RADIO

Setting NAP

The NAP alarm allows you to take a nap for a period of 15 minutes up to 2 hours. After the set time period lapses, the NAP alarm will sound to wake you up.




- While in NAP mode, presses **NAP** will show the remaining time before the alarm sounds.
- To stop NAP buzzer from sounding, press **RADIO on/off** until goes off
- To turn off the NAP cycle, press and hold **NAP** until goes off



Sleep to radio

You can drift off to sleep to radio knowing that the unit will turn itself off automatically. If alarm is set, the unit will turn on again as programmed.

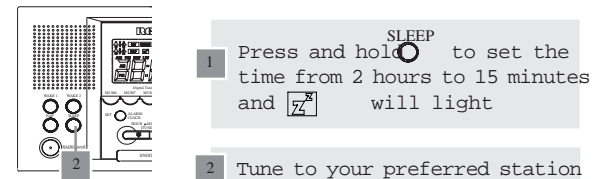

- If you decide to turn off the unit soon, press **SNOOZE** or **RADIO on/off** and this will shut off the sleep cycle.
- When sleep mode is active, subsequent presses on **SLEEP** will show the remaining time before the unit goes off.
- This unit allows you to "Sleep to one radio station and wake to another" (see "Setting alarm with music" for setting alarm(s))
- If desired radio station is not selected, the unit will sleep to the last receiving station.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>