



4-Port Rack Mount DVI KVM Switch w/ Audio TK-404KR

TRENDnet's TK-404KR 4-port DVI-KVM encompasses all your multimedia and multi-tasking needs into one cost effective solution. Manage multiple PC's effectively while enjoy audio-rich features with one set of LCD monitor, keyboard, mouse, microphone, and speakers.

FEATURES

- 4-Port DVI PS/2 and Audio KVM Switch with Enhanced Digital Video Support
- DVI-I Interface Technology Supports Pure Digital Video Signal Transmission
- Compatible with DVI-D (Digital Only) Connector
- Supports Microsoft IntelliMouse, IntelliMouse Explorer, Logitech NetMouse and more
- Enhanced Digital Video Support up to 1600 x 1200 High VGA Resolution
- Direct Channel Selection and Operation using Push Buttons or Hot-Key Commands
- Auto-Scan Mode for monitoring PCs and Beeping Sound for Switching Confirmation
- Numerical LED Display for Easy Monitoring (One 7-Segment LED)
- Share Audio and Microphone between Multimedia PCs
- Supports DOC, Windows 95/98(SE)/ME/2000/XP, Linux and more
- Plug & Play and Hot-Pluggable
- EIA-19" (1U) Rack-Mountable (kit included)
- 2-Year Warranty

BENEFITS

Integration:

Does not require driver/software for the installation and operation.

Friendly:

Switch between PCs with the push button or Hot-Key operation.

Flexible:

Hot-Plug feature, add PCs or remove connected PCs without powering off the KVM switch or the other PCs.

Cost Effective:

Manage two PCs with single keyboard, monitor, mouse and speakers/microphone. Save on equipment cost, utility, and space.

Performance:

Support High Digital Video Quality up to 1600 x 1200.


4-Port Rack Mount DVI KVM Switch w/ Audio

TK-404KR

SPECIFICATIONS

Hardware	
Interface	<ul style="list-style-type: none"> DVI-I & DVI-D Compliant
PC Port Connector	<ul style="list-style-type: none"> 4 x PS/2 Keyboard 6-pin Mini Din (Female) 4 x PS/2 Mouse 6-pin Mini Din (Female) 4 x DVI-I Single Link (Female)
Cable Interface (All Male)	<ul style="list-style-type: none"> PS/2 Keyboard 6-pin Mini Din (Male) PS/2 Mouse 6-pin Mini Din (Male) DVI-I Dual Link (Male) Audio connector (Male) Microphone connector (Male)
Cable 4 sets of DVI-I Dual Link KVM Cable (1.8m/6ft)	<ul style="list-style-type: none"> To KVM: PS/2 Keyboard 6-pin Mini Din (Male), PS/2 Mouse 6-pin Mini Din (Male), DVI-I Dual Link (Male) To PC: PS/2 Keyboard 6-pin Mini Din (Male), PS/2 Mouse 6-pin Mini Din (Male), DVI-I Dual Link (Male), Audio connector (Male), Microphone connector (Male)
PC Selection	<ul style="list-style-type: none"> Push Buttons or Hot-Key Commands
Keyboard/Mouse Emulation	<ul style="list-style-type: none"> PS/2
Digital Display Resolution	<ul style="list-style-type: none"> 1600 x 1200
Power	<ul style="list-style-type: none"> 9V DC, 1A External Power Adapter
Dimensions	<ul style="list-style-type: none"> 220 x 100 x 45mm (8.7 x 3.9 x 1.8 inches)
Weight	<ul style="list-style-type: none"> 1000 g (35.2 oz.)
Temperature	<ul style="list-style-type: none"> Operating: 0°C ~ 40°C (32°F ~104°F) Storage: -20°C ~ 60°C (-4°F ~140°F)
Humidity	<ul style="list-style-type: none"> 0%~90% RH, Non-Condensing
Certifications	<ul style="list-style-type: none"> CE, FCC

NETWORKING SOLUTIONS

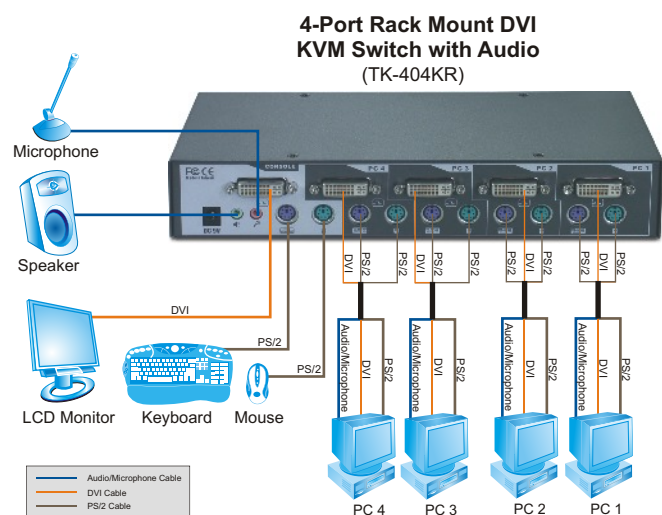

PACKAGE CONTENTS

- TK-408K
- 4-Port DVI Audio KVM Switch
- 4 sets of DVI-I Dual Link Cables
- Multi-Language User's Guide
- Power Adapters (9V DC, 1A)
- Rack Mount Kit

RELATED PRODUCTS

TK-204K 2-Port High Quality DVI KVM Switch w/Audio

ORDERING INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>