

# Personal PA<sup>®</sup> FM Monitor Receiver, Model PPA R751

## Description:



The R751 Monitor Speaker is ideal for cry rooms, nurseries, office areas or any location where a remote speaker is needed and wiring is difficult to run. It is designed to use with any Williams Sound PPA wideband transmitter, and will operate up to 150 feet away. System includes R751 receiver, slave speaker and ANT 026 whip antenna.

## Specifications:

<b>Dimensions:</b>	4.3" W x 8.9" H x 5.1" D (10.9 cm x 22.6 cm x 13 cm)
<b>Weight:</b>	5 lbs (1.9 kg)
<b>Color:</b>	Putty
<b>Power:</b>	120 VAC, 50 or 60 Hz, 60 VA max
<b>FCC ID:</b>	CNMR751
<b>Operating Freq.'s:</b>	Pre-tuned, adjustable, 72 MHz – 76 MHz
<b>FM Deviation:</b>	Wideband, 75 kHz, 75 $\mu$ S de-emphasis
<b>AFC Range:</b>	$\pm$ 160 kHz
<b>Sensitivity:</b>	5 $\mu$ V at 12 dB Sinad
<b>Freq. Response:</b>	115 Hz to 20 KHz, $\pm$ 3 dB Controlled by bass & treble
<b>Signal-to-Noise Ratio:</b>	50 dB at 10 $\mu$ V
<b>Audio Output Power:</b>	20 W RMS total
<b>Receive Antenna:</b>	39" telescoping whip (ANT 026)
<b>Loudspeakers (each):</b>	3" woofer, 1.25" tweeter, wide-range
<b>Headphone Jack:</b>	3.5 mm stereo
<b>Controls:</b>	ON/OFF pushbutton switch, rotary volume, bass, treble, and 3D pushbutton on/off (3D button boosts high freq. response.)
<b>Warranty:</b>	5 years, parts and labor 90 days on cords, antennas and other accessories
<b>Notes:</b>	The R751 Receiver can be field tuned to any of 10 wideband channels using the PLT 005 tuning tool. FCC Rules limit the use of the 72–76 MHz band to hearing assistance for the handicapped only.

## OPTIONAL ACCESSORIES

<b>Remote Antennas:</b>	ANT 005 Coaxial Antenna ANT 024 Wall Mount Dipole Antenna
<b>Wall Mount Kit:</b>	Consult factory
<b>Stand Mount Kit:</b>	Consult factory
<b>Compatible Transmitters (US Only)</b>	PPA T4      PPA T20 (wide-band) PPA T16      PFM T16 PPA T17      PFM T30 PPA T17–6    PFM T31ON Indicator Light: Green LED, glows when power is applied to the transmitter. There is no on/off switch. The T17 is designed to be left on continuously.

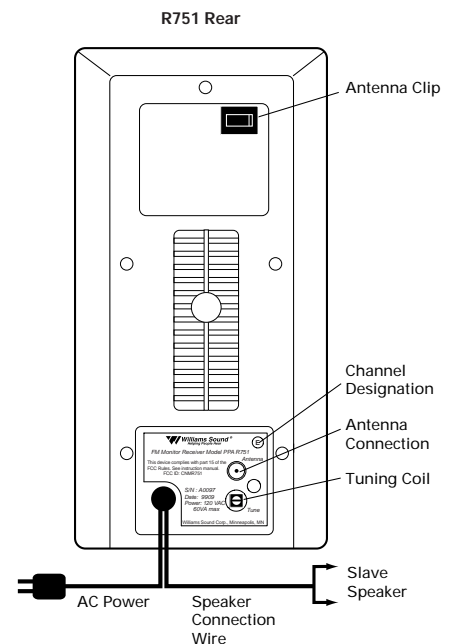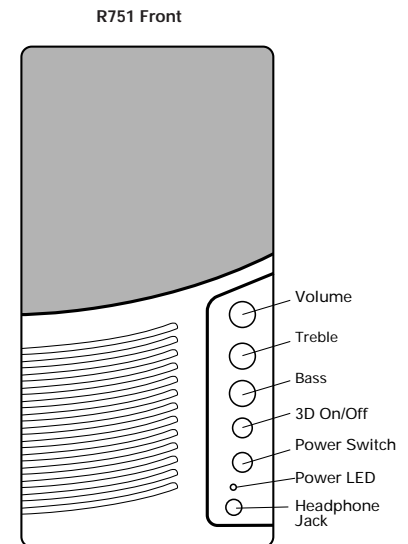

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Personal PA<sup>®</sup> FM Monitor Receiver, Model PPA R751

## Bid Specs:

The PPA R751 is a wideband single channel tabletop receiver/speaker with extra slave speaker. It shall be compatible with all Williams Sound Corp. wideband FM Transmitters. The PPA R751 is field tunable (72 MHz to 76 MHz FM), 75 KHz deviation and 75 mS de-emphasis. It shall have a max output of 20W RMS. It shall be housed in a putty colored plastic case measuring 4.3" W x 8.9" H x 5.1" D. The slave speaker shall be the same dimensions and color. The front of the speaker shall have rotary volume, treble and bass controls, 3D push button ON/OFF (boosts high frequency response), pushbutton power switch, power LED and 3.5 mm stereo headphone jack. The rear of the receiver shall have a 120 VAC-power cord, speaker cord for the slave speaker connect, F-connector for antenna and tuning coil access. A 39" telescopic antenna shall be supplied with the receiver. The receiver shall be covered by a five-year parts and labor warranty (90-day on cords, antenna and other accessories). This receiver shall be the Williams Sound Corp. model PPA R751.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Personal PA<sup>®</sup> FM Monitor Receiver, Model PPA R751

## Contact:

### United States and Mexico

Williams Sound Corp.  
10321 W. 70th Street  
Eden Prairie, MN 55344-3446  
Ph: 800-328-6190 / 952-943-2252 / FAX: 952-943-2174  
Web: [www.williamssound.com](http://www.williamssound.com)  
Email: [info@williamssound.com](mailto:info@williamssound.com)

### Canada

Thorvin Electronics  
2861 Sherwood Heights Dr. Units 36-37  
Oakville, ON L6J-7K1 Canada  
Ph: 800-323-6634 / 905-829-3040 / FAX: 905-829-4196  
Web: [www.thorvinelectronics.com](http://www.thorvinelectronics.com)

### South America

DPTech  
SIA Trecho 3/4 Lote 335 2°. Andar  
71200-030 Brasília, DF  
BRAZIL  
Ph: (5561) 361-1384  
Fax: (5561) 361-0948  
Web: [www.dpotech.com.br](http://www.dpotech.com.br)  
Email: [ws@dpotech.com.br](mailto:ws@dpotech.com.br)

### Europe and Asia

International Sales Department  
Williams Sound Corp.  
10321 W. 70th Street  
Eden Prairie, MN 55344 USA  
Phone: +1 651 493 2578 or +1 952 943 2252  
Fax: +1 952 943 2174  
Email: [doreni@williamssound.com](mailto:doreni@williamssound.com)  
Web: [www.williamssound.com](http://www.williamssound.com)

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>