


# Installing the Reflector, LNBF, & Feed Arm

Note that the reflector, LNBF, and feed arm are packaged separately as SKA-733.

1. Press and hold "POWER" for two seconds to turn on the interface box. Wait until the interface box finishes "connecting to antenna." The TRAV'LER® antenna may enter the search routine after ten seconds. **Pay attention to the pinch points as the antenna raises!**
2. Wait until the antenna has at least raised to a position in which the lift arms are perpendicular to the roof. Then, press "POWER" and "SELECT" at the same time. The antenna should stop moving.
3. Unplug the interface box.
4. Insert the two longer screws into the top two holes in the front of the reflector.
5. Slide a wedge-shaped clamp onto each screw sticking out the back of the reflector.
6. Thread a nut onto each screw; make sure the nut is tight to keep the clamp from falling.

7. Align the two anchor posts on the back of the reflector with the two notches in the skew plate (see fig. 1). Then, set the reflector on the skew plate; the reflector should be positioned with the LNBF arm at the bottom of the plate. Carefully use the clamps on the back of the reflector to hold the reflector in place (see fig. 2A); make sure that the thicker part of the clamp is to the outside of the reflector.

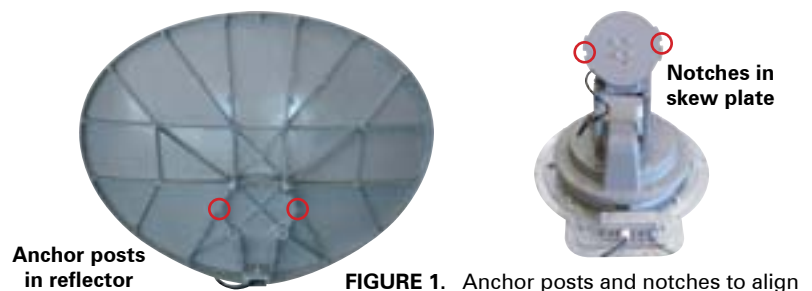

8. Once the top screws and clamps are in place, install the lower screws and clamps.
9. With the bracket mounted securely, connect the four coax cables to the mount (see fig. 2B).
10. Locate the cable tie on the coax cables that you just connected to the mount. Place the p-clamp on the cables so that it is just below this cable tie. If the cable tie is missing, install the clamp 14" from the end of the connectors.
11. Carefully screw this clamp to the front of the lift arm using the provided  $\frac{5}{16}$ " screw (see fig. 2C). Warning: Be careful not to strip out the hole for the  $\frac{5}{16}$ " screw when you replace the clamp holding the coax cables to the arm. Do not use a power tool. Do not overtighten this screw.

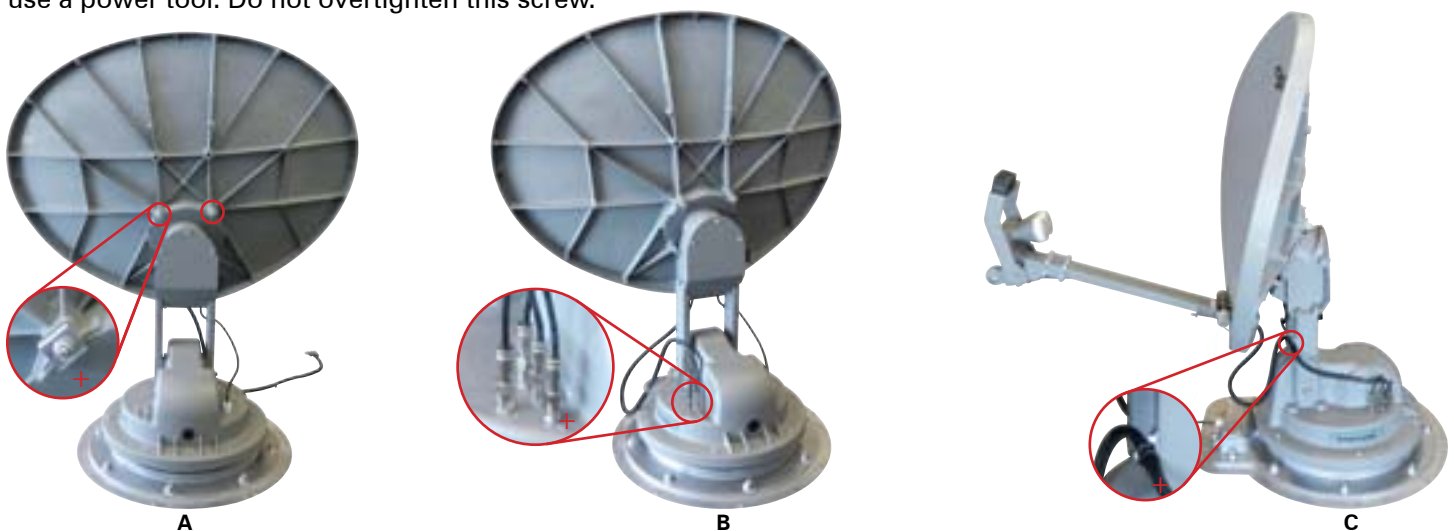


FIGURE 2. Installing reflector, LNBF, and feed arm. A, Reflector held on skew plate with clamps. B, Coax cables connected. C, P-clamp on lift arm.

12. Plug in the interface box.
13. Press and hold "POWER" for two seconds to turn on the interface box. Press the Power button again to stow the antenna.

**WINEGARD MOBILE PRODUCTS LIMITED WARRANTY  
(2 YEARS PARTS; 1 YEAR LABOR)**

Winegard Company warrants this product against defects in materials or workmanship for a period of two (2) years from the date of original purchase. During year one (1) of such warranty, Winegard Company will also pay authorized labor costs to an authorized Winegard dealer to repair or replace defective products. No warranty claim will be honored unless at the time the claim is made, Customer presents proof of purchase to an authorized Winegard dealer (to locate the nearest authorized Winegard dealer, contact Winegard Company, 3000 Kirkwood Street, Burlington, Iowa 52601, Telephone 800-288-8094 or visit [www.winegard.com](http://www.winegard.com)). Customer must provide proof of purchase with a dated sales receipt for the Winegard product to verify the product is under warranty. If the date of purchase cannot be verified, the warranty period shall be considered to begin thirty (30) days after the date of manufacture.

If a defect in material or workmanship is discovered, Customer may take the product to an authorized Winegard dealer for service. Customer must provide proof of purchase to verify the product is under warranty. If the product is brought to an authorized Winegard dealer for service prior to expiration of year one (1) of the warranty period and a defect in material or workmanship is verified by Winegard Technical Services, Winegard Company will cover the Winegard dealer's labor charges for warranty service. The Winegard dealer must contact Winegard Technical Services in advance for pre-approval of the service. Approval of the service is at the sole discretion of Winegard Company.

Alternatively, Customer may ship the product prepaid to Winegard Technical Services (located at 3111 Kirkwood Street, Burlington, Iowa 52601, Telephone 800-788-4417). Customer must return the product along with a brief description of the problem and provide Winegard Technical Services with Customer's name, address, and phone number. Customer must also provide proof of purchase to verify the product is under warranty. If the product is returned before the expiration of the warranty period, Winegard Company will (at its option) either repair or replace the product.

This Limited Warranty does not apply if the product has been damaged, deteriorates, malfunctions or fails from: improper installation, misuse, abuse, neglect, accident, tampering, modification of the product as originally manufactured by Winegard in any manner whatsoever, removing or defacing any serial number, usage not in accordance with product instructions or acts of nature such as damage caused by wind, lightning, ice or corrosive environments such as salt spray and acid rain. This Limited Warranty also does not apply if the product becomes unable to perform its' intended function in any way as a result of the television signal provider making any changes in technology or service.

**RETURN AUTHORIZATION POLICY**

A Return Material Authorization (RMA) is required prior to returning any product to Winegard Company or Winegard Warranty Services under this warranty policy. Please call our Technical Services Department at 800-788-4417 or send an email to [warranty@winegard.com](mailto:warranty@winegard.com) to obtain the RMA number. Please furnish the date of purchase when requesting an RMA number. Enclose the product in a prepaid package and write the RMA number in large, clear letters on the outside of the package. To avoid confusion or misunderstanding, a shipment(s) without an RMA number(s) or an unauthorized return(s) will be refused and returned to Customer freight collect.

WINEGARD COMPANY DOES NOT ASSUME ANY LIABILITIES FOR ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, MADE BY ANY OTHER PERSON.

ALL OTHER WARRANTIES WHETHER EXPRESS, IMPLIED OR STATUTORY INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE LIMITED TO THE TWO YEAR PERIOD OF THIS WARRANTY.

In states that do not allow limitations on implied warranties, or the exclusion of limitation of incidental or consequential damages, the above limitations or exclusions do not apply.

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion of limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives Customer specific legal rights. Customer may also have other rights that may vary from state to state.

**SATELLITE RECEIVER WARRANTY:**  
See manufacturer's limited warranty policy.

WS-MOBWARREV2  
Rev. 1/10

Winegard Company • 3000 Kirkwood Street • Burlington, IA 52601 • 1-800-288-8094 • Fax 319-754-0787 • [www.winegard.com](http://www.winegard.com)  
Printed in U.S.A. ©2012 Winegard Company Rev1 6/13 2452259

Winegard and TRAV'LER are registered trademarks of Winegard Company.

**Disclaimer:** Although every effort has been made to ensure that the information in this manual is correct and complete, no company shall be held liable for any errors or omissions in this manual. Information provided in this manual was accurate at time of printing.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>