



ATLONA
Connecting technology to your world

Wall Plate Multimedia CAT5 Extender AT-AV-SR, AT-COMP-SR, AT-COMPAD-SR

AT-AV-SR



AT-COMP-SR



AT-COMPAD-SR



User Manual

Toll free: 1-877-536-3976
Local: 1-408-962-0515



www.atlona.com

TABLE OF CONTENTS

1. Introduction	2
2. Features	2
3. Specifications	3
4. Panel View	4
5. RJ-45 Jack Pin Define	4
6. Connection and Installation	5
7. Safety Information	6
8. Warranty	7
9. Atlona Product Registration	8

INTRODUCTION

The full range of wall plate CAT5 multimedia extenders is using CAT5 structuring cable for easy installation to simplify and beautify any audiovisual environment.

FEATURES

AT-AV-SR - Wall Plate Video & Stereo Audio CAT5 Extender

- Send video and stereo audio over one CAT5 UTP cable.
- Wall mountable type for a neat and cleaner installation.
- 3 x RCA female for video and stereo audio.
- Passive, No power required.
- Transmission range up to 300 meters.
- Perfect for integrated home entertainment application.

AT-COMP-SR - Wall Plate Component Video CAT5 Extender

- Send component video signals over one CAT5 UTP cable.
- 3 x RCA female to RJ45 female, green color for Y, blue color for Pb, red color for Pr.
- Wall mountable type for a neat and cleaner installation.
- Passive, No power required.
- Support up to HDTV. (480i /480p/720p/1080i)
- Transmission range up to 300 meters.
- Perfect for integrated home entertainment application.

AT-COMPAD-SR - Wall Plate Component Video & Digital Audio CAT5 Extender

- Send component video signals over digital audio one CAT5 UTP cable.
- 4 x RCA female to RJ45 female, green color for Y, blue color for Pb, red color for Pr, orange color for digital audio.
- Wall mountable type for a neat and cleaner installation.
- Passive, No power required.
- Support up to HDTV. (480i /480p/720p/1080i)
- Transmission range up to 300 meters.
- Perfect for integrated home entertainment application.



SPECIFICATIONS

SKU	AT-AV-SR
Video Input (RCA female)	1V p-p, 75 Ohms
Audio Input (RCA female)	Stereo, left and right audio
Audio Input	2V p-p
Video& Audio Output	RJ45
Bandwidth	Video: DC to 5Mhz, Audio: 50Hz to 15Khz
Distance	300 Meters
Cable	Twisted Pair CAT5,CAT5e (AWG24)
Power	X
Dimensions (W x H x D, mm)	70 x 61 x 115
Weight (g)	100
SKU	AT-COMP-SR
Video Input (RCA female) (YPbPr)	1V p-p, 75 Ohms
Video Output	RJ45
Bandwidth	Video: DC to 5Mhz
Distance	300 Meters
Cable	Twisted Pair CAT5,CAT5e (AWG24)
Dimensions (W x H x D, mm)	70 x 61 x 115
Weight (g)	100
SKU	AT-COMPAD-SR
Video Input (RCA female) (YPbPr)	1V p-p, 75 Ohms
Digital Audio	V
Video Output	RJ45
Bandwidth	Video: DC to 5Mhz
Distance	300 Meters
Cable	Twisted Pair CAT5,CAT5e (AWG24)
Dimensions (W x H x D, mm)	70 x 61 x 115
Weight (g)	100



PANEL VIEW

AT-AV-SR

AT-COMP-SR

AT-COMPAD-SR



T568A and T568B Wiring				T568B RECOMMENDED FOR ALL SOLUTIONS		Pins on plug face (socket is reversed)
Pin	T568A Pair	T568B Pair	Wire	T568A Color	T568B Color	
1	3	2	tip	white/green stripe	white/orange stripe	
2	3	2	ring	green solid	orange solid	
3	2	3	tip	white/orange stripe	white/green stripe	
4	1	1	ring	blue solid	blue solid	
5	1	1	tip	white/blue stripe	white/blue stripe	
6	2	3	ring	orange solid	green solid	
7	4	4	tip	white/brown stripe	white/brown stripe	
8	4	4	ring	brown solid	brown solid	

RJ-45 JACK PIN DEFINE

AT-AV-SR


AT-COMP-SR

RJ -45 Jack			
Pin	Color	Function	
1	W-O	Audio L+	
2	O	Audio L-	
3	W-G	Audio R+	
4	BL	X	
5	W-BL	X	
6	G	Audio R-	
7	W-BR	Video +	
8	BR	Video-	

RJ -45 Jack			
Pin	Color	Function	
1	W-O	Pr-	
2	O	Pr +	
3	W-G	Pb-	
4	BL	X	
5	W-BL	X	
6	G	Pb +	
7	W-BR	Y-	
8	BR	Y +	




AT-COMPAD-SR

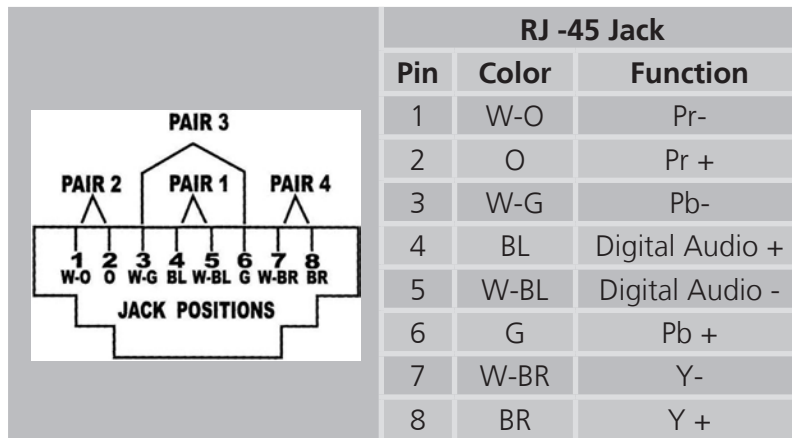


INSTALLATION


AT-AV-SR

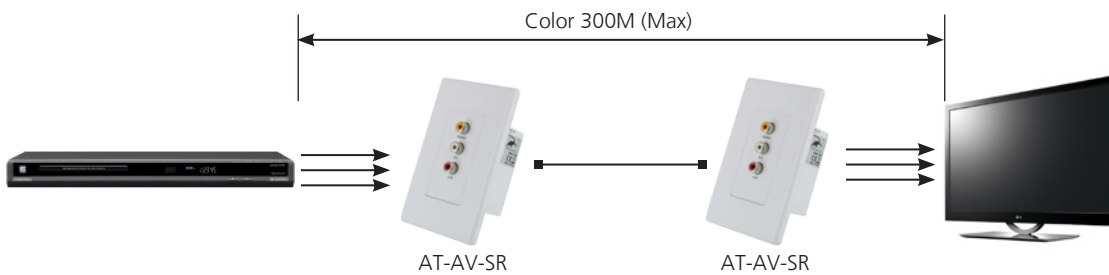

AT-COMP-SR

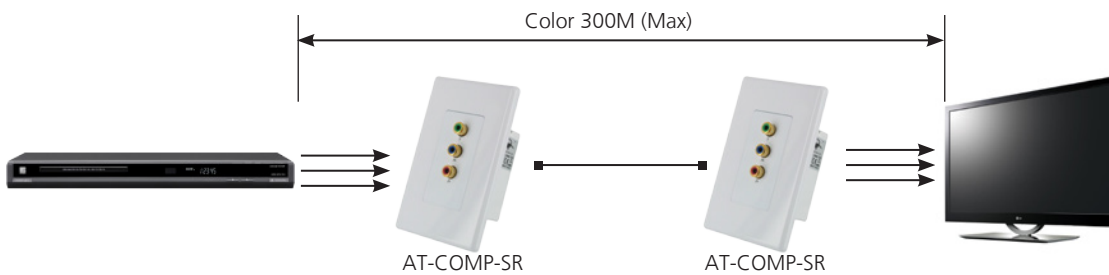

AT-COMPAD-SR

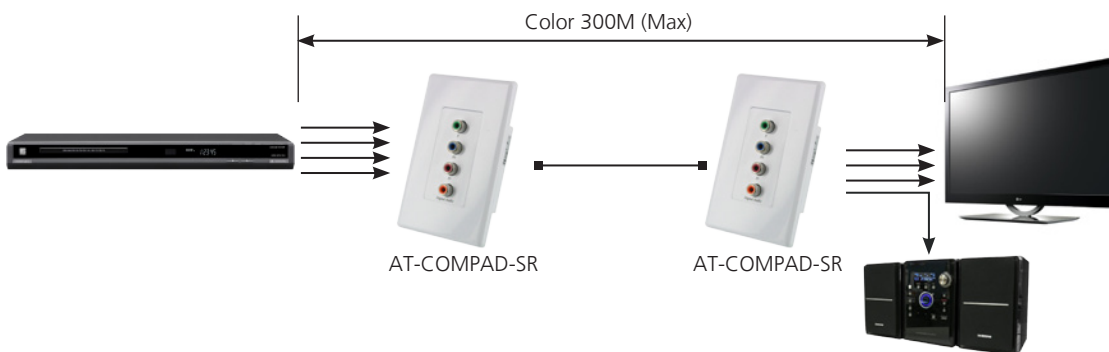

SAFETY INFORMATION

Safeguards



To reduce the risk of electric shock, do not expose this product to rain or moisture



Do not modify the wall plug. Doing so will void the warranty and safety features.



If the wall plug does not fit into your local power socket, hire an electrician to replace your obsolete socket.



This equipment should be installed near the socket outlet and the device should be easily accessible in the case it requires disconnection.

Precautions

FCC regulations state that any unauthorized changes or modifications to this equipment, not expressly approved by the manufacturer, could void the user's authority to operate this equipment.

Operate this product using only the included external power supply. Use of other power supplies could impair performance, damage the product, or cause fires.

In the event of an electrostatic discharge this device may automatically turn off. If this occurs, unplug the device and plug it back in.

Protect and route power cords so they will not be stepped on or pinched by anything placed on or against them. Be especially careful of plug-ins or cord exit points from this product.

Avoid excessive humidity, sudden temperature changes or temperature extremes.

Keep this product away from wet locations such as bathtubs, sinks, laundries, wet basements, fish tanks, and swimming pools.

Use only accessories recommended by Atlona to avoid fire, shock, or other hazards.

Unplug the product before cleaning. Use a damp cloth for cleaning and not cleaning fluid or aerosols.

Such products could enter the unit and cause damage, fire, or electric shock. Some substances may also mar the finish of the product.

Never open, remove unit panels, or make any adjustments not described in this manual. Attempting to do so could expose you to dangerous electrical shock or other hazards. It may also cause damage to your AT-AV-SR, AT-COMP-SR or AT-COMPAD-SR. Opening the product will void the warranty.

Do not attempt to service the unit. Disconnect the product and contact your authorized Atlona reseller or contact Atlona directly.

WARRANTY

Limited Warranty

Atlona Technologies warrants that (a) its products (the AT-AV-SR) will perform substantially in accordance with the accompanying written materials for a period of 3 years from the date of receipt and (b) that the product will be free from defects in materials and workmanship under normal use and service for a period of 3 years. In the event applicable law imposes any implied warranties, the implied warranty period is limited to 3 years from the date of receipt. Some jurisdictions do not allow such limitations on duration of an implied warranty, so the above limitation may not apply to customers that fall within those areas.

Customer Remedies

Atlona Technologies' and its suppliers' entire liability and Customer's exclusive remedy shall be, at Atlona Technologies' decision, either return of the price paid for the product, repair, or replacement of the product that does not meet this Limited Warranty and which is returned to Atlona Technologies with a copy of the Customer's receipt. This Limited Warranty is void if failure of the product has resulted from accident, abuse, misapplication, or natural occurrence. In example but not limited to: power surges (electrical storms, local power outage), dropping the product (or items on the product), contact with fluids, and physical misconduct (i.e. kicking or punching). Any replacement product will be warranted for the remainder of the original warranty period.

No other warranties

To the maximum extent permitted by applicable law, Atlona Technologies and its suppliers disclaim all other warranties, either expressed or implied, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose, with regard to the product and any related written materials. This Limited Warranty gives customer specific legal rights. Customers may have other rights depending on the jurisdiction.

No liability for damages

To the maximum extent permitted by applicable law, in no event shall Atlona Technologies or its suppliers be liable for any damages arising out of the use of or inability to use this product, even if Atlona Technologies has been advised of the possibility of such damages. Such damages include but are not limited to: special, incidental, consequential, or indirect damages for personal injury, loss of business profits, business interruption, loss of business information, or any other pecuniary loss.

Atlona Technologies' and its suppliers' entire liability under any provision of this agreement shall be limited to the amount actually paid by you for the product. Some Jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damage. The above limitations may not apply to you in such jurisdictional cases.

ATLONA PRODUCT REGISTRATION

Thank you for purchasing this Atlona product. - We hope you enjoy it and will take an extra few moments to register your new purchase.

Registration creates an ownership record if your product is lost or stolen and helps ensure you'll receive notification of performance issues and firmware updates.

At Atlona, we respect and protect your privacy, assuring you that your registration information is completely secure. Atlona product registration is completely voluntary and failure to register will not diminish your limited warranty rights.

To register go to: **<http://www.atlona.com/registration>**

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>