

VR5320R
VR5330R



WARNING: TO PREVENT FIRE OR ELECTRICAL SHOCK HAZARD, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.

Some of the following information may not apply to your particular product; however, as with any electronic product, precautions should be observed during handling and use.

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.
- Clean only with dry cloth.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Only use attachments/accessories specified by the manufacturer.
- Refer all servicing to qualified service personnel.

service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

ADDITIONAL SAFETY INFORMATION:

- Apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.
- Do not attempt to disassemble the cabinet.
- This product does not contain customer serviceable components.
- The marking information is located at the bottom of apparatus.

Important battery precautions

- Any battery may present a risk of fire, explosion, or chemical burn if abused. Do not try to charge a battery that is not intended to be recharged, do not incinerate, and do not puncture.
- Non-rechargeable batteries, such as alkaline batteries, may leak if left in your product for a long period of time. Remove the batteries from the product if you are not going to use it for a month or more.
- If your product uses more than one battery, do not mix types and make sure they are inserted correctly. Mixing types or inserting incorrectly may cause them to leak.
- Discard any leaky or deformed battery immediately. They may cause skin burns or other personal injury.
- Please help to protect the environment by recycling or disposing of batteries according to federal, state, and local regulations.

WARNING: The battery (battery or batteries or battery pack) shall not be exposed to excessive heat such as sunshine, fire or the like.

Ecology
Help protect the environment - we recommend that you dispose of used batteries by putting them into specially designed receptacles.

Precautions for the unit

- Do not use the unit immediately after transportation from a cold place to a warm place; condensation problems may result.
- Do not store the unit near fire, places with high temperature or in direct sunlight. Exposure to direct sunlight or extreme heat (such as inside a parked car) may cause damage or malfunction.
- Do not expose to rain or moisture.
- Clean the unit with a soft cloth or a damp chamois leather. Never use solvents.
- The unit must only be opened by qualified personnel.

Headset safety
To use a headset safely, please keep the following in mind:

- Do not play your headset at a high volume. Hearing experts advise against continuous extended play.
- If you experience ringing in your ears, turn down the volume or stop using the headset.
- Do not use a headset while driving a motorized vehicle or riding a bike. It may cause a traffic hazard and is illegal in many areas.
- Even if your headset is an open-air type designed to let you hear outside sounds, don't turn up the volume so high that can't hear sounds around you.

FCC Information
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by Audiovox could void the user's authority to operate the equipment.

Manufacturer/Responsible Party
Audiovox Accessories Corporation
111 Congressional Blvd., Suite 350
Carmel, IN 46032

1-317-810-4880 (No technical / product support is available via this number. This phone number is for regulatory matters only.)

Visit
www.rcaaudiovideo.com
for technical support

FC RCA VR5320R
FC RCA VR5330R

This Class B digital apparatus complies with Canadian ICES-003.
Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Service information
This product should be serviced only by those specially trained in appropriate servicing techniques. For instructions on how to obtain service, refer to the warranty included in this user manual.

For your records
In the event that service should be required, you may need the model number and the serial number. In the space below, record the date and place of purchase and the serial number.
Model No.:
Date of Purchase:
Place of Purchase:
Serial No.:

Power Supply 2 x "AAA"
ESD **Warning:** In case of malfunction due to electrostatic discharge just reset the product (disconnect and reconnect of the power source may be required) to resume normal operation.

ENF
It is important to read this instruction prior to using your new product for the first time. Es importante leer este manual antes de usar por vez primera su equipo.

Before you begin

Unpacking your player
You should have the following:

- One voice recorder
- One user manual
- One quick start guide
- One carrying case (for VR5330R only)
- Two AAA size batteries (For VR5330R only)

Turn off the player first before replacing batteries. If power interruption exceeds 20 seconds, date and time have to be set again.

Auto power shut down
The player will be automatically turned off if left idle for three minutes.

Using earphones and external microphone

- When earphones are connected, sound output from speaker will be muted.
- When external microphone is connected, no recording can be made from built-in microphone.

Installing batteries
This player can be operated by 2 "AAA" batteries (included).


- Slide the battery compartment door to open.
- Insert the two supplied "AAA" batteries with polarities matching indications.
- Replace the battery compartment door.

Refer to the battery level indicator on display for battery's level. Replace with new batteries when the indicator is empty.

Player on/off
Press **ON** to turn on the player. Press **OFF** to turn off the player.


Keys lock
To avoid accidental key selection, slide the key lock selector toward the lock icon (L) to lock the keys. Reverse the step to unlock them.

General controls

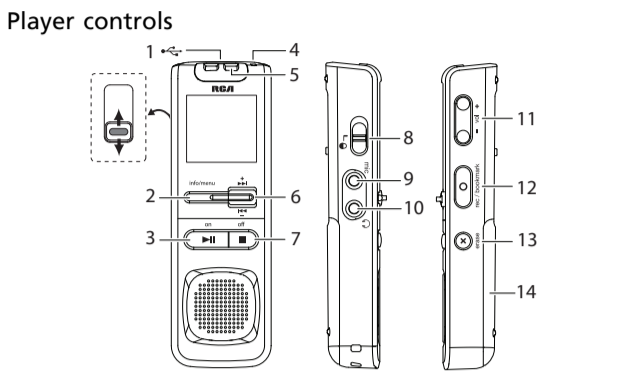

1. USB connector - Press the button on the back and then slide to extend or retract the connector.
2. **info/memo** - Press and hold to access the player menu.
3. Press repeatedly to show information of current file.
4. **ON** - Press the button to turn player on, start/pause playback.
5. Recording indicator.
6. + **1/4** / - **3/4** - Skips / searches backward or forward, selects / browses in the player menu.
7. **OFF** - Turns off player, stops playback or recording.
8. Key lock selector
9. External microphone jack
10. External earphones jack
11. + **Vol** - Adjusts volume, selects / browses in the player menu.
12. **REC** / **bookmark** - Starts and pauses recording, inserts bookmarks
13. **x**, **erase** - Erases files, bookmarks or format memory.
14. Battery compartment door

Display

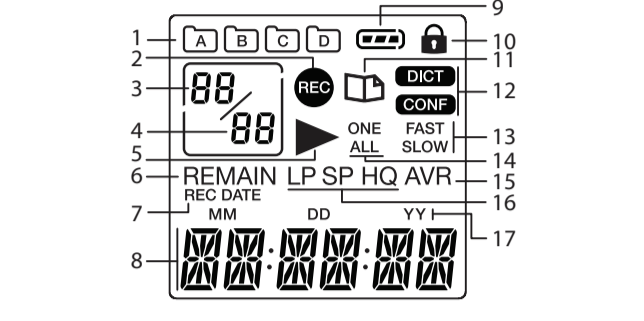

1. Folder (A/B/C/D)
2. Recording in progress
3. File selected
4. Total number of files in a folder
5. Playback in progress
6. Remaining time for recording
7. Recording date
8. Area for displaying messages (refer to the next section)
9. Battery level indicator
10. Key lock function activated
11. Bookmarks
12. Recording conditions
13. Playback speed
14. Playback mode: play one or play all
15. Automatic voice recording activated
16. Recording quality
17. Month (MM), Day (DD) and Year (YY)

Display messages

- The messages show at the bottom of the display during operation. Refer to the below for their meanings:
- 12 HOUR** 12 hour time display mode
 - 24 HOUR** 24 hour time display mode
 - ADD BK** Insert bookmark
 - APPEND** Appendix (Adding Appendix)
 - BATTLO** Batteries are weak
 - CUTE** Cut End (Cutting)
 - DEL 01** Delete the current file
 - DEL AL** Delete all files in a folder
 - DEL BK** Delete all bookmarks in the current file
 - FORMAT** Format the memory
 - MEMRY FULL** Memory full
 - INSERT** Insertion (Inserting New Segments)
 - LOCKED** Key locked
 - NO BK MK** No bookmark created in the current file
 - NO TONE** No beeping sound (Setting Beep Sound)
 - OFF** Off (Automatic Voice Recording)
 - ON** On (Automatic Voice Recording)
 - PAUSE** Playback or recording is paused
 - PCLINK** Player is connected to the computer
 - SEN HI** Sensitivity Level (AVR)
 - SPEED** Speed of playback
 - BEEPING** Beeping sound on (Setting Beep Sound)
 - VOL 15** Volume (Setting Volume)
 - WAIT** Memory rearrangement/System is busy

Basic operations

Selecting folders and files
To select folders:

1. Press and hold **info/memo** for about 2 seconds and then release the button. The first menu item **FOLDER** flashes on the display.
2. Press **1/4** or **VOL** +/- to select a specific folder (A/B/C/D).
3. Press **ON**.

5. Press and hold **1/4** or **3/4** to make quick search within a file.
- Quick search skips by second within the first minute of a recording. After that, the search skips by minute. To resume searching by second, release the button once and then press and hold **1/4** or **3/4** again.
6. Press **1/4** or **3/4** once to skip one file forward or backward.
7. Press **ON** to stop playback.

To select files:

1. Select the folder you need.
2. Press **1/4** or **3/4** to select the file you want.
3. If the file you want is in the current folder, you can press **1/4** or **3/4** to select it directly in both stop and play modes.

To display file information:
Press **info/memo** repeatedly to show various information of the current file:


- Current clock time
- Record date of current file
- Record time of current file
- Bookmark (if available) of current location
- Remaining recording time
- Elapsed play time (during playback)
- Playback mode (one/all)
- Tone (on/off)
- Year

To play back recorded files:

1. Select a folder and a file.
2. Press **ON** to start playback.
3. Press **1/4** to pause playback, press again to resume.
4. You can press **Vol +/-** to adjust listening volume.

Player menu

To access the player menu:
Press and hold **info/memo** for about 2 seconds and then release the button. The first menu item **FOLDER** flashes on the display.



To change settings in the menu:

1. In the player menu, press **info/memo** repeatedly to view the following menu items:

- Folder (A/B/C/D)
- Record conditions (DICT/CONF)
- Record quality (LP/SP/HQ)
- AVR (on/off)
- Playback speed (FAST/SLOW)
- Playback mode (one/all)
- Tone (on/off)
- Year

Recording

Setting recording mode
Manual Recording

1. While playback is stopped, select a destination folder (A/B/C/D) (refer to "Basic operations").
2. Press **REC** to start recording. (recording time will be displayed once you press the button)
3. To pause recording, press **ON** once, press again to resume recording.
4. To stop recording, press **OFF**.

AVR (Automatic Voice Recording)
This feature allows the player to sense sound and to record only when you are speaking into the microphone. When you stop for about three seconds, recording will pause and then start again automatically when you resume dictation.

1. While playback is stopped, select a destination folder (A/B/C/D) (refer to "Basic operations").
2. Press and hold **info/memo** for about 2 seconds and then release the button. The first

Setting recording quality

To select among the recording qualities (default is SP):

Definition:

- LP (Long Play)** - allows for about 400 (VR5320R) / 800 (VR5330R) hours recording. Recording format: .voc
- SP (Standard Play)** - allows for about 70 (VR5320R) / 140 (VR5330R) hours recording. Recording format: .voc
- HQ (High Quality)** - allows for about 10 (VR5320R) / 70 (VR5330R) hours recording. Recording format: .wav

Setting recording condition

To select between two recording conditions (default is DICT):

Definition:

- CONF (Conference)** - in a more open area and recording source is far from the player.
- DICT (Dictation)** - in a more enclosed area and recording source is close to the player.

1. Press and hold **info/memo** for about 2 seconds and then release the button. The first menu item **FOLDER** flashes on the display.
2. Press **info/memo** repeatedly until **DICT** or **CONF** flashes on the display.
3. Press **1/4** or **3/4** to select between **DICT** and **CONF**.
4. Press **ON** to exit the player menu.

Erasing files and bookmarks

Erasing mode
To erase files or bookmarks, wait until the REC icon is stopped:

1. Press **x** once.
2. Press **1/4** or **3/4** to select one of the erasing options:

- **DEL 01** - Delete the current file (DEL 01)
- **DEL AL** - Delete all files in the current folder (DEL AL)
- **FORMAT** - Format the memory of the player (FORMAT) (Caution! All data inside the memory will be erased)
- **DEL BK** - Delete all bookmarks in the current file (DEL BK)

3. With one of the above options selected, press and hold **x** for about 3 seconds to confirm your selection and start the deletion.

- File numbers that come after erased one will be moved forward by one automatically.
- Press **ON** to cancel erasing all files. The undeleted files are saved automatically.
- Formatting the internal memory may be required when:
 1. The flash memory becomes unstable after performing many times on file creation and deletion.
 2. To ensure the file system compatibility (i.e. file system FAT32 for application).
- You may also format the player when connected to a PC by right-clicking on the player's drive name or letter and select "Format" from the menu. Make sure you select FAT or FAT32 as the file system.

Editing

CAUTION
The edit function does not operate when battery power is too low.

- Make sure **PLAY ALL** files is not selected. Inserting new segments, adding appendix and cutting cannot be performed when **PLAY ALL** files is selected.
- After editing a message, **WAIT** appears. Otherwise, **WAIT** disappears. However, the memory which is rearranging could not be read or released until the player is formatted.


Editing mode
To insert bookmarks, new segments or appendix to a recorded file:

1. Select the desired file and start playback.
2. Press **REC** to enter editing mode. Playback is paused.
3. Press **1/4** or **3/4** to select one of the editing options:

Bookmark

To create bookmarks:

1. While playback is stopped, select a destination folder (A/B/C/D) (refer to "Basic operations").
2. Press **REC** to start recording. (recording time will be displayed once you press the button)
3. To pause recording, press **ON** once, press again to resume recording.
4. To stop recording, press **OFF**.

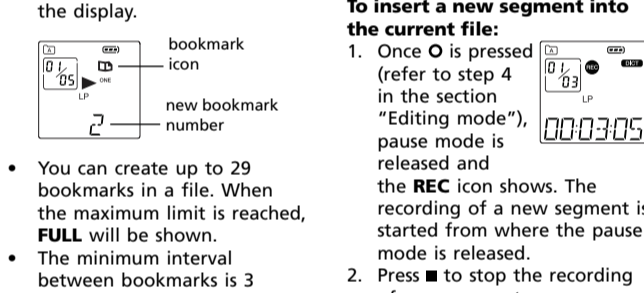

- You can create up to 29 bookmarks in a file. When the maximum limit is reached, **FULL** will be shown.
- The minimum interval between bookmarks is 3 seconds.
- To skip to a bookmark anytime during playback:**
 1. During playback, press **1/4** or **3/4** to go to the bookmark (if available).
 2. Press **ON** again to go to the next bookmark.

Append

To insert an appendix at the end of the current file:

1. Once **ON** is pressed (refer to step 4 in the section "Editing mode"), the REC icon shows and recording of appendix is started.
2. Press **ON** to stop the recording of the appendix.

Insert
To insert a new segment into the current file:

1. Once **ON** is pressed (refer to step 4 in the section "Editing mode"), pause mode is released and the REC icon shows. The recording of a new segment is started from where the pause mode is released.
2. Press **ON** to stop the recording of new segment.
3. Do not power off the player if **WAIT** appears on the display.

Advanced operations

To delete all bookmarks created in the current file:
Refer to section "Erasing files and bookmarks".

To delete all bookmarks in the current file:

1. Once **ON** is pressed (refer to step 4 in the section "Editing mode"), the REC icon shows and recording of appendix is started.
2. Press **ON** to stop the recording of the appendix.

To erase unwanted parts from the current file:

1. Start playback of the desired file.
2. Press **x** to mark the start of the unwanted part, **CUTE** shows on display.
3. Press **x** to mark the end of the unwanted part, **CUTE** shows on display.
4. Press **x** again to confirm cutting within 3 seconds. Otherwise, the cutting operation will be canceled.
5. You may also press **ON** to cancel the cutting operation.
6. Do not power off the player if **WAIT** appears on the display.

Advanced operations

Tones
To activate or deactivate the beep sound when any key is pressed (except during playback and recording):

1. Press and hold **info/memo** for about 2 seconds and then release the button. The first menu item **FOLDER** flashes on the display.
2. Press **info/memo** repeatedly until **NOTONE** shows on display.
3. Press **1/4** or **3/4** to select **ON** or **OFF**.
4. Press **ON** to exit the player menu.

Speed
To adjust the playback speed:

1. Press and hold **info/memo** for about 2 seconds and then release the button. The first menu item **FOLDER** flashes on the display.
2. Press **info/memo** repeatedly until **SPEED** shows on display.
3. Press **1/4** or **3/4** to select among **FAST**, **SLOW** and **normal** speed (normal speed).
4. Press **ON** to exit the player menu.

Connecting to computer

Computer system requirements

- PC with Windows® 7, Windows® Vista or Windows® XP (Service Pack 1 or higher) or Windows® 2000 (Service Pack 3 or higher).
- Mac OS is NOT supported.
- 20MB free hard disk space for software
- USB port 1.1 or 2.0
- Installed sound card

Installing Digital Voice Manager

1. Connect the player with the computer as instructed in the previous section.
2. Open My Computer and double-click the player's drive icon. Double-click **rcadvm** setup.exe to start the Digital Voice Manager installation.
3. The RCA Detective application is installed with the Digital Voice Manager application and will open the Digital Voice Manager application automatically when you connect the player to your computer.

Using Digital Voice Manager

Launching the software

1. To launch the software, click **Start**, select **All Programs**, select **RCA Digital Voice Recorder**, then select **RCA Digital Voice Manager**.
2. All the drives in the computer except the removable Digital Voice Recorder are shown in the top while the removable Digital Voice Recorder is shown in the bottom.

Playback and editing operations

1. To organize your files, click the corresponding buttons to cut, delete, copy and paste a file (or by drag and drop).
2. To play the recorded files, highlight the file and click the **PLAY/PAUSE** button on the left of the toolbar.

Creating and playing self-executable file

You can play the created file independently without the Digital Voice Management software.

1. Highlight a recorded file, click **Save**.
2. Select the destination folder from the pop up window and click **Save**.
3. Go to the destination folder and double-click the created file.
4. Click **Play** to start playback. Adjust the volume on the right.

Creating wave file
Self-executable file may be blocked by some e-mail filters. When recordings are made in **LP** or **SP** Quality, you may select to create wave file if you want to send your recorded messages by e-mail.

1. Highlight a recorded file, click **Save**.
2. Select the destination folder from the pop up window and click **Save**.
3. The created file could be found in the destination folder.

Using Digital Voice Manager

Transfer files with Digital Voice Manager
Your player is associated with a drive letter. You can drag the voice files you want to transfer to your player to the A/B/C/D folder in the drive.

Using your player as a file storage device
The player can function as a detachable data storage device. You can take along your favorite pictures and documents wherever you go. Simply cut-and-paste or drag-and-drop files to or from it via USB connection, the player will appear as a removable drive in Windows

Disconnecting from computer

After you have copied files to or from the player, you can disconnect the player from the computer.

1. Click the **UNPLUG** icon from the System Tray and select **Unplug or Eject hardware**. Select the drive corresponding to your player.
2. The **Stop a Hardware player** screen will appear. Select the player to be stopped again for confirmation and click **OK**.
3. Now you can disconnect the player from the computer.

Troubleshooting tips

Player doesn't turn on

- Check that batteries are properly inserted and not exhausted.
- Make sure battery compartment door is properly closed.
- Make sure LOCK function is not activated.

Display keeps flashing when player is off

- You may not have set the time. Refer to section "Setting date and time".

Cannot record

- This player does not record mp3 format.
- Make sure LOCK function is not activated.
- You may have recorded is not full.
- You have recorded 99 files in one folder. Try record in a new folder.
- You may have formatted the player with incorrect file system (e.g. NTFS or MAC format). Refer to section "Erasing files and bookmarks" and format the player again.

Incorrect recording date and time during playback

- You may have not set the date and time before recording. Refer to section "Setting date and time".

Cannot erase recorded file(s)

- Make sure you follow each step under section "Erasing files and bookmarks" carefully.

Cannot stop recording when AVR ON

- If AVR ON sensitivity is set to HIGH, recording may not be stopped in noisy environment. Try setting the sensitivity to LOW.

Cannot keep the saved setting

- If the batteries are removed, saved settings may be removed.

Cannot open recorded files in the computer.

- Make sure you use the provided DVM software to open the files.
- To download the software, go to www.rcaaudiovideo.com
- On a Mac computer, only .WAV file on the player can be played directly via application such as Quicktime.

Cannot perform playback

- This player does not play mp3 format.
- Make sure you have selected folder with recorded messages.
- Make sure LOCK function is not activated.
- Make sure the file is playable, which must be of 8-bit PCM or Designated RCA format. Other

Cannot activate the battery after pressing on keys

- Remove the batteries to reset the player.

Recordable time becomes shorter

- You may have set the recording quality to "High Quality", refer to section "Setting Recording Quality".
- Delete the Digital Voice Manager setup software from the player to free up more memory space.

Cannot perform playback

- This player does not play mp3 format.
- Make sure you have selected folder with recorded messages.
- Make sure LOCK function is not activated.
- Make sure the file is playable, which must be of 8-bit PCM or Designated RCA format. Other

You can also drag the voice files you want to transfer from the A/B/C/D folder in the drive to your computer.

Do not rename, delete and transfer (drag-and-drop) voice files to your player directly in Windows Explorer. Use the Digital Voice Manager to rename, delete and transfer voice files.


Help - For detailed explanation on using Digital Voice Manager, click the Help icon on the toolbar



Mac OS version (i.e. Mac OS X version 10.4.11 or later) can support the mass storage mode only for listening audio files (recorded in HQ mode under "WAV" format) through the Mac audio program (eg. Quicktime).

Connecting to computer
Connect the player before launching the Digital Voice Manager.


1. Extend the USB connector on the player and connect it to your computer's USB port.
2. **PCLINK** shows on the player's display. The player appears as a removable drive in your computer.



When the player is in Menu mode, during playback or recording, a connection between the player and the computer will not be established. Quit the above modes before connecting to the computer.

- Data transfer is possible even if no batteries are installed in the player.
- Do not disconnect the USB connection during files transfer.

VR5320R
VR5330R

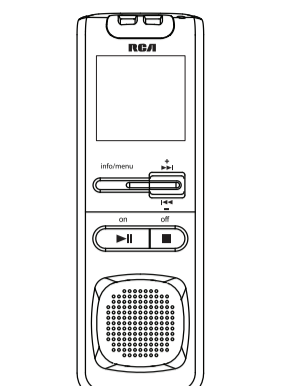

ENVE

It is important to read this instruction prior to using your new product for the first time. Es importante leer este manual antes de usar por vez primera su equipo.

Antes de empezar

Desempaque de su unidad. Usted recibirá todo lo siguiente:

- una grabadora de voz;
- un manual del usuario
- una guía de inicio rápido
- Un estuche para transporte
- un manual de instrucciones para la grabadora de voz
- Dos baterías tamaño AAA (solo para VR5330R)

Instalación de baterías. Este reproductor puede funcionar con 2 baterías "AAA" (incluida).

1. Deslice la puerta del compartimiento de las baterías para abrir.
2. Coloque 2 pilas "AAA" de forma que las polaridades coincidan con las indicaciones.
3. Vuelva a colocar la puerta del compartimiento de pilas.

Para conocer el nivel de la batería cheque el indicador del nivel de batería en la pantalla. Cuando este indicador se muestre reemplazelas con baterías nuevas.

Apague el reproductor antes de reemplazar las baterías. Si la interrupción de energía excede los 20 segundos, la fecha y hora tienen que ser establecidos nuevamente.

Ajuste del día y la hora

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.

Presione **Info/Menu** para confirmar y salir de configuración.




ADVERTENCIA: PARA PREVENIR FUEGO O LLUVIA O HUMEDAD, NO EXPOSER EL PRODUCTO A LLUVIA O HUMEDAD.

Alguna de la siguiente información quizá no se aplique a su producto en particular. Sin embargo, como con cualquier producto electrónico, se deben tomar precauciones durante su manejo y uso.

- Lea estas instrucciones.
- Conserve estas instrucciones.
- Tome en cuenta todas las advertencias.
- Siga todas las instrucciones.
- No use este aparato cerca del agua.
- Limpie solamente con un paño seco.
- No instale cerca de fuentes de calor tales como radiadores, registros de calor, estufas, u otros aparatos (incluyendo amplificadores) que produzcan calor.
- Use solamente accesorios/

Controles generales

Controles del reproductor



1. Conector USB – presione el botón en la parte posterior y luego deslice para extender o retraer el conector.
2. **Info/Menu** – presione y mantenga sostenido para tener acceso al menú del reproductor. Presione repetidamente para mostrar información del archivo actual.
3. on **PAUSE** – presione el botón para pausar la grabación, inserta marcadores.
4. Indicador de grabación
5. Micrófono interno
6. **Fast** – saltar/abscisa hacia atrás o hacia adelante, selecciona/navega en el menú

aditamentos especificados por el fabricante.

- Refiera todo el servicio a personal de servicio calificado. El servicio es requerido cuando el aparato ha sido dañado de alguna forma, tal como daño a la clavija o al cable de corriente, cuando se ha derramado líquido o han caído objetos dentro del aparato, el aparato ha sido expuesto a lluvia o humedad, no funciona normalmente, o ha sido tirado.

INFORMACION ADICIONAL DE SEGURIDAD

- El aparato no debe quedar expuesto a gotes o salpicaduras de líquidos, y, por lo tanto, no se deben colocar sobre aparatos u objetos que contengan líquidos, como por ejemplo vasos.
- No intente desensamblar el gabinete. Este producto no contiene componentes que requieran servicio por parte del cliente.
- La información de señalamiento está ubicada en la parte inferior del aparato.

Precauciones importantes para la batería

- Cualquier batería puede presentar un riesgo de fuego, explosión o quemadura química si es mal tratada. NO intente de cargar una batería que no esté diseñada para ser recargada, no incinere y no perforo.
- Baterías no recargables, tales como las baterías alcalinas, pueden tener fugas si son dejadas en su producto por un largo periodo de tiempo. Retire las baterías del producto si usted no lo va a usar por un mes o más.
- Si su producto usa más de una batería, no mezcle tipos y asegúrese de que estén correctamente insertados. Mezclar tipos de baterías o insertarlas incorrectamente puede causar que tengan fugas.
- Deseche inmediatamente cualquier batería con fugas o deformada. Ellas pueden causar quemaduras de la piel u otra lesión personal.

Medio ambiente

Ayude a cuidar el medio ambiente. Le recomendamos que deseche las baterías gastadas en los contenedores especialmente diseñados para ello.

Precauciones para la unidad

- No utilice la unidad inmediatamente después de llevarla de un lugar frío a un lugar caliente puesto que podría producirse algún problema de condensación.
- Ne rangez pas l'appareil près du feu, dans un endroit très chaud ou soleil. L'exposition au soleil ou à une chaleur intense (p. ex. à l'intérieur d'une voiture stationnée) peut causer des

IMPORTANTE INSTRUCCIONES DE SEGURIDAD

FAVOR DE GUARDAR ESTO PARA UNA REFERENCIA FUTURA

- Por favor ayude a proteger el ambiente reciclando o eliminando las baterías de conformidad con las regulaciones federales, estatales y locales.
- ADVERTENCIA: La batería (batería o baterías o paquete de baterías) no deberá ser expuesta a calor excesivo tal como el sol, fuego o similares.

Seguridad de Audífonos

Para usar el audífono con seguridad, por favor tome en cuenta lo siguiente:

- No utilice su nuevo audífono a un alto volumen. Los expertos en el oído aconsejan que la reproducción de sonido extendida continua.
- Si usted experimenta zumbido en sus oídos, baje el volumen o deje de utilizar el audífono.
- No use audífonos mientras conduce un vehículo motorizado o monta en bicicleta. Puede causar un riesgo de tráfico y es ilegal en muchas áreas.
- Aun si su audífono es del tipo para uso al aire libre diseñado para permitirle escuchar sonidos exteriores, no suba

Información FCC

Nota: Se probó este equipo y podemos afirmar que cumple con las restricciones establecidas para un dispositivo digital Clase B, de acuerdo con la Sección 15 de la Regulación de FCC. Estas restricciones fueron diseñadas para brindar una protección razonable frente a la interferencia perjudicial en una instalación residencial. Este equipo genera, usa y puede irradiar energía de radiofrecuencia, y si no está instalado o no se lo utiliza de acuerdo con las instrucciones, puede ocasionar interferencias perjudiciales para las comunicaciones de radio.

Sin embargo, no existe ninguna garantía de que no se vaya a producir una interferencia en una instalación particular. Si este equipo produce una interferencia perjudicial con la recepción de la radio o la televisión, lo cual podría determinarse apagando y encendiendo el equipo, se le pide al usuario que intente corregir la interferencia siguiendo una o

varias de las siguientes medidas.

- Reoriento o reubique la antena receptora
- Aumente la separación entre el equipo y el receptor
- Conecte el equipo a un toma corriente diferente al que conecta el receptor
- Consulte al distribuidor o a un técnico especializado en radio / TV para solicitar ayuda

Los cambios o modificaciones que no sean expresamente aprobados por Audiovox podrían invalidar la autoridad del usuario para hacer funcionar el aparato.

Fabricante / Parte responsable Audiovox Accessories Corporation 111 Congressional Blvd., Suite 350 Carmel, IN 46032

1-317-810-4880 (Por favor tome nota que este número de teléfono es sólo para asuntos regulatorios. En este número no hay disponibilidad de soporte de producto o técnico.)

Visite www.rcaudiovideo.com para soporte de técnico

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Ajuste del día y la hora

Con el ajuste del día y la hora usted puede siempre leer en la pantalla la fecha y la hora de grabación de sus mensajes grabados. La grabación normal es todavía posible sin el ajuste. Sin embargo, ninguna fecha y hora de grabación correcta pueden ser referidos a sus mensajes grabados.

Para establecer la fecha y hora:

1. Presione **Info/Menu** para encender el reproductor.
2. En modo detener, presione y sostenga **Info/Menu** por unos 2 segundos y luego presione **Info/Menu** repetidamente hasta que el primer elemento del menú **FOLDER** parpadee en la pantalla.
3. Presione **Info/Menu** repetidamente hasta que **YY** parpadee en la pantalla.
4. Presione **Info/Menu** o **Vol +/-** para ajustar el valor (año predeterminado: 2009) y luego presione **Info/Menu** para confirmar.



Información Técnica Este producto solo debería ser atendido por personal especializado y entrenado con las técnicas de mantenimiento apropiadas. En la garantía, incluida en esta guía, encontrará instrucciones sobre la forma de obtener servicio técnico.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Puntualización ESD: En caso de mal funcionamiento debido a descargas electro estáticas simplemente reinicie el producto (puede ser necesario desconectar la fuente de alimentación para volver a un funcionamiento normal.

Por Favor, Tome Nota En caso de que necesite asistencia técnica, deberá consignar tanto el número de modelo como el número de serie. Rellene en los espacios que hay más abajo los datos del lugar de compra y número de serie.

Modelo No. Fecha de Compra Lugar de Compra No. de Serie

Suministro de energía (potencia de plia) "AAA" x 2

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>