


Technical Specifications


Version 1.0 December 2001



Transducer type:	condenser, 1" single diaphragm
Operating principle:	pressure gradient
Polar pattern:	cardioid
Connection:	gold-plated balanced XLR connector
Open circuit voltage at 1 kHz:	-34 +/- 2 dBV (0 dBV = 1 V/Pa)
Open circuit sensitivity:	20 mV/Pa
Frequency range:	20 Hz - 20 kHz
Level attenuation:	-10 dB (switchable)
Low-Cut filter:	6 dB/Octave at 75 Hz (switchable)
Max. SPL (1% THD @ 1 kHz):	138 dB (0 dB), 148 dB (-10 dB)
Equivalent SPL (IEC 268-4):	13 dB-A
Signal-to-noise ratio re 1 Pa:	81 dB A-weighted
Nominal impedance:	50 Ω
Load impedance:	> 1 kΩ
Supply voltage:	+48 V
Supply current:	3 mA
Dimensions:	∅: 58 mm, length: 174 mm
Weight:	0,461 kg

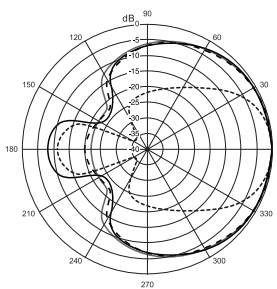

Polar pattern

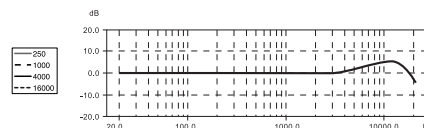

Frequency response

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

The information contained in this sheet is subject to change without notice. No part of this sheet may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER is a registered trademark. ALL RIGHTS RESERVED.
 © 2001 BEHRINGER Spezielle Studiotechnik GmbH.
 BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany
 Tel. +49 (0) 21 54 / 92 06-0, Fax +49 (0) 21 54 / 92 06-30



www.behringer.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>