

THE FCC WANTS YOU TO KNOW

DESIGN COMPLIANCE Your telephone is designed to comply with FCC Rules and Regulations, Part 68. It can be connected to the telephone network as FCC-registered terminal equipment. The registration number is printed on the label on the bottom of your telephone.

NOTIFICATION TO THE TELEPHONE COMPANY As a customer of the local telephone company, you must, if they ask, tell them before connecting your telephone to the telephone company lines. The telephone company may need the FCC registration number and the ringer equivalence of the telephone. This information is printed on a label on the bottom of your telephone.

RINGER EQUIVALENCE The ringer equivalence indicates the amount of power that your telephone draws from the telephone company line during ringing. The number is printed on the label on the bottom of your telephone.

If you have more than one telephone (or other terminal device) connected to the telephone company line, you should total the ringer equivalence numbers (REN's), and be sure that the total is not more than five. Your telephones may not ring if the total is more than five. Also, in some rural locations, your telephone may not ring if the REN total is more than three.

RESTRICTIONS You must not connect your telephone to coin-operated lines or party lines.

INTERFERENCE POTENTIAL If your telephone has a push-button dial, it may generate radio frequency energy. If not properly used, it may interfere with radio and television reception. If the telephone does cause interference with reception, move the radio or television to another electrical circuit or another location. If necessary, you may need to seek advice from an experienced technician.

INSTALLATION This model telephone must be connected to the telephone company lines through a modular jack. The required USOC for the modular jack is RJ11C for desk mounting and RJ11W for wall mounting. The USOC number is printed on the label on the bottom of your telephone.

TYPE OF DIALING If your telephone has a push-button TONE dial, you must have TONE service from your telephone company to use your telephone for dialing. If your telephone has a rotary dial, you are not required to have TONE service. Note that you will usually be charged extra for TONE service.

HEARING-AID COMPATIBILITY The handset on your telephone will work with magnetically-coupled hearing aids. You can use a hearing aid equipped with a T (Telephone) switch.

IN CASE OF TROUBLE If your telephone should cause problems on the telephone line, the telephone company can temporarily disconnect your service. The telephone company must then notify and allow you to correct the problem.

The telephone company may from time to time change its lines or equipment. They must notify you if planned changes will affect your telephone service, to allow you to take steps to prevent interruptions.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

SAVE THESE INSTRUCTIONS

THANK YOU FOR PURCHASING THIS TELEPHONE

Your new telephone was made by people who take a great deal of PRIDE in producing quality products to assure you years of trouble-free service.

We want you to know all about your new telephone, how to install it, the features it provides, and the services you can expect from its use. We have included this information in your Owner's Instruction Manual.

PLEASE READ BEFORE INSTALLING AND USING YOUR NEW TELEPHONE.

IMPORTANT SAFETY INSTRUCTIONS

Always follow basic safety precautions when using your telephone equipment to reduce the risk of fire, electrical shock, and injury.

1. **Read and understand all instructions** in the Owner's Instruction Manual.
2. **Read all warnings** and follow all instructions marked on the product.
3. **Unplug this product from the wall outlet before cleaning.** Use a damp cloth for cleaning. Do not use liquid or aerosol cleaners.
4. **Do not use the telephone near water.** For example, do not use near a bathtub, wash bowl, kitchen sink, laundry tub, swimming pool, or in a wet basement.
5. **Do not place this product on an unstable cart or stand.** The product may fall causing serious damage to the product.

6. **Do not place any objects on the telephone line cord.** Do not locate the telephone where the line cord will be walked on.

7. **Do not block or cover ventilation slots and openings** in the bottom of the telephone. The openings should never be blocked by placing the telephone on a bed, sofa, rug, or other similar surfaces. This telephone should never be placed near or over a radiator or heat register. This telephone should never be placed in a built-in installation unless proper ventilation is provided.

8. **Never spill liquid on the telephone or push objects of any kind through ventilation slots.** Liquid or objects may touch dangerous voltage points or short out parts that could result in a risk of fire or electrical shock.

9. **Do not disassemble this product.** Opening or removing covers may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electrical shock when the product is subsequently used.


10. **Avoid using a telephone during a local thunderstorm.** There may be a remote risk of electrical shock from lightning.

11. **Do not use a telephone in the vicinity of a gas leak** to report the leak, or otherwise.

12. **Unplug the telephone from the wall outlet and refer servicing to qualified service personnel** under the following conditions:

- When the line cord is frayed or plugs damaged.
- If liquid has been spilled into the telephone.
- If the telephone has been exposed to rain or water.
- If the telephone does not operate properly by following the operating instructions.
- If the telephone has been dropped or the housing damaged.
- If the telephone exhibits distinct change in performance.

OWNER'S INSTRUCTION MANUAL

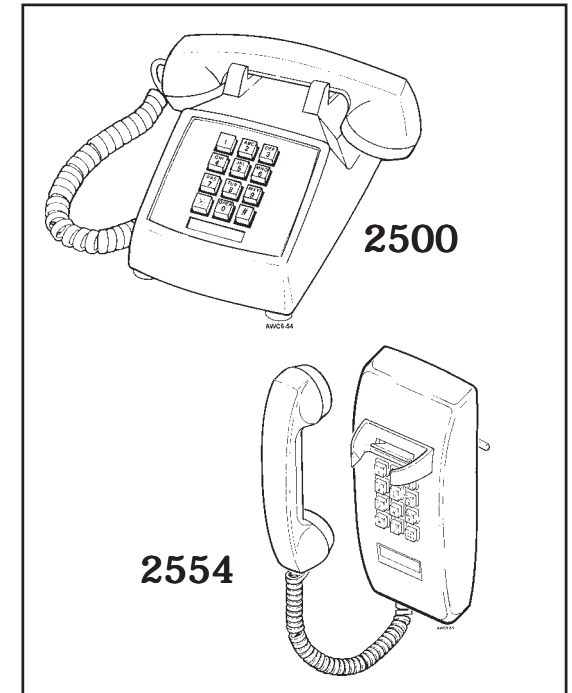

2500XX-VBA-20MT

2554XX-VBA-20MT

***XX** is color code

CORTELCO VALUE LINE

INSTALLING YOUR TELEPHONE MODULAR JACKS

To install your telephone, you must have a modular wall jack at the desired location. If your telephone line does not have a modular jack, you must have one installed.


DANGER: To reduce the risk of electrical shock and personal injury, observe the following when installing station wiring:

1. Never install telephone wiring during a lightning storm.
2. Never install telephone jacks in wet locations unless the jack is specifically designed for wet locations.
3. Never touch uninsulated telephone wires or terminals unless the telephone line has been disconnected at the network interface.
4. Use caution when installing or modifying telephone lines.

Various types of modular wall jacks are shown below. The USOC RJ11C modular wall jack is for desk telephones and the USOC RJ11W modular wall jack is for modular wall telephones.

The USOC RJ11W modular wall jack must be in the correct mounting position before mounting a modular wall telephone. Check


to make sure it is in the position shown.



DESK INSTALLATION

To install a desk telephone, use the long modular line cord supplied with your telephone. Plug one end of the line cord into the connector on the back of your telephone and the opposite end into the modular wall jack. Your telephone is ready to use.


To disconnect your telephone, press the spring clip on the line cord plug and pull out.



WALL INSTALLATION

To install a modular wall telephone, refer to the diagram to the right.

- Fit the plug (1) on the back of the telephone into the jack (2).
- Align slotted holes (3) on the back of the telephone over the mounting studs (4).



- Gently pull down on the telephone until it locks in place.

BEFORE USING YOUR TELEPHONE

This telephone includes a Handset with Receiver Volume Control that complies with FCC Part 68 requirements mandated by the Hearing Aid Compatibility Act of 1988. The Volume Control is a small switch found on the inside of the Handset handle. The switch may be conveniently operated while holding the handset.

Pushing the switch toward the Receiver (upper) end of the Handset will increase the loudness from the Receiver.

Pushing the switch toward the Microphone (lower) end of the Handset will decrease the loudness from the Receiver.

The Volume Control will not disable the Receiver. The minimum loudness setting of the Volume control will usually produce a comfortable listening level for persons with no hearing impairment.

Your telephone has a TONE-PULSE switch. Set the switch to match the dialing service from the telephone company.

- If you have pulse service, set the Tone-Pulse switch to PULSE.
- If you set the switch for TONE service, you must have TONE service or you cannot dial.

- If you set the switch for PULSE service and you have TONE service, you can dial numbers, but you cannot use touch-tone services.
- If you have PULSE service you can set the switch to PULSE and dial a touch-tone service, and then set the switch to TONE to use the service. BE SURE TO SET THE SWITCH TO PULSE WHEN YOU FINISH THE CALL.

TELEPHONE SERVICE PROBLEMS

If you have any problems with your telephone service, determine if the problem is with your telephone or the telephone company lines BEFORE CALLING THE TELEPHONE COMPANY. Please be aware that they may charge you for a service call if the problem is caused by your telephone.

NO DIAL TONE

- Unplug your telephone from the wall jack. Plug a substitute telephone that is known to work properly into the same wall jack.
- If the problem persists when using the substitute telephone, notify the telephone company.
- If the substitute telephone works properly, you must have your telephone repaired before reconnecting it to the wall jack.

DIAL TONE BUT NO RINGING

- Set the RINGER VOLUME CONTROL to HIGH and have someone on another line call you. Before answering the call, set the RINGER VOLUME CONTROL to the desired volume.

DIAL TONE BUT NO DIALING

- Set the TONE/PULSE switch. You cannot dial out in TONE position if you have Rotary Dial Service.
- For Rotary Dial Service, set the switch to PULSE position.
- For Tone Dial Service, set the switch to TONE position.
- Try both positions if you are not sure.

REPAIR OF YOUR TELEPHONE

DO NOT ATTEMPT TO REPAIR THE TELEPHONE

YOURSELF. Telephones manufactured by CORTELCO VALUE LINE must be returned to us for repair.

You can return your telephone to CORTELCO VALUE LINE for repair or replacement in accordance with our LIMITED WARRANTY.

DATE-OF-PURCHASE CORTELCO VALUE LINE warrants telephones against defects in material and workmanship in accordance with our LIMITED WARRANTY. If your telephone is returned for repair, include a copy of your sales receipt containing the date-of-purchase. DO NOT INCLUDE THE ORIGINAL SALES RECEIPT.

If date-of-purchase is not included, the factory date printed on the label on the bottom of your telephone will be used as the date-of-purchase. The factory date allows six months for distribution and sale of the telephone.

If you return your telephone for repair, the warranty period is not extended. The original date-of-purchase continues to apply to your warranty.

OUT-OF-WARRANTY REPAIR We will repair this telephone for a nominal fee after the LIMITED WARRANTY has expired if you send it to us in a complete and undamaged condition. The repaired telephone will be shipped to you C.O.D., freight collect.

FOREIGN ATTACHMENTS Remove all attached devices, such as adapter plugs or long cords, from your telephone before returning for repair. We do not assume responsibility for repair or return of attachments. Check our LIMITED WARRANTY.

RETURN-FOR-REPAIR PACKAGING If you are returning a telephone to us for repair, package it carefully, preferably in the original carton. Be sure to include your return address, a copy of the sales receipt showing date-of-purchase, and a note describing the problem you have with your telephone. Shipping must be prepaid. If the telephone is in warranty, it will be repaired or replaced, at our option, at no cost to you, and it will be returned shipping prepaid.

Ship telephones (shipping prepaid) to:

CORTELCO VALUE LINE REPAIR CENTER
1703 SAWYER ROAD
CORINTH, MS 38834

MAINTENANCE INFORMATION

Treat your telephone with care for trouble-free performance. Avoid dropping the handset. Carefully place the handset on-hook after use.

Clean your telephone with a damp cloth. Stains may be removed with a mild soap. Do not use liquid or aerosol detergents or cleaning agents.

LIMITED WARRANTY

If this telephone was purchased by you new in the U.S. or Puerto Rico, CORTELCO VALUE LINE warrants the telephone against defects in material and workmanship for a period of two (2) years* from the date of original purchase. This warranty is in lieu of all other express warranties. During the warranty period, CORTELCO VALUE LINE agrees to repair or, at its option, replace the defective telephone, or any part of it without charge for parts or labor. This is your exclusive remedy. This warranty does not cover damage resulting from accident, misuse, abuse, improper installation or operation, lack of reasonable care, the affixing of any attachment not provided by CORTELCO VALUE LINE with the telephone and loss of parts. The warranty is voided in the event any unauthorized person alters or repairs the telephone.

Telephone companies use different types of equipment and offer various types of services to customers. CORTELCO VALUE LINE does not warrant that this telephone is compatible with the type of equipment of any particular phone company or the services provided by it.

CORTELCO VALUE LINE DISCLAIMS ANY IMPLIED WARRANTY, INCLUDING THE WARRANTY OF MERCHANTABILITY AND THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, AS OF THE DATE ONE YEAR FROM THE ORIGINAL PURCHASE OF THE TELEPHONE. CORTELCO VALUE LINE ASSUMES NO RESPONSIBILITY FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES OR LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE EXCLUSION AND LIMITATION MAY NOT APPLY TO YOU.

If failure occurs and your telephone is in warranty, service shall be provided by returning the telephone to CORTELCO VALUE LINE - Repair Center, 1703 Sawyer Road, Corinth, MS 38834, shipping prepaid. The telephone will be repaired or replaced if examination by us determines the telephone to be defective. Telephones received damaged as a result of shipping will require you to file a claim with the carrier.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>