

OfficePower™ 1500AVR-H0 Automatic Voltage Regulator



40 - 100
Minutes of
system runtime

CyberPower gives you lightning protection plus battery back-up in a compact space-saving design.

Includes software that saves open files and shuts off the computer automatically when power is interrupted.

AVR
AUTOMATIC VOLTAGE REGULATOR

USB & Serial
Interface Compatibility
ALL CABLES INCLUDED

PRODUCT FEATURES:

- Automatic Voltage Regulator ensures clean, consistent and computer-safe voltage levels.
- Battery Run-times up to 100 minutes
- Dual 9AH batteries for longer run-time
- All outlets are surge-protected at 1500 joules
- PowerPanelPlus Software included
- Internet / Network-Ready with Phone / Fax / Modem / DSL & Broadband Network Protection
- \$400,000 Connected Equipment Warranty
- Includes USB and serial cable for maximum connectivity



Includes
PowerPanelPlus™
Automatic Shutdown Software
(Windows NT, 98, ME & 2000 compatible)



- Saves open files, closes applications and shuts down your computer when a power outage occurs.
- Monitors input voltage, output voltage, battery capacity, load and unit temperature.
- Allows for user-defined scheduled shutdown and startup of computer system.

OfficePower™ 1500AVR-HO

Automatic Voltage Regulator



High Performance Power Protection with Automatic Voltage Regulation

CyberPower Systems' 1500AVR-HO is an ideal unit for high-end computer systems or users who need extended run-times. The dual 9AH batteries provide ample run-time for today's power-hungry processors.

The AVR feature ensures that your sensitive electronic equipment receives only clean, consistent, regulated power, reducing system "lock-ups". CyberPower backs this unit with an impressive \$400,000 connected equipment guarantee. The 1500AVR-HO sets the standard for quality, reliability and performance at a realistic price.

What is AVR?

Automatic Voltage Regulators increase low or decrease high voltage to a computer safe 110/120 volts. The 1500AVR-HO automatically provides battery backup power if the line voltage drops below 90 volts or exceeds 145 volts.

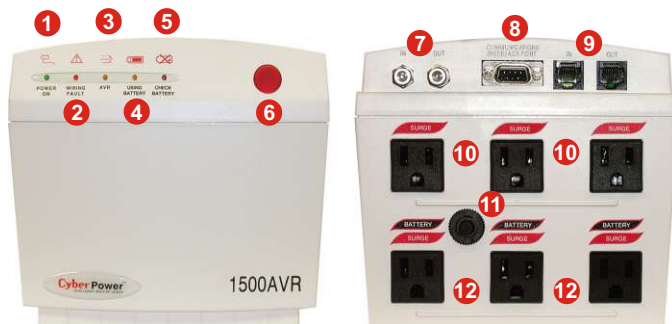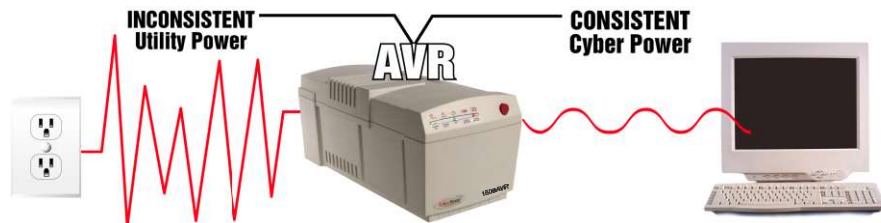

- 1 - Power On Indicator
- 2 - Electrical Wiring Fault Indicator
- 3 - Automatic Voltage Regulator
- 4 - Using Battery Indicator
- 5 - Check Battery Indicator
- 6 - Power Switch
- 7 - Coaxial cable protection
- 8 - Serial Port to PC
- 9 - Phone/Network Protection (RJ-11/RJ-45)
- 10 - Full-time Surge Protection Outlets
- 11 - Re-settable Circuit Breaker
- 12 - Battery Power Supplied Outlets

TECHNICAL SPECIFICATIONS

| | |
|-------------------------------|---|
| Model | CPS1500AVR-HO |
| VA Rating | 1500VA |
| Watts | 900W |
| Input Voltage on Utility | 85V to 150V |
| Frequency on Utility | 57Hz to 63 Hz |
| Output Voltage on Battery | 120V +/- 5% |
| Frequency on Battery | 60Hz |
| Surge Energy Capacity | 1500 Joules |
| Maximum Surge Current | 72,000 Amps |
| Overload Protection | Internal circuitry limiting. On-line circuit breaker |
| Battery Run-time | Up to 100 mins. |
| Typical Battery Recharge Time | 8 hours |
| Total number of receptacles | 3 battery / surge, 3 full-time surge-only |
| Visual Indicators | Power On/Off, Automatic Voltage Regulator, Using Battery, Site Wiring Fault |
| Audible Indicators | Battery on, Low battery, UPS overload |
| Warranty | Three Year Limited Warranty on UPS unit and battery |
| Conformance Approvals | UL 1778, cUL 107.1, FCC Doc Class B |
| Included Software | PowerPanelPlus™ Power Management Software |
| Connected Equip. Guarantee | \$400,000 |

ORDERING INFORMATION

| | |
|--------------------------------|-------------------------|
| Part Number | CPS1500AVR-HO |
| Sell Unit Dims. (L" x W" x H") | 15.87" x 9.25" x 9.12" |
| Sell Unit Net Weight | 30 LBS. |
| Master Carton Quantity | 2 UNITS |
| Master Dims. (L" x W" x H") | 18.33" x 16.18" x 9.37" |
| Master Weight | 62 LBS. |
| UPC Number | 6 49532 20015 3 |

CyberPower™

5555 12th Ave. East, Suite 110, Shakopee, MN 55379
Phone: 877.297.6937 Fax: 952.403.0009

For more information, visit CyberPower's Web Site at www.cyberpowersystems.com or call 1-877-CY-POWER

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>