




EIKI 5030A

KEY FEATURES

- Powerful room filling sound.
- Maximum strength, minimum weight. Eiki's incredibly durable high-impact ABS body is built to endure years of punishment.
- Comfortable, full-size controls: Play, record, fast rewind, fast forward/cue, pause and stop/eject keys.
- Braille raised symbols on keyboard for the vision impaired.
- Side-mounted listening center jacks allow private listening for up to 7 people with headsets.
- Built-in electret condenser microphone with automatic and manual recording level controls.
- Automatic Tape Stop and power shut-off in all modes.
- Standard 1/4" monaural audio jacks for headset and speaker output.
- 2X digital tape counter with reset buttons.
- Full Range Volume and Tone Controls.
- Pop-Up Cassette Lid automatically lifts cassette up for quick tape changes.
- Dependable Cassette Tape transport mechanism.
- Auxiliary input jack.

AUDIO TAPE RECORDER /PLAYER

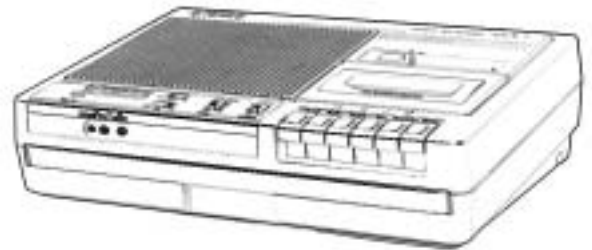

5030A

OPTIONAL ACCESSORIES

- Standard headset
- Remote control microphone

Specifications

Frequency Response	125Hz to 8KHz	Auxiliary Input Jack	1/8" (3.5 mm) x 1
Wow & Flutter	0.17%	Remote Pause	1/10" (2.46 mm) x 1
Tape Speed	1 7/8 inches per second	Headset Jacks	1/4" x 7
Tape Capacity	C30, C-60, C-90	Audio Output: Amplifier	10 Watts RMS (D.H.T. 10%)
Rewind Time	C-60 1 minute, 50 seconds	Signal To Noise Ratio	45dB
Heads Record,	Record, playback and erase	Audio: Output Speakers	10 x 13cm (5" round x 1)
Battery or AC Operation	AC only	Speaker Jacks	1/4", 4 Ohm x 1
Tape Format	Cassette, monaural	Dimensions (H x W x D)	330 x 241 x 101 mm
Tape Counter	Resetttable 3-digit (ANSI 2x standard)	Weight	2.78 kg (without batteries)
Operating Keys	Record, play, review, cue/fast forward, pause, stop, eject	Packaged Weight	3.63 kg (without batteries)
Record Level Indicators	ALC LED meter	Power Requirements	AC only, 120 Volts, 60 Hz
Record Level Control	ALC on-off switch	Power Consumption	18 W approximately
Microphone	Electret condenser, omni directional monaural type	Safety Compliance	cUL Listed
Remote Microphone Jack	1/8" (3.5 mm) x 1	Warranty - Unit 1-	Year limited qarranty from date of original purchase for parts and labour.

Specifications subject to change without notice. ©2002 Eiki International, Inc. Issued June 12, 2001.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
 In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com
 Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>