



Air Conditioning & Heating

PRODUCT SPECIFICATIONS



GSAS SERIES

WHOLE-HOUSE, HIGH-EFFICIENCY ELECTRONIC AIR CLEANER

The Goodman® high-efficiency electronic air cleaner is designed to remove air contaminants down to 0.01 micron. The GSAS series helps protect and prolong the operating efficiency of the heating and cooling equipment.

Standard Features

- Pre-filters (2) constructed of aluminum mesh to prevent lint and large particles from entering the collecting cells
- Collecting cells (2) constructed of heavy-gauge aluminum for durability and ease of maintenance
- Activated carbon filters help remove unpleasant odors
- Air-proving switch cycles air cleaner on/off with system fan
- ON/OFF switch light indicates power to air cleaner
- Performance indicator light indicates high voltage to collecting cells, ensuring proper air cleaner operation
- Equipped with a variable resistor (potentiometer) to adjust high-voltage output
- Output is preset for optimum efficiency; voltage may vary in extreme conditions of dryness, humidity, or proximity to hydro towers
- Removable power box contains the ON/OFF switch, performance indicator light, safety interlock switch, high-voltage power board, and air-proving switch

Cabinet Features

- Cell guides ensure proper placement of collecting cells in cabinet
- Heavy-gauge galvanized steel resists corrosion and provides trouble-free vertical or horizontal installation
- Durable powder-coat paint finish resists corrosion




For full details on our warranties, visit www.goodmanmfg.com



SPECIFICATIONS

Model	GSAS-10	GSAS-11	GSAS-12	GSAS-18
House Size	<2,400 ft ² <222.96 m ²	<3,000 ft ² <278.70 m ²	<3,000 ft ² <278.70 m ²	>3,000 ft ² >278.70 m ²
Airflow	up to 1,200 CFM up to 2,039 m ³ /hr	up to 1,400 CFM up to 2,379 m ³ /hr	up to 1,400 CFM up to 2,379 m ³ /hr	up to 2,000 CFM up to 3,398 m ³ /hr
Duct Size	16" x 20" 40.5 x 51 cm	16" x 25" 40.5 x 63.5 cm	20" x 20" 51 x 51 cm	20" x 25" 51 x 63.5 cm
Weight	28 lbs / 12.9 kg	30 lbs / 13.5 kg	33 lbs / 15.3 kg	38 lbs / 17.5 kg
Power	120-volt 60 hz / 30 watts	120-volt 60 hz / 30 watts	120-volt 60 hz / 30 watts	120-volt 60 hz / 30 watts

DIMENSIONS

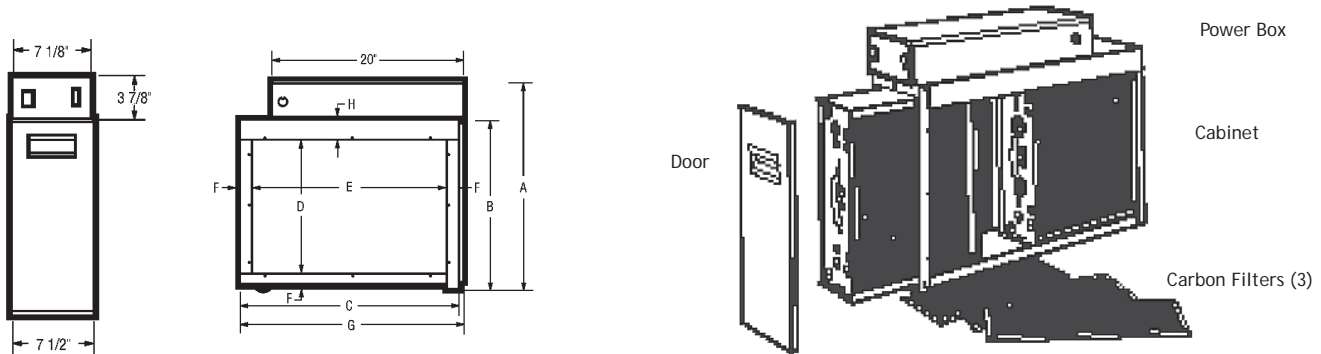

Model	Dimensions — inches / cm							
	A	B	C	D	E	F	G	H
GSAS-10ASC	21 / 53.0	17 / 43.5	23¼ / 59.0	13⅞ / 33.5	20¼ / 53.0	1¼ / 3.0	23¼ / 60.5	2⅞ / 6.0
GSAS-11ASC	21 / 53.0	17 / 43.5	26 / 66.0	13⅞ / 34.5	24 / 61.0	1 / 2.5	26½ / 67.5	2⅞ / 5.5
GSAS-12ASC	25⅞ / 66.0	22 / 56.0	21¼ / 54.0	18 / 46.0	18¼ / 47.5	1¼ / 3.0	21¼ / 55.0	2⅞ / 6.0
GSAS-18ASC	25⅞ / 66.0	22 / 56.0	26 / 66.0	18 / 46.0	23½ / 59.5	1¼ / 3.0	26½ / 67.5	2⅞ / 6.0

ACCESSORIES

Model	Replacement Filter
GSAS-10 GSAS-11	Part #1156-3
GSAS-12 GSAS-18	Part #1856-3

For the most powerful air cleaning system available, add an Amana® brand True HEPA Air Cleaner to the Amana® brand Electronic Air Cleaner.

DAX Detergent Size	Part #
32 oz (1L) Spray Bottle	#9900
1.1 gal (4L) Jug	#9901

To keep your lifetime filter system at its best, wash collecting cells and pre-filters with DAX Electronic Air Cleaner Detergent. Activated carbon filters should be replaced every 3 to 6 months. Additional activated carbon filters are available in three-packs.

For more information, call the air cleaner help line toll-free 1-800-267-8305



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>