


# UV Plus<sup>+</sup>

## A USB VGA Display Port Quick Install Guide

Supports UV 12, UV 16 and UV 19

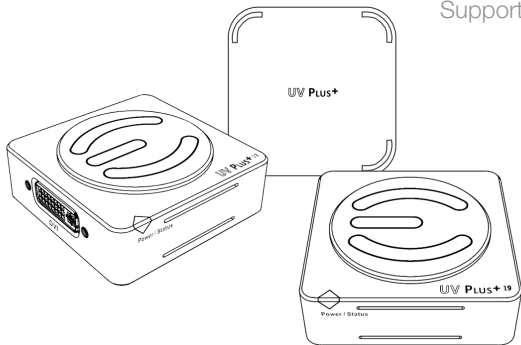

# UV PLUS+

## Introduction

EVGA's UV Plus+ gives you the ability to use multiple displays by utilizing a USB 2.0 port on your laptop or PC. Each monitor will need either a UV 12, UV 16 or UV 19. Up to 6 UV Plus+ devices can be used at the same time allowing multiple displays through CRT and LCD monitors, or a Projector. With the ability to Mirror or Extend your desktop up, down, left, or right, EVGA's UV Plus+ gives you full freedom to move about your virtual work space.

## System Requirements:

- An available USB 2.0 port
- Windows® 2000, XP 32-Bit, Vista or 7
- CD-ROM or DVD-ROM if using the provided installation CD
- 30 MB of free disk space
- 1.2 GHz or higher processor
- 512 MB of system memory (1 GB or more is recommended)


## Package Contents:

Your EVGA UV Plus+ device will have the following optional items included in this package:


- 1 x DVI to VGA Adapter
- 1 x USB Cable
- 1 x Installation CD for Drivers and Software
- 1 x Travel Case

## UVPlus+ Supports:


- Windows Aero
- 32-Bit Color Depth
- Widescreen Aspect Ratio
- Ability to Clone or Extend
- VGA, DVI, and FPI Display Connections
- High-Definition Displays



UV 12



UV 16



UV 19

## The Following Resolutions are Supported:

*Resolutions may vary depending on your displays capabilities.*

- 800x600, 1024x768, 1280x768, 1366x768, 1280x1024, 1440x900, 1400x1050


**Supported on UV 12, UV 16, and UV 19**

- 1680x1050, 1600x1200

**Supported by UV 16 and UV 19 models only**


- 1920x1200, 2048x1152

**Supported by UV 19 model only**

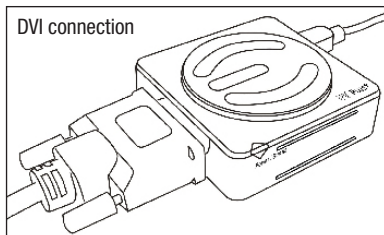

## Hardware and Driver Setup:

- 1 – Power on your Laptop or your monitor and PC to begin the installation.
- 2 – Once in Windows, install the UV Plus+ drivers from the provided installation CD. After the installation process has finished reboot your computer.
- 3 – Attach your monitor's DVI connector to UV Plus+ (a DVI to VGA connector is provided if needed)
- 4 – Plug in the provided USB cable to UV Plus+ and the other end to your Notebook or PC's USB port. The UV Plus+ software will now detect your attached display.
- 5 – Right-click the EVGA icon in the Windows System Tray to configure how the attached monitor should display.



A DVI to VGA Adapter is provided to allow a VGA connection to the UV Plus+ DVI connection. A USB Extension cable is also provided to allow for optimum placement of your UV Plus+.

## FAQ:

**Question:** Will the UV Plus+ attached monitor render full 3D hardware rendered graphics when in Mirror or Extended Modes?

**Answer:** Yes, full 3D hardware rendered graphics can be displayed while in Mirror or Extended Modes, however running in such a configuration is limited as the application in use may become slower or not as responsive.

**Question:** Discoloration and constant flickering occurs through the UV Plus+ attached monitor.

**Answer:** Check that your monitor's cable is properly attached and check for loose or faulty cables. If the problem continues, please contact EVGA Support at (888)-880-EVGA (3842)

**Question:** Why do I experience lag and delay when playing a 3D hardware accelerated game in either Mirrored or Extended mode?

**Answer:** USB 2.0 is limited to a 480Mbps transfer speed and because of this limitation only so much data can pass through at one time. This causes a delay that can both be seen and felt when playing a game when using the UV Plus+ device.

**Question:** How many monitors are supported when using UV Plus+?

**Answer:** The maximum amount of monitors supported is 6. Note that due to current driver limitations, only a maximum of 4 monitors can be used with an NVIDIA<sup>®</sup> based graphics card.

**Question:** How can I stay updated with the latest UV Plus+ software releases?

**Answer:** The UV Plus+ software that installs on to your computer has a built in Auto Update feature which will automatically check for any updates and then prompt you accordingly. You can right click the UV Plus+ icon in the Windows System Tray and select Updates to either configure how your computer updates or to manually check for an update.

**Question:** How do I uninstall UV Plus+ software?

**Answer:** In Vista/7 click Start ➔ Control Panel ➔ Uninstall a program ➔ Select EVGA UV Plus+ and select Uninstall. In XP or 2000 click Start ➔ Settings ➔ Control Panel ➔ Add or Remove Programs ➔ Select EVGA UV Plus+ and select Uninstall.

**Question:** Why does my UV Plus+ attached monitor not display anything when my computer is booting up or in a DOS based environment?

**Answer:** UV Plus+ will only activate in a Windows based environment. Signal will be passed to your UV Plus+ attached monitor when the UV Plus+ software has fully loaded as part of the Windows startup process.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>