

165 VR3

6" Polyglass woofer


- Zamak chassis
- Polyglass cone, Butyl surround
- 25mm Kapton voice-coil former



Specifications

Nominal power	75 W
Maximum power	150 W
Sensitivity	93 dB
Cone	Polyglass
Surround	Butyl
Nom. impedance	4 ohms
DC resistance	3.1 ohms
VC diameter	25 mm
VC height	13 mm
Former	Kapton
Layers	2
Wire	Copper
Inductance	0.22 mH
Xmax	3.5 mm
Magnet d x h	85 x 15 mm 3 ^{1/3} x 9/16 in
Magnet weight	750 g 1.65 lb
Flux density	0.9 T
Gap height	5 mm
Net weight	950 g 2.1 lb


Frequency response / Impedance

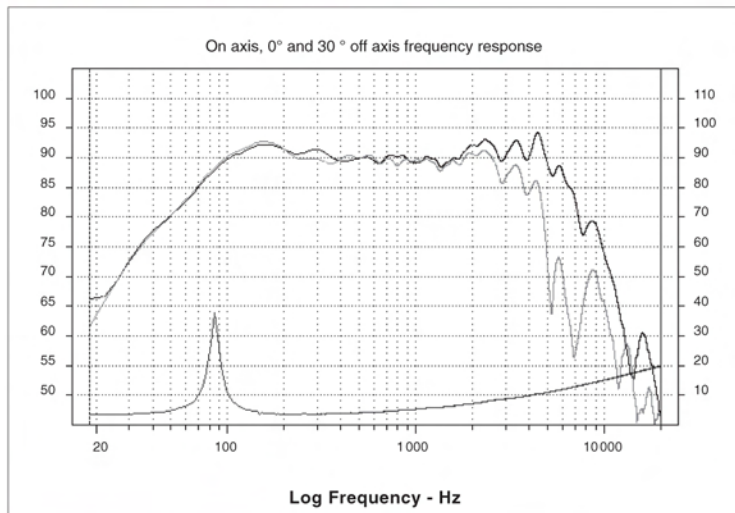

Parameters

Fs	83.24 Hz
Vas	6.85 l 0.242 Ft ³
Qts	0.830
Qes	0.900
Qms	10.720
Re	3.1 ohms
Sd	132.73 cm ² 20.57 in ²
Cas	4.88E-08 m ⁵ /N
Mas	74.92 kg/m ⁴
Ras	3655.43 ohms.ac
Cms	2.77E-04 m/N
Mms	13.20 g 0.03 lb
Rms	0.644 Kg/s
Ces	555.10 mF
Les	6.59 mH
Res	36.92 ohms
Bl	4.88 N/A
SPL	88.27 dB/W/m

Mechanical Drawing

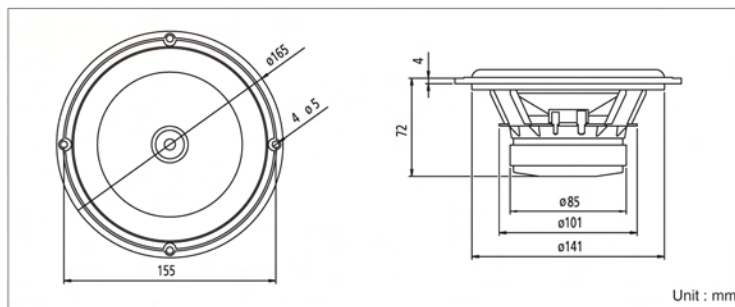

Suggested application

Load	V (l)	Fb (Hz)	F-3 (Hz)	Ql
Sealed	30	-	75	7

100 V Slim

4" Polyglass Midrange




- Zamak chassis
- Polyglass cone, Butyl surround
- Neodymium magnet



Specifications

Nominal power	50 W	
Maximum power	100 W	
Sensitivity	91 dB	
Cone	Polyglass	
Surround	Butyl	
Nom. impedance	4 ohms	
DC resistance	3.2 ohms	
VC diameter	25 mm	
VC height	8 mm	
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	0.2 mH	
Xmax	2 mm	
Magnet d x h	-	
Magnet weight	-	
Flux density	1.1 T	
Gap height	3 mm	
Net weight	350 g	0.77 lb


Frequency Response / Impedance

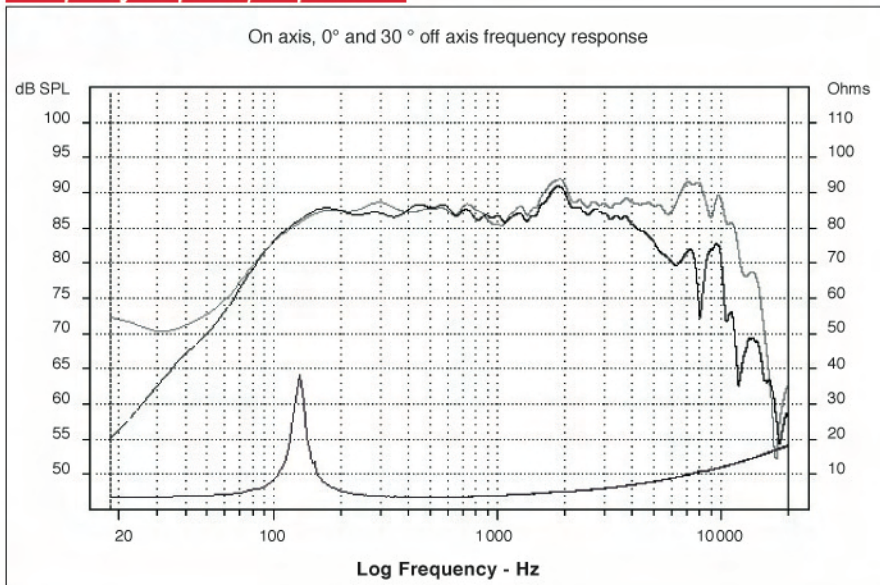

Parameters

Fs	117.66 Hz	
Vas	1.43 l	0.05 Ft ³
Qts	0.811	
Qes	0.880	
Qms	10.410	
Re	3.55 ohms	
Sd	52.81 cm ²	8.18 in ²
Cas	1.02E-08 m ⁵ /N	
Mas	179.28 kg/m ⁴	
Ras	12731.89 ohms.ac	
Cms	3.66E-04 m/N	
Mms	5.00 g	0.01 lb
Rms	0.355 Kg/s	
Ces	335.31 mF	
Les	5.46 mH	
Res	41.99 ohms	
Bl	3.86 N/A	
SPL	86.08 dB/W/m	

Mechanical Drawing

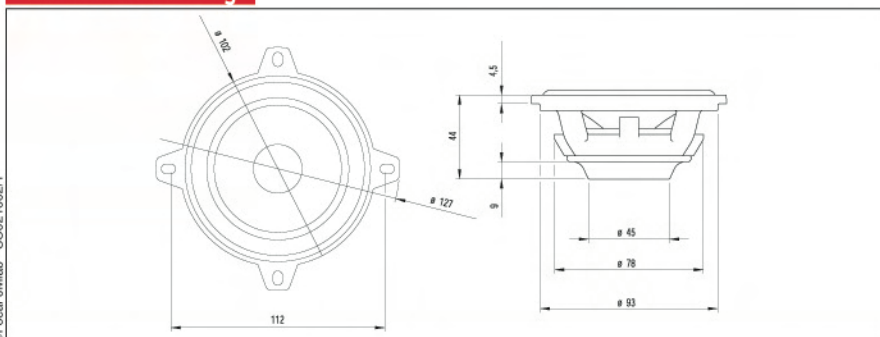

Suggested application

Load	V (l)	Fb (Hz)	F-3 (Hz)	Ql
Vented				
Sealed				

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>