

HALO®



- ARCHITECTURAL FLEXIBLE TRACK
- HALO LINEAR ARCHITECTURAL TRACK
- HALO POWER-TRAC



STASIS
PAR20, PAR30, PAR38
Incandescent



STASIS
MR16 Low Voltage

• Die cast aluminum body with double articulated support arm.

• Integral electronic transformer on 12V MR16 unit.


• Lampholder tilt and rotation can be locked in place easily with the use of a M2 allen wrench.

• Die Cast Aluminum body with threaded screw-on bezel for positive engagement.

MR16 units: Lampholder provided with cover glass (required for use with non-open fixture rated lamps). Lampholder can accommodate two pieces of media.


Dimensions

PAR20

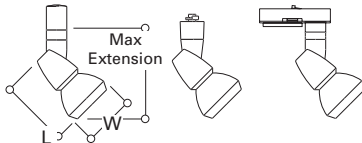


PAR20	
Length (L):	4.7" [119mm]
Width (W):	3.37" [86mm]
Max Extension:	
Halo Flexible Track	6.0" [152mm]
Halo Power-Trac	6.6" [167mm]
Halo Architectural Track	6.0" [152mm]

PAR30

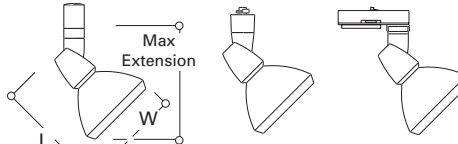


PAR30	
Length (L):	5.8" [147mm]
Width (W):	5.4" [137mm]
Max Extension:	
Halo Flexible Track	7.6" [193mm]
Halo Power-Trac	8.1" [205mm]
Halo Architectural Track	7.1" [182mm]

PAR38

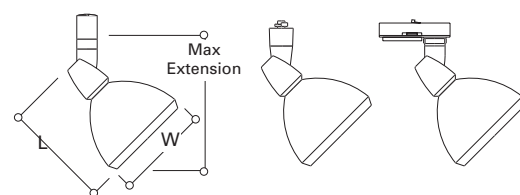

PAR30	
Length (L):	7.18" [182mm]
Width (W):	6.4" [162mm]
Max Extension:	
Halo Flexible Track	8.9" [226mm]
Halo Power-Trac	9.4" [238mm]
Halo Architectural Track	8.4" [213mm]

MR16

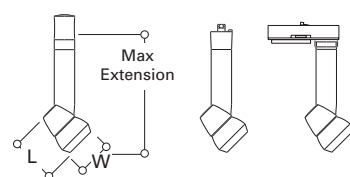

MR16	
Length (L):	3.1" [78mm]
Width (W):	W=2.5" [63mm]
Max Extension:	
Halo Flexible Track	7.7" [196mm]
Halo Power-Trac	8.2" [208mm]
Halo Architectural Track	7.2" [182mm]

Description

PAR20

Lamp: 50W PAR20
Finish: Aluminum Haze (AH)
Accessories: LM10520AH, P, MB Media Ring
Accommodates two 2 1/2" media

PAR30

Lamp: 75W PAR30
Finish: Aluminum Haze (AH)
Accessories: LM10530AH, P, MB Media Ring
Accommodates two 3 3/4" media

PAR38

Lamp: 150W PAR38
Finish: Aluminum Haze (AH)
Accessories: LM10538AH, P, MB Media Ring
Accommodates two 4 11/16" media

MR16

Lamp: 50W MR16
Finish: Aluminum Haze (AH)
Accessories: L100 series Lenses
L100MB Hex Cell Louver (50W Max)

		05				
Track LF=Flexible Track L=Halo Track LA=Halo Architectural Track Systems	Lamp Type 1=Incandescent 2=Low Voltage	Series 05=Stasis	Lamp 20=PAR20 30=PAR30 38=PAR38 16=MR16	Finish AH=Aluminum Haze P=White (L and LA only) MB=Black (L and LA only)	Voltage 277=277V (LA20516 only)	Accessories - LM10520=PAR20 Media Holder LM10530=PAR30 Media Holder LM10538=PAR38 Media Holder Accessories (MR16 units) L100 Series Lenses L100MB Hex Cell Louver (50W max.)

Electrical Quick Lock Adapter

Flexible Track Models:

Die Cast housing. Attaches electrically and mechanically anywhere along track.

Halo Power-Trac Models:

Polycarbonate housing. Attaches electrically and mechanically anywhere along track.

Halo Architectural Track Models:

Polycarbonate housing with integral fuse and on-off switch. Attaches electrically and mechanically anywhere along track.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>