

R A63s Distribution Amplifier



The ROLLS R A63s distributes a mono signal to eight outputs, or a stereo signal to four right and left outputs. The inputs and outputs may be connected balanced or unbalanced. Used in schools, churches, warehouses, and factories to name a few, the R A63s delivers clean, high powered signals to separate locations

FEATURES

- 8 channel Mono operation, or 4 channel Stereo operation
- Internal jumper configures the unit for Mono or Stereo mode
- Screw-terminal inputs and outputs
- Secure screw-driver adjustable level controls
- 20 dB Gain switch
- FR4 Double-sided epoxy circuit board
- Socketed ICs
- Made in the U.S.A.

SPECIFICATIONS

| | |
|---------------------|--|
| Input Impedance: | 100 K Ω balanced |
| Max Input Level: | +22 dBV |
| I/O Connectors: | Screw terminal; +, -, and ground |
| Output Impedance: | 50 Ω balanced |
| Max Output Level: | +24 dB |
| Max Gain: | 20 dB |
| S/N Ratio: | >90 dB |
| Frequency Response: | 10 Hz - 40 kHz, +/- 1 dB |
| THD: | <.008% |
| Power: | 120 VAC 50-60 Hz, 15VA |
| Size: | 19" x 1.75" x 6.5" (48 x 4.5 x 17 cm) |
| Weight: | 7 lbs. (3 kg) |

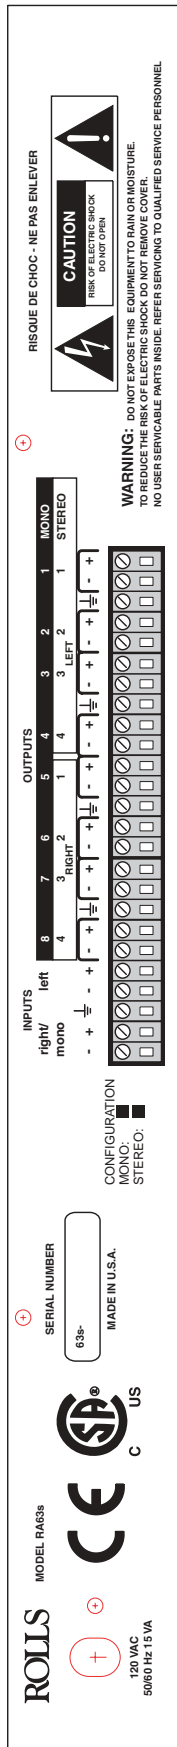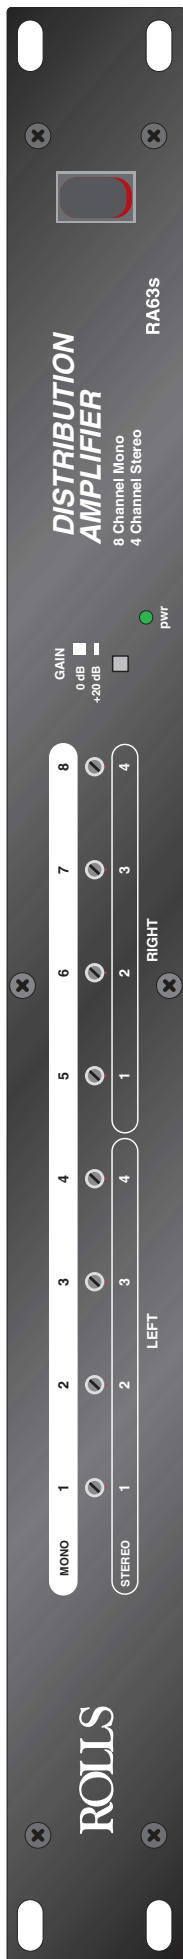

ROLLS

ROLLS Coporation
5968 South 350 West, Salt Lake City, UT, 84107
(801) 263-9053 FAX (801) 263-9068
email: info@rolls.com • web: www.rolls.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>