

SELECT[®] DAIRY BARN



Self-Cleaning Electric Water Heater

This 80-gallon electric water heater is equipped with two heating elements, with thermostats that are adjustable up to 180°F, to provide sanitizing hot water required in a dairy barn environment. It is also shipped with a base with 4" legs, to raise the water heater off the floor to simplify and maintain sanitary conditions.



Self-Cleaning Turbo Coil Dip Tube



- Designed with jet ports that direct incoming cold water to create turbulence and reduce sediment buildup in the tank
- Reduced sediment buildup helps prolong tank life and maximizes high energy-efficiency
- Made from State PEXAN™, a cross-linked polymer that can withstand long-term exposure to temperatures up to 400°F

Two 4500-Watt Heating Elements, Each with 180°F Thermostat

- Elements are available non-simultaneous or simultaneous with off-peak metering as demanded by zone requirements
- 180°F thermostat allows hot water sanitization

Glass-Lined Tank with Two Anode Rods

- Provides maximum protection against corrosion

2" Thick (R-16) Foam Insulation for High Energy-Efficiency

Durable Brass Tamper-Resistant Drain Valve

Factory-Installed Temperature and Pressure (T&P) Relief Valve

Certified to UL 174 for Electric Water Heaters

- Additional code compliance: CEC, CABO, HUD, BOCA National Codes, ASHRAE/IES 90.1-1999 and 2004 NAECA

3-Year Limited Tank Warranty, 1-Year Limited Parts Warranty

- Consult written warranty or contact State Water Heaters for complete information

For Additional Technical Information,
PHONE 800-365-0024

STATE WATER HEATERS
500 Tennessee Waltz Parkway, Ashland City, TN 37015
www.statewaterheaters.com



SELECT[®] DAIRY BARN



Self-Cleaning Electric Water Heater


MODEL NUMBER	FIRST HOUR RATING (GALLONS)	GALLON CAPACITY	STANDARD ELEMENT WATTAGE* 240 VAC	RECOVERY 90°F RISE GALLONS PER HOUR	R VALUE	DIMENSIONS IN INCHES			APPROX. SHIPPING WEIGHT
						A	B	C	
PE 82 20DT	86	80	4500	21	16	67-1/2	60	24	210

Inlet and outlet connections: 3/4"

Single-element models not available on dairy barn models.

This model uses 1" screw-in elements.

*Maximum element wattage 6000 watts

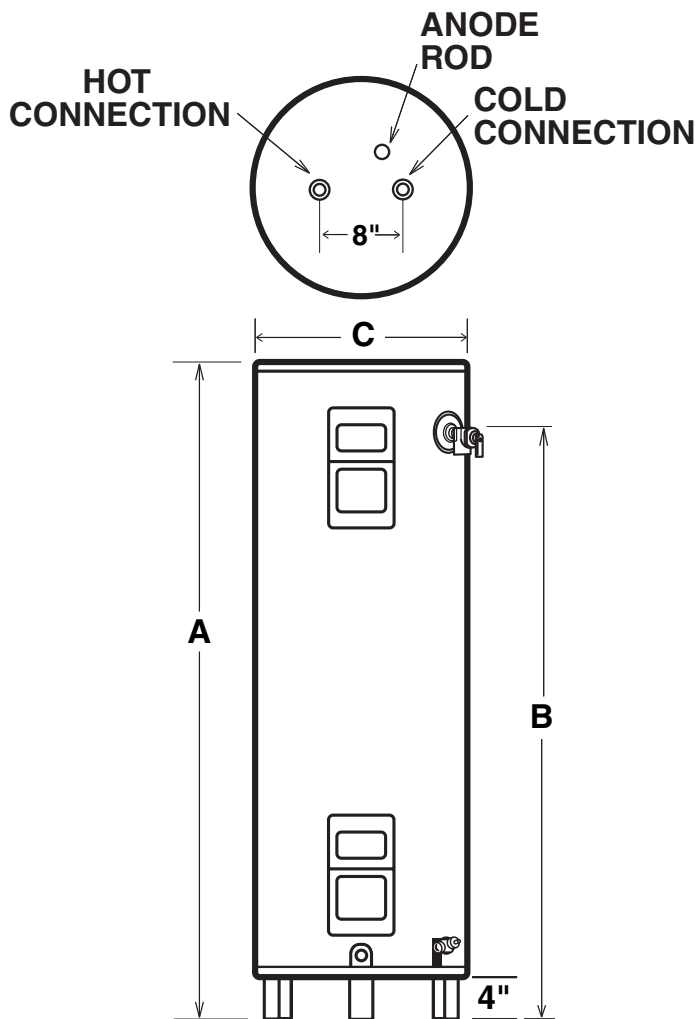

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

For Additional Technical Information,
PHONE 800-365-0024

STATE WATER HEATERS
500 Tennessee Waltz Parkway, Ashland City, TN 37015
www.statewaterheaters.com



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>