


## **ELECTRIC DOWNDRAFT COOKTOP**

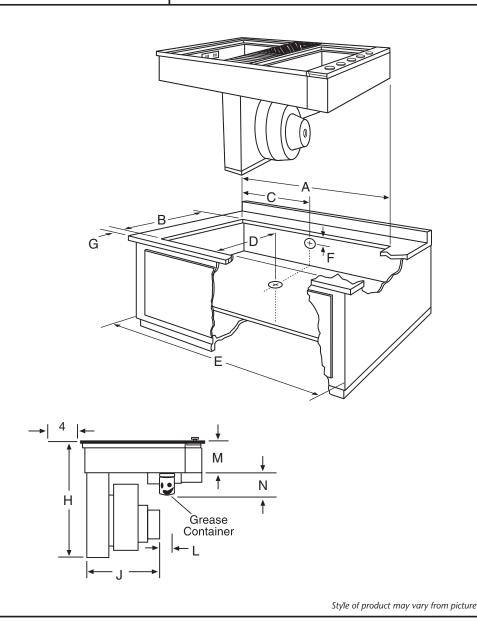

#### PRODUCT DIMENSIONS

	INCHES	CENTIMETERS
Α	18 <sup>11</sup> / <sub>16</sub> ± <sup>1</sup> / <sub>16</sub>	47.5 ± .1
В	20 <sup>9</sup> /16 ± <sup>1</sup> /16	52.2 ± .1
O	6 <sup>5</sup> /16	16.0
D	<b>14</b> <sup>7</sup> /16	36.7
Е	21	53.3
F	8	20.3
G	2 1/8	5.4
Н	<b>17</b> <sup>1</sup> /2 min	44.5
J	12 <sup>1</sup> /2	31.8
$L^2$	2	5.1
М	4 3/4	12.1
N <sup>3</sup>	6 <sup>1</sup> /4	15.9

### **MODEL SKUs**

CVEX4100B CVEX4100W


### **NOTES:**

- 1. Where possible, 6" (15.2 cm) is recommended for motor blower service. Minimum clearance of 1" (2.5 cm) is required to sidewalls and 3/4" (1.9cm) to rear wall.
- 2. Provide 2" minimum (5.1 cm) cabinet clearance to motor for cooling purpose.
- 3. Provide 6 1/4" min (15.9 cm) required for removal of (supplied) grease container(s). Installed dimension for (supplied) grease container(s) is 5 1/2" (14.0 cm)
- 4. Grills installed near a side wall must allow a minimum clearance of 6" (15.2 cm) between cooktop and side wall for maximum performance.
- 5. Vents up to 60 equivalent feet.
- 6. This appliance has been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194° F. If these appliances are installed with cabinets that have a lower working temperature than 194° F, discoloration, delamination or melting may occur.

**Electrical requirements:** Provide for 120/240 or 120/208 VAC, 60 Hz. The unit must be properly circuitprotected and wired according to local electrical codes.



# DOUBLE GAS COOKTOP WITH SINGLE ELECTRIC COOKTOP

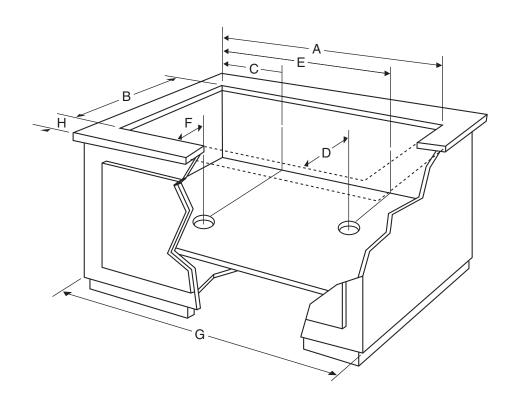

### PRODUCT DIMENSIONS

	INCHES	CENTIMETERS
Α	52 <sup>15</sup> /16	134.5
В	20 <sup>9</sup> /16	52.2
С	6 <sup>5</sup> /16	6.3
D	<b>14</b> <sup>7</sup> /16	36.7
Е	38 <sup>3</sup> / <sub>4</sub>	98.4
F	6 <sup>1</sup> /16	20.3
G	55	139.7
H <sup>1</sup>	2 1/4	5.7

### **MODEL SKUs**

CVGX2423B - CVEX4100B CVGX2423S - CVEX4100S CVGX2423W - CVEX4100W

Style of product may vary from picture

### **NOTES:**

- 1. Minimum on all sides.
- 2. This arrangement requires Trim Support Bracket A0918.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com