


ELECTRIC DOWNDRAFT COOKTOP

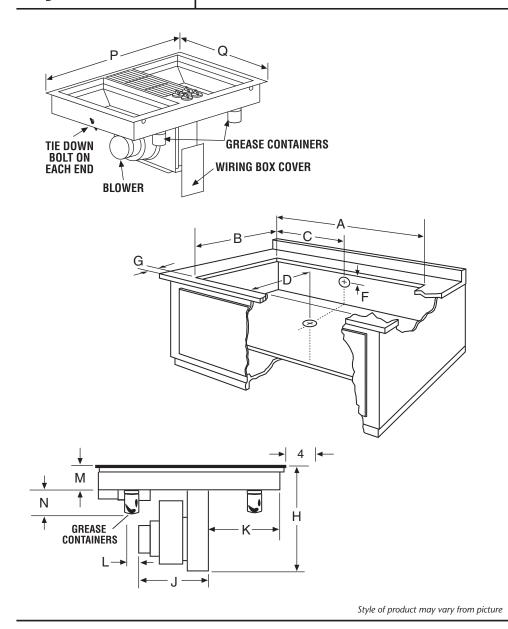

PRODUCT DIMENSIONS

	INCHES	CENTIMETERS
Α	29 ± 1/16	73.7 ±.2
В	21 ± ¹ / ₁₆	53.3 ±.2
С	9 3/8	23.8
D	7 ⁹ /16	19.2
F	13	33.0
G	1 ⁷ /8 min	4.8 min
Н	13 ¹³ /16 min	34.8 min
J	13 ³ /4	34.9
K	11 ¹³ /16	30.0
L ²	2 min	5.1 min
М	3 1/2	8.9
N ³	6 ¹ /4 min	15.9 min
Р	30	76.2
Q	21 ³ /4	55.2

MODEL SKUs

JED8130ADB JED8130ADW

NOTES:

- 1. Where possible, 6" (15.2 cm) is recommended for motor blower service. Minimum clearance of 1" (2.5 cm) is required to sidewalls and 3/4" (1.9cm) to rear wall.
- 2. Provide 2" minimum (5.1 cm) cabinet clearance to motor for cooling purpose.
- 3. Provide 6 1/4" minimum (15.9 cm) required for removal of (supplied) grease container(s). Installed dimension for (supplied) grease container(s) is 5 1/2" (14.0 cm)
- 4. Grills installed near a side wall must allow a minimum clearance of 6" (15.2 cm) between cooktop and side wall for maximum performance.
- 5. Vents up to 60 equivalent feet.
- 6. This appliance has been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194° F. If these appliances are installed with cabinets that have a lower working temperature than 194° F, discoloration, delamination or melting may occur.

Electrical requirements: Provide for 120/240 or 120/208 VAC, 60 Hz. The unit must be properly circuitprotected and wired according to local electrical codes.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com