# KitchenAid Bottom Mount Refrigerator

#### PRODUCT MODEL NUMBERS

KBFC42FT	KBLS36FT
KBFO42FT	KBRC36FT
KBLC36FT	KBRO36FT
KBLO36FT	KBRS36FT


Electrical: A 115 Volt, 60 Hz., AC only 15- or 20amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Supply: A cold water supply with water pressure of between 30 and 120 psi (207 - 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 - 414 kPa).

Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F.


### **CABINET OPENING DIMENSIONS**

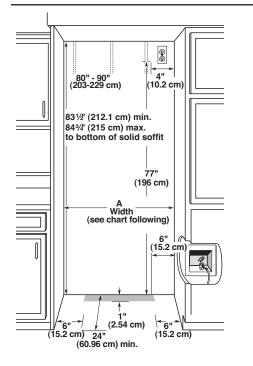


Model	Width A (as shown above)
36	35½" (90.2 cm)
42	41½" (105.4 cm)

**NOTE:** Flooring under refrigerator must be at same level as room.

## **OVERALL DIMENSIONS**




- Height dimensions are shown with the leveling legs extended to 1/8" (3 mm) below the rollers.
- The power cord is 84" (213 cm) long.

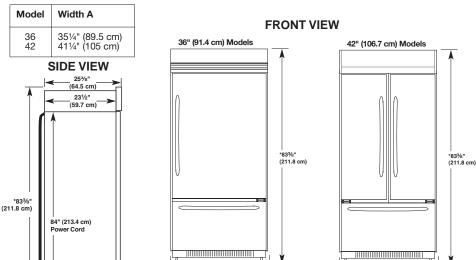

When leveling legs are fully extended to 11/4" (3.2 cm) below rollers, add 11/8" (2.9 cm) to the height dimensions.

\*3½" (8.9 cm)

## DOOR SWING DIMENSIONS

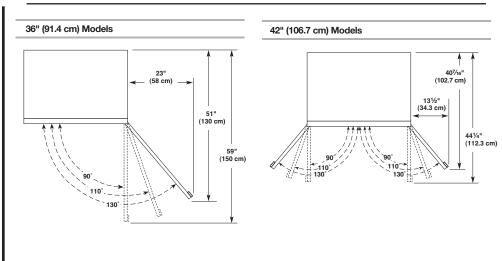

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com