

SM6/P

Dual Channel Preamplifier

Owners Manual





Perreaux Industries Limited makes no warranty for the use of its products, other than those expressly contained in the warranty detailed herein. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change products or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Perreaux are granted by the Company in connection with the sale of Perreaux products, expressly or by implication.

PERREAUX[®] is a registered trademark of Perreaux Industries Ltd.

Terms and product names in this document may be trademarks of others.



This page has intentionally been left blank.



Introducing the Perreaux SM6 Preamplifier

Congratulations on your Perreaux SM6 purchase. To realise the full potential of your unit you need to appreciate all aspects of its operation.

Before installing the SM6 into your system, read the entire manual carefully. Endeavor to understand every detail by familiarising yourself with the controls and features as you read. You will find it easier to install using the relevant sections of this manual as a reference.

We have attempted to explain every feature and operation facet clearly and concisely. Your Perreaux dealer will be happy to assist if you encounter any unforeseen problems.

Read this manual, install your unit correctly and realise the sonic significance of your investment in Perreaux.

Perreaux products are designed to provide the utmost in sonic realism and electronic reliability with a functional yet elegant appearance that reflects the care and craftsmanship applied during all stages of construction.

Features at a Glance

- Rugged build quality
- Truly balanced circuit design
- Discrete Class A amplification throughout
- Multiple regulated power supplies
- Wireless full function remote control
- Precision volume control
- Dual preamplifier outputs
- Advanced PCB design and earthing techniques

To maintain the consistently high quality that you expect from us, and we expect from ourselves, Perreaux products are essentially handcrafted.

We maintain the human-link throughout, from design and construction, through to the ultimate test, your music, your system, your ears.

Because we too listen to our products, we know that with your Perreaux you will discover many more of the musical secrets we strive to reveal.

Note:

All references to the SM6 Classic series are also applicable to the SM6P P-Series product.

From all of us at Perreaux Industries Limited, thank you for choosing the Perreaux Reference Series SM6 preamplifier.

ii

Important Safety Instructions

Note: All safety and operation instructions should be read carefully before the SM6 is operated. Keep the Owners Manual in a safe place for future reference.

- The SM6 should not be used near water, for example near a bathtub, kitchen sink, in a wet basement, near a swimming pool, etc.
- The SM6 should be rack mounted only in a heavy-duty rack or stand that is recommended for audio equipment use.
- Mounting to a wall or ceiling should be via a heavy-duty bracket or shelf designed for audio equipment use.
- The SM6 should be situated away from heat sources such as radiators, stoves, or other appliances that produce excessive amounts of heat.
- DO NOT place the SM6 directly onto carpeted surfaces.
- Avoid exposing the SM6 to extremely high or low temperatures.
- The SM6 should be connected to a mains power supply only of the type described in the operating instructions, or as marked on the rear of the unit.
- DO NOT disconnect the mains earth from the system.
- The mains power supply cord should be routed so that it is not likely to be walked on or pinched by items placed on or against it.
- The power cord of the SM6 should be unplugged from the mains outlet when the unit is to be left unused for long periods or when attempting to connect or disconnect cables and before cleaning your unit.
- Care should be taken so that objects and/or liquids do not accidentally fall inside the SM6.
- Please keep electrical equipment out of reach of children.
- Please unplug sensitive electronic equipment during electrical storms.
- Please replace any fuse with the value and type specified.
- Avoid operating the SM6 with the cover removed.
- DO NOT bypass any fuse.
- DO NOT attempt to repair the SM6. In the event of a problem, please contact your Perreaux dealer.
- DO NOT operate this product in an explosive atmosphere.



iii

Table of Contents

i	Introducing the Perreaux SM6 Preamplifier	4
ii	Important Safety Instructions.....	5
iii	Table of Contents.....	6
1	Unpacking and Placement.....	7
2	Instant Install	8
3	Front Panel Functions.....	10
4	Rear Panel Functions	11
5	Remote Control Functions	15
6	Special Design Philosophies	17
7	Special Design Features.....	19
8	Maximising System Potential.....	20
9	Care and Maintenance	22
10	Warranty Information and Obtaining Service	23
11	Extended Warranty Registration Form	24
12	Faultfinding Your System	25
13	Specifications.....	30
14	Physical Dimensions.....	33
15	Contact Details	34

1

Unpacking and Placement

Unpacking Procedure

The SM6 is packaged for maximum protection. Please carefully read the instructions below before proceeding to unpack the unit. Be extremely careful.

- Inspect both ends of the cardboard box and open at the end without the central staple by slitting the reinforced tape at either side.
- Fold back the flaps and tip the package on end and the inner box will slide out.
- Lay the inner box down flat and upright, open it conventionally by separating the top tray from the bottom.
- The product can now be removed from the bottom packaging. This will be easier if you have someone to help you by holding the base of the box.
- Alternately, the bottom tray and preamplifier could be tipped upside down and the bottom packaging removed. If opened in this manner, please ensure that you turn the contents over again.

Note: Be very careful to secure the unit if you are planning to flip the package upside down.

- Remove the two white polystyrene protectors off either side of the unit, leaving the black material covering.
- Pull back the material and remove the protective black tissue from the front panel.

The preamplifier is now unpacked and ready for further installation.

Note: Please retain all packaging material for future transport.

Box Contents

- 1 x SM6 Preamplifier
- 1 x SM6 Product manual
- 1 x Perreux remote control
- 2 x AAA batteries
- 1 x Detachable AC power cord

Placing Your SM6

The SM6 should generally be placed close to your amplifier, keeping the interconnect cabling short. Position all the separate components of your system close enough to your SM6 to avoid having to stretch or extend any of the interconnect cables.

As a “rule of thumb”, allow 80-100mm (3-4 inches) around all sides of the product and mount the SM6 on a flat surface, ensuring that the unit has adequate access to free flowing air.

Do not place auxiliary equipment directly on top of the SM6.

Please do not cover the product with a cloth or similar.

If you are like us, the first thing you will want to do is to play your favourite piece of music through your new SM6. The following instructions are written to enable you to achieve this as quickly as possible. These are not comprehensive instructions, but are designed to enable you to play music now!

Note: Please take the time to read the SM6 manual thoroughly as it incorporates many features, which will enhance its operation.

Placement

The SM6 is a reference preamplifier and best results will be achieved when placed on a solid surface with adequate ventilation. DO NOT place on a carpeted floor or cover the preamplifier!

Turn off associated components

This minimises the potential to damage any other components when connecting your SM6 into the system.

Connect SM6 to power amplifier

Connect the balanced (XLR) or unbalanced (RCA) outputs of your SM6 to the appropriate inputs at the rear of your power amplifier.

Note: Try to keep all interconnect cables as far from loudspeaker cables as possible and well away from all AC mains leads.

Connect source component to SM6

Connect the relevant output of your source component to either the balanced (XLR) or unbalanced (RCA) inputs of your SM6.

Note: Be sure to set the balanced CD input switch to the appropriate position, ON if using the balanced (XLR) inputs and OFF if using the unbalanced (RCA) inputs.

Switch on source component

Turn on the source component and make sure you have some program material ready to play.

Switch on SM6

After checking the supply voltage compatibility with the voltage rating on the SM6 rear panel, insert the power cord-set supplied into the rear of the unit and into the wall. Switch on the socket at the wall and power up the SM6 using the switch on the rear panel.

Switch on power amplifier

Turn on your power amplifier.

Test for undesirable noises

Without any program source material, slowly increase the SM6 volume listening for any undesirable noises. After establishing that there are no problems, return the SM6 volume level back to zero.

Play your source material

Start your source material playing.

Increase the volume


Slowly increase the volume on the SM6 to achieve a comfortable listening level.

CONGRATULATIONS!

Now that you have achieved your first objective, sit back, relax and please read the rest of the manual at your own pace, in your favourite armchair, whilst sipping a hot cup of coffee. You'll find the whole experience much more pleasurable whilst listening to music.

3

Front Panel Functions

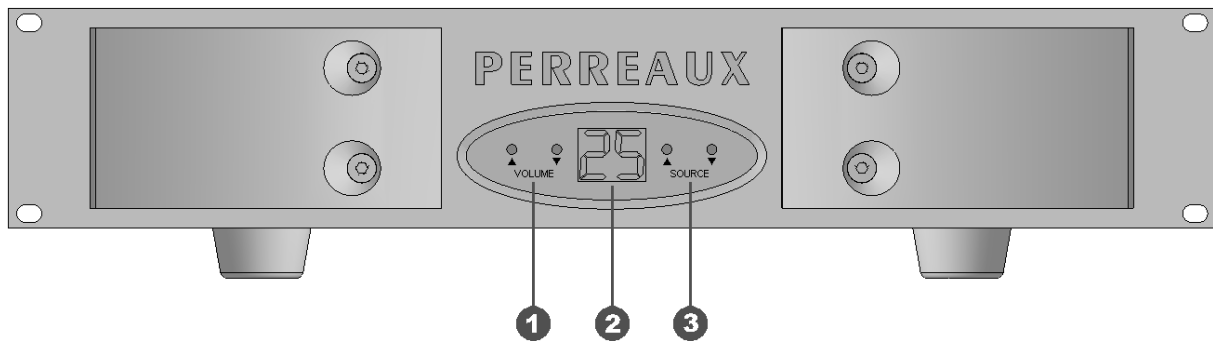

1 Volume Control

When depressed, these buttons will alter the volume setting. The volume adjustment range is 00 – 59.

2 Alphanumeric Display

The display will illuminate when the power is turned on at the mains power switch or when various remote or front panel adjustments are made. At turn-on, the display will illuminate with 00 and default to the CD input. If no commands are selected within two minutes, the display will revert to the standby mode displaying a red dot only to indicate power is still on.

3 Source Select

When depressed, these buttons select the desired source input.


The order of source inputs and display indication is as follows:

Source Input	Display
Compact Disc	Cd
Tuner	TU
Auxiliary	AX
Laser Disc	Ld
VCR	VR
Tape	TA

Note: The source selector has six positions and supplies the chosen source to the Main/Balanced outputs and VCR/Tape outputs. If the VCR or Tape source is selected no signal is supplied to its applicable output to avoid the potentially damaging feed back loop which can occur if inadvertently attempting to record and playback the same source simultaneously.

4

Rear Panel Functions

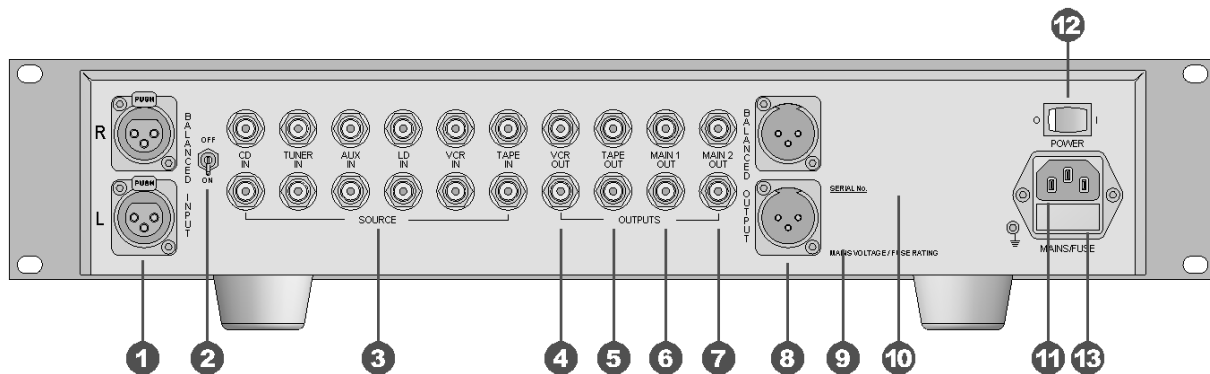

Caution! Observe precautions regarding volume control settings. Please make all changes at minimum volume setting. Only increase the volume after the connections have been made.

1 Balanced CD Inputs

Accepts a signal from a CD player with balanced outputs via high quality XLR connectors. The use of good quality balanced line cable into the balanced input cause the input signal to be relatively immune to noise and external effects caused by the use of long interconnect cables, helps reduce hum loop noise and aids in the cancellation of distortion products.

The pin assignments of the balanced XLR input connectors are as follows:



Pin 1: Signal ground
 Pin 2: Signal + (non-inverting)
 Pin 3: Signal - (inverting)
 Shield ground: Chassis ground

Note: Please refer to the operating manuals of your balanced output line level source to verify that the pin assignments of the output connectors correspond to the SM6 balanced inputs. In the event that they are not compatible, the interconnecting cable will need to be altered to suit.

2 Balanced CD Input Switch

This switch selects which input to use for the CD source input. Set to ON if using the balanced (XLR) inputs and OFF if using the unbalanced (RCA) inputs.

Note: Do not connect source equipment to both the balanced and unbalanced CD inputs at any one time.

Note: The position of the Balanced CD Input switch has no bearing on the balanced output, it only selects which CD input to use. Set the balanced CD input switch to ON only when using the balanced CD input.

Refer to Chapter 13 “Specifications”, for detail on input sensitivity and impedance.

3 Unbalanced Source Inputs

Accepts a standard single-ended input (RCA) from source components with single-ended analogue outputs. These high quality gold plated sockets are highly conductive, corrosion resistant, and provide less potential for corrosion induced distortion.

Refer to Chapter 13 “Specifications”, for detail on input sensitivity and impedance.

4 VCR Line Outputs

This single-ended (RCA) output will provide a line level audio signal, suitable for recording, from the selected source input. This output is disconnected when the VCR source input is selected; to prevent any potentially damaging feedback loops.

5 Tape Line Outputs

This single-ended (RCA) output will provide a line level audio signal, suitable for recording, from the selected source input. This output is disconnected when the Tape source input is selected; to prevent any potentially damaging feedback loops.

6 Main Output 1

This single-ended (RCA) output is commonly referred to as “Preamp Out”. It will provide the audio signal required to drive virtually any amplifier to full power.

7 Main Output 2

This single-ended (RCA) output is wired in parallel with Main Output 1 and is useful for supplying signal to another amplifier if bi-amping.

8 Balanced Outputs

This balanced (XLR) preamplifier output provides the signal required to drive virtually any power amplifier equipped with a balanced input. Connection should be made with high quality cables fitted with XLR connectors.

Note: The position of the balanced CD input switch has no bearing on the balanced output; it only selects which CD input to use. It is not necessary to set this switch to ON when using the balanced outputs.

The pin assignments of the balanced XLR output connectors are as follows:



Pin 1: Signal ground
 Pin 2: Signal + (non-inverting)
 Pin 3: Signal - (inverting)
 Shield ground: Chassis ground

Caution!

Please refer to the operating manual of your amplifier to verify that the pin assignments of the input connectors correspond to the SM6 balanced outputs. In the event that they are not compatible, the interconnecting cable will need to be altered to suit.

9 Input Voltage and Fuse Rating

Input Voltage

It is important that the SM6 be operated from the correct AC mains voltage. This unit is factory set for the voltage applicable to the original country of destination.

The SM6 will operate satisfactorily within a voltage variation of up to $\pm 5\%$ of that voltage at which the unit has been set.

If you require the voltage setting to be altered, e.g. relocation to another area, city or country, or extraordinarily high or low voltages, please contact your Perreaux dealer. Qualified service personnel can only perform this modification.

Caution!

Never attempt to connect the unit to the incorrect voltage. Severe damage can result from applying incorrect voltage to the unit.

Fuse Rating

The fuse rating displayed here, refers to the rating of the mains inlet fuse.

For more information on fuse ratings, please refer to Chapter 13 "Specifications".

Caution!

Never replace the fuse with any other ratings other than the one specified.

10 Serial Number

The serial number is unique to your SM6. Please record this number and store it in a safe place. For any service related enquiry, please be prepared to quote the product serial number to Perreaux personnel or their service representative.

11 AC Mains Input

An IEC-standard mains input is provided at the rear of the unit. The AC cord set is removable, allowing you to upgrade to a cord set of your preference.

Caution!

Prior to connection to the AC mains, please check the voltage label on the rear panel to ensure that your unit conforms to the power supply in your area. Never attempt to connect the unit to the incorrect voltage. Severe damage can result from applying incorrect voltage to the unit.

12 Power Switch

Depress this switch to the right (I) to turn power ON. Mute relay circuitry is employed in the SM6 and output is muted for 1 to 2 second after the power switch is actuated. Depress this switch to the left (O) to turn the SM6 off at which time the outputs will be disconnected.

The SM6 resets the volume to minimum and balance to centre at turn-on.

13 AC Mains Fuse

The SM6 is equipped with a user serviceable AC mains fuse. In the event of fuse failure, always replace with the same type and value fuse. Remember, fuses do not usually blow without a reason. Any doubts about fuse failure should be conveyed directly to your Perreux dealer.

For more information on fuse ratings, please refer to Chapter 13 "Specifications".

Caution!

This is the ONLY user accessible fuse.

Never replace the fuses with any other ratings other than the one specified on the rear panel.


Always ensure your SM6 is disconnected from the mains supply before attempting to change the mains fuse.

5

Remote Control Functions

The SM6 comes supplied with a 29 button Perreaux Universal infrared remote control.

The remote control uses 2 x AAA batteries and may be changed by sliding forward the plastic cover located on the bottom of the remote.


Note: Press the red  button on the remote to select the code-set required to control the SM6.

The SM6 uses the following functions:

Mute

Depressing this control causes minimum volume to be selected. The display will indicate "MU" until any front panel or remote control button is actuated, or the mute button is depressed again at which stage volume will be returned to the previous setting.

Note: After one minute, the SM6 will enter standby mode and volume will be set to zero. The display will revert to a red dot, indicating standby.

The mute control has a 'punch through' function and will operate regardless of the code-set selected i.e. you can be operating the CD player remote functions and still use the mute control without selecting the  button first.

Display

Pressing this button will cause the display to revert to the standby indication (one red dot) and is intended for use if the light of the display is distracting (for instance in a darkened room). Depressing any key will cause the display to revert to its normal operation.

Balance Left / **Balance Right**

The balance controls allow you to vary the level of either the Left or Right channel to obtain the correct stereo balance for your listening position. Pushing the Balance Left button will cause the level of the right channel to be attenuated (decreased in volume). Pushing the Balance Right button will cause the level of the left channel to be attenuated.

During any balance adjustment the display will indicate the direction of adjustment, left or right, with an "L" or an "R" followed by a number indicating the level of adjustment. The range is L1-L9 and R1-R9. "LR" on the display indicates the balance is centred. Pushing either button will initially cause the display to indicate the current balance position.

Note: Balance settings are not stored, should the SM6 be turned off at the mains power switch.

 **Tuner Source Select**

Depressing this control selects the Tuner source input and the relevant code-set. The Tuner input is indicated by “TU” on the display of the SM6.

 **Compact Disc Source Select**

Depressing this control selects the Compact Disc source input and the relevant code-set. The Compact Disc input is indicated by “Cd” on the display of the SM6.

 **Tape Source Select**

Depressing this control selects the Tape source input. The Tape input is indicated by “TA” on the display of the SM6.

 **VCR Source Select**

Depressing this control selects the VCR source input. The VCR input is indicated by “VR” on the display of the SM6.

 **Laser Disc Source Select**

Depressing this control selects the Laser Disc source input. The Laser Disc input is indicated by “Ld” on the display of the SM6.

 **Auxiliary Source Select**


Depressing this control selects the Auxiliary source input. The Auxiliary input is indicated by “AX” on the display of the SM6.

 **Volume Up**

Depressing this button increases the volume.

 **Volume Down**

Depressing this button decreases the volume.

Note: The Volume control has a ‘punch through’ function and will operate regardless of the code-set selected i.e. You can be operating the CD player remote functions and still use the volume controls without selecting the  button first.

6

Special Design Philosophies

Minimalist Design

Perreaux has been designing and manufacturing only the highest quality audio componentry for more than a quarter of a century. Technology has continued to evolve rapidly over that time and our knowledge and application of design, materials and manufacturing techniques has advanced in tandem with this. Today's Perreaux range comes closer to fulfilling our shared vision than at any other time in the past.

To follow is a discussion on some of Perreaux design philosophies that have been incorporated into the entire range.

Leading British architect, John Pawson, writes:

“The Minimum can be defined as the perfection that an object achieves when it is no longer possible to improve it by subtraction. This is the quality that an object has when every component, every detail, and every junction has been reduced or condensed to the essentials. It is the result of the omission of the inessentials”.

Perreaux has historically embraced the minimalist ethic from an audio design perspective only. The concept of “less equating to more” has been at the heart of all Perreaux audio designs for more than a quarter of a century.

Minimalist Electronics

We wish to maximise the quality of your listening pleasure by keeping the componentry and signal path as uncluttered, short and clean possible. All components in the signal path, even those of the highest quality have an effect on the signal, thereby altering the quality of the reproduction in some way. Our aim is to recreate in its entirety, the original performance by not adding or subtracting anything, irrespective of the source.

Minimalist User Interface

We carefully study the user interface and par down the number of buttons and associated clutter leaving just the essential and no more. How tempting it has been over the years to loose sight of our core values as technology or trends have made it possible. That is one of the reasons why our older products still have such a high resale value today. The user interface has and always will remain simple, free from adornments, clean and uncluttered.

Minimalist Aesthetics

Our products appeal to those who seek the ultimate in audio exclusivity, namely the perfect blend of “form and function”.

“Form and function” are both tough masters. That is why our amplifier heat sinks are not hidden, but instead feature prominently in all our designs. We make no excuses for producing some of the most distinctive high-end audio products on the planet. We let “form and function” blend together in perfect harmony. This surely is the essence of true minimalist utilisation.

Minimalism in a Wider Context

John Pawson writes:

“Clearly simplicity has dimensions to it that go beyond the purely aesthetic: it can be seen as the reflection of some innate, inner quality, or the pursuit of philosophical or literary insight into the nature of harmony, reason, and truth”.

7

Special Design Features

Rugged Build Quality	Mechanical strength has been a hallmark of Perreaux products since the company first started production back in 1974. The concept behind the physical design and construction is that each structural member should contribute to both rigidity and performance.
Balanced Design	The SM6 is a truly balanced preamplifier, from input to output. The positive and negative halves of the signal never touch, remaining balanced throughout all stages. This circuit topology offers the ultimate in performance, providing increased noise rejection and lower levels of distortion.
Class A Output	Four discrete output stages operating in Class A provide output buffering. This enables low impedance loads to be driven, over long cable lengths using any cable.
Multiple Power Supplies	There is a separate power supply for each section of the preamplifier. One for each of the volume control chips (two chips are used to keep the system fully balanced and therefore, to maintain separation, each chip is supplied with it's own separate power supply), another one for each of the output buffering stages (once again because the SM6 utilises a fully balanced circuit topology), another for the digital logic and the final power supply looks after the input relays. The advantage of this is that there is complete isolation from stage to stage. The digital noise is kept completely out. This is further evidence of a thoroughly designed product offering.
Wireless Remote Control	Many audiophile grade components are still provided with analogue controls that are adjusted on the faceplate of the unit. While total control from the remote is common practice in standard products, and so it should be on all products, it is not yet widely utilised on many high-end systems. Obvious advantage is that you don't have to get out of your chair to make an adjustment. Some of the functions available are: mute, volume up/down, display on/off, input select and balance.
Earthing	Perreaux engineers pay particular attention to designing the product to ensure maximum separation between internal signal and power earths, only meeting at a central starred point.
Precision Volume Control	The SM6 uses two digitally controlled resistor ladder volume controls. This is because we treat the positive and negative parts of the signal separately (true balanced topology). The advantages of using a digitally controlled analogue resistor ladder to adjust volume are precise control, no contacts to corrode creating wiper noise and no analogue component drift.
Dual Outputs	You do not need to purchase an RCA style splitter if you want to drive two separate power amps simultaneously, as there are dual parallel preamplifier outputs.

8

Maximising System Potential

Interconnects and Speaker Cables

An often-ignored area in high fidelity systems is the cabling connecting the various components. Interconnect leads should be high quality cable with substantial terminations. Gold plate is inherently resistant to corrosion, and an excellent conductor. The presence of corrosion induces distortion and poor conductivity will seriously interfere with sound quality. Terminations must plug snugly into sockets to maintain maximum conductivity and to avoid annoying earthing problems.

Speaker cabling is equally critical. Use only solidly constructed cable of high purity copper or silver content. Again, gold plated terminations are recommended, of the spade or banana plug type. Use cables of equal length and as short as possible to maintain uniform electrical resistance at the lowest possible level. If your amplifier is closer to one of your speakers than the other, avoid coiling the longer lead as this can create inductance, with the potential of reduced high frequency performance. Keep all connections clean, firm and tight. The traditional adage that a chain is only as strong as its weakest link most certainly applies to audio systems.

Bi-amping

Bi-amping uses two similarly powered amplifiers, with exactly the same input sensitivity so that, when the same input signal is provided to each of them, the output level will be exactly the same. This can often be done with one power amplifier connected to the tweeters and another to the woofers, as it spreads the power requirement between the two amplifiers. Bi-amping can achieve greater control, dynamics and resolution than if you try to run everything from a single stereo amplifier.

Balanced Interconnects

The use of the balanced signal inputs and outputs can have the effect of cleaning up hums, buzzes, radio frequency interference (RFI) and general extraneous rubbish that can enter an audio system. A balanced signal input system operates on the principle of differential amplification. The positive and negative inputs are contrasted against one another and the difference between them is amplified. Noise entering the system is imposed equally on the positive and negative signals and therefore will not be amplified, as no differential voltage exists.

The term used to describe the quality of the effect is called Common Mode Rejection Ratio (CMRR). CMRR is an equipment and system specification, which describes how well unwanted common mode signals are counteracted when used in conjunction with balanced connections. CMRR action prevents the egress and build up of extraneous hum; buzzes and RFI when analogue signals are conveyed down cables and between equipment powered from different locations and is widely used in professional audio applications.

The rejection ratio achieved is described in minus dB. The CMRR of a system follows the formula $20\text{Log}(V_{\text{output}}/V_{\text{input}})$. In other words a CMRR of -40dB means that all garbage entering the unit will be made 100 times smaller. The piece of equipment with poorest CMRR will effectively determine the hum and RFI level of the system. Effectively the weakest link in the chain. Highest quality audio systems should quote a CMRR figure of -80dB or better.

**Positioning
Ancillary
Equipment**

Positioning of your source equipment (tuner, video, disc, tape, record, decks) is important. To avoid airborne frequency peaks, place them well away from your loudspeakers and not in the corners of your listening area.

**Loudspeaker
Placement**

Loudspeaker placement is a controversial issue; suffice to say that room corners are generally the worst situation. Everything which constitutes your listening area, including the materials used in its construction, will affect the sound itself and the sound stage created. Equally, you have to live with your system and therefore compromises will have to be made in line with your particular priorities. The best advice we can give concerning the choice of loudspeakers is, establish clearly in your mind your requirements; listen to many makes and models, and if at all possible audition your preferred choice in your own listening area and trust your own ears.

**Matching
Amplifier and
Speaker
Ratings**

When matching speakers to amplifier wattage – ordinarily, the amplifier should have a continuous RMS output power rating the same as or higher than the speakers at the same impedance rating. For example, $100W_{\text{RMS}}$, 8Ω speakers driven by a $100W_{\text{RMS}}$ at 8Ω amplifier is not as ideal as $100W_{\text{RMS}}$, 8Ω speakers driven by a $160W_{\text{RMS}}$ at 8Ω amplifier.

Note:

100 Watts is twice as loud as 10 Watts, not ten times as loud.

Perreux equipment is designed with substantial headroom built in – that is, the reserve necessary to reproduce musical peaks without clipping.

**Final
Thoughts**

High fidelity systems are an investment deserving of careful thought and personal time. Your preferences, priorities and constraints will dictate the parameters of your purchase, your ears will tell you what is the right choice for you. Our experience tells us that the bitterness of dissatisfaction lingers long after the fragrance of cheap price is forgotten, hence our use of the term – investment.

9

Care and Maintenance

The SM6 has been designed to provide many years of trouble free enjoyment. It is important to keep the exterior of the unit clean.

Note: Please switch the unit off and remove the cord-set from the rear of the amplifier before attempting to clean your SM6 in the manner described below.

Never apply liquid directly to the SM6.

Never use abrasives.

Never rub in a circular motion.

Cover The cover features a durable, high quality powder-coat finish. To remove finger marks and dirt, lightly rub the surface with a soft cloth.

If the dirt is not removed, dip your cloth in a mild solution of soap and water, squeeze excess moisture from it and then gently reapply to the surface.

Stubborn dirt may be removed by the application of a small quantity of methylated spirits, applied directly to the cleaning cloth only and reworking the effected area.

Front Panel The front panels differ between the Classic Series (*SM6*) and P Series (*SM6P*). The Classic Series front panel is finished in chrome electroplate, where as the P-Series is finished in the same durable powder coat as the cover.

They both can be cleaned in a similar manner to the cover, as described above.

10

Warranty Information and Obtaining Service

1 Year Limited Warranty

The Perreaux SM6 is warranted to be free from defects in material and workmanship under normal use to the original purchaser for a period of 1-year (365) days from the date of purchase from an authorised dealer or distributor.

5 Year Extended Warranty

To extend the warranty on your Perreaux SM6 to five (5) years from date of purchase, please return a fully completed warranty registration form along with a copy of the original receipt of purchase to:

Perreaux Industries Ltd
PO Box 47413
Ponsonby
Auckland
New Zealand

For the Extended Warranty Registration Form, please refer to Chapter 11.

Warranty Transfer

Perreaux Industries Ltd may, at its discretion, allow the warranty on this product to be transferred. Please contact Perreaux on info@perreaux.com requesting a transfer.

Information on the SM6 Warranty

If during the warranty period the Perreaux SM6 exhibits defects in materials and/or workmanship, it will be repaired or replaced, at our option, without charge for either parts or labour. The warranty does not apply to any unit that has been misused, abused or altered.

Any unit that is not performing satisfactorily may be returned to the factory in Auckland, New Zealand for evaluation. Return authorisation must first be obtained by either calling or writing to Perreaux prior to shipping the unit. Perreaux Industries Ltd and its authorised distributors and dealers shall not be held liable for any freight or insurance charges. Freight and insurance charges to and from the Perreaux factory will be the sole responsibility of the owner of the unit.

There is no other express warranty on the SM6. Neither this warranty nor any other warranty, express or implied, including any implied warranties of merchantability of fitness, shall extend beyond the warranty period. No responsibility is assumed for any incidental or consequential damages.

Obtaining Service

In the event that you are experiencing difficulty with the SM6, please as a first step, follow the faultfinding procedures in Chapter 12. If after following this procedure, you require further assistance, please contact your Perreaux dealer.



1 1

Extended Warranty Registration Form

Please complete this form and either fax, mail or scan and e-mail it to Perreux Industries Ltd.

Fax: +64 9 815 5981

Mail: Perreux Industries Ltd
PO Box 47 413
Ponsonby
Auckland
New Zealand

E-mail: info@perreux.com

Alternatively, complete the online Warranty Registration Form on our website
– www.perreux.com.



5 Year Extended Warranty Form



Name:

Address:

Suburb:

City:

Country:

Telephone:

E-mail:

Website:

Product Purchased:

Serial Number:

Dealer:

Purchase Date:
d d / m m / y y y y

12

Faultfinding Your System

Cause and Elimination of Hum

Hum is a particularly annoying form of noise in any high fidelity system and at some time has been experienced by many of us.

Hum may result from a number of different situations and to make matters worse maybe caused by a seemingly illogical combination of circumstances.

One or more of three specific causes creates hum in the system.

Induced Hum

Hum can be induced into the system from one or more sources and is generally associated with the radiation of noise from one system into another.

Hum and noise can be radiated from any object or system involving AC voltage and current such as power supplies in amplifiers, motors, switching equipment etc. All of these may be found in your hi-fi system or within your own home.

Hum may be induced into any part of the system, so there are no specific instructions that can be given which will offer a guaranteed cure. A good practice to adopt is to keep low-level signal equipment such as phono systems, tuners etc. well away from high-level signal equipment such as power amplifiers. Alternatively, careful designs must be employed to negate these effects on low-level signal equipment. Another good practice to adopt is to keep all signal leads away from power leads.

The practice of neatly tying excess leads together for a tidy looking installation should be resisted, as this could be the cause of induced hum in the system.

Earth Loops

Earth loops are a particularly annoying cause of hum in the system. Earth loops are created by mains frequency current flowing in the screen of signal leads and becomes apparent with the lack of adequate earthing between the various pieces of equipment making up the hi-fi system. This is further compounded by the fact that the equipment earthing considerations vary between different manufacturers and countries.

Perreux products used with equipment manufactured by other manufacturers may cause an earth loop situation, but Perreux products used with other Perreux products will not cause an earth loop situation provided the following precautions are observed:

- The entire hi-fi system must be connected to the same mains/line power outlet. This will ensure that each piece of the system shares the same earth or ground. This rule applies to all installations of all brands of equipment. A preamplifier or power amplifier may be operated from an extension cord plugged into the same mains/line outlet.

- When a piece of equipment is supplied with a three pin mains/line supply lead all three pins must be connected in the correct fashion - see your dealer if in doubt.
- Check all interconnecting signal leads for good connections, both internal connections and firm contact with the sockets. While the centre pin may make firm contact, it is very important that the outer contact is also firm.
- Never remove the earth/ground wire from the mains/line supply of any piece of equipment. This could be hazardous.

Broken Earth Connections

This is a common cause of hum and noise in the system. In many instances, the only way to eliminate the possibility of hum problems arising through a broken earth connection somewhere in the system is to physically check every connection.

Identifying and Isolating Problems

When experiencing a problem, such as one channel not working, or a noise in one channel, it is good practice to adopt a method of isolating the problem to a specific item or area. This practice will assist in diagnosing, curing, or at least advising your technician of the problem and result in a saving of time, money and perhaps frustration.

A logical approach to isolating the probable cause of the problem is to start at the loudspeakers and work back to the music source, eliminating each piece of equipment in turn.


Caution!

Observe precautions regarding volume control settings. Please make all changes at minimum volume setting. Only increase the volume after the connections have been made.


Check that the entire system is connected in the proper manner and that the mains/line supply is connected and switched on.

For clarity during this section, we have labeled one loudspeaker 'A' and the other loudspeaker 'B'. In this example, loudspeaker 'A' appears faulty.

Initial system connections

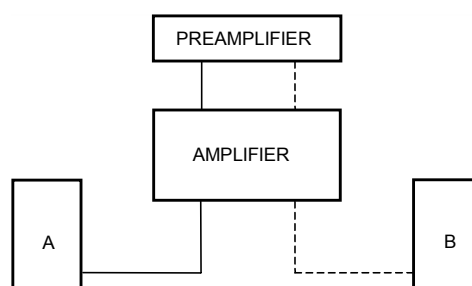


Step 1 – Loudspeakers

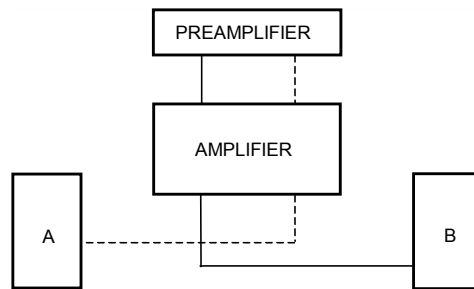

Change the loudspeaker leads from one loudspeaker to the other. If the fault remains in loudspeaker 'A', then loudspeaker 'A' is at fault, go no further.

If the fault now appears in loudspeaker 'B' then the problem lies further up the line. Move on to step 2.

Step 2 – Loudspeaker Leads

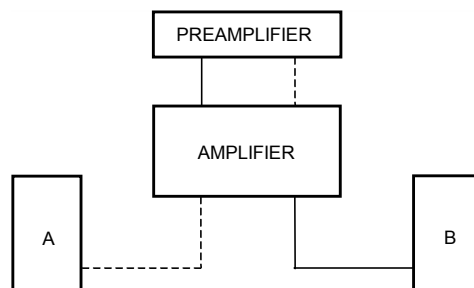


Change the loudspeaker leads completely from left channel to right and from right channel to left by now swapping them at the amplifier output. If the fault now appears in loudspeaker 'B', then that loudspeaker lead is at fault, go no further.

If the fault appears in loudspeaker 'A' then loudspeaker leads are OK. Move on to step 3.

Caution!

Restore the loudspeaker leads to their original connections at both ends.

Step 3a – Inputs (Channels)

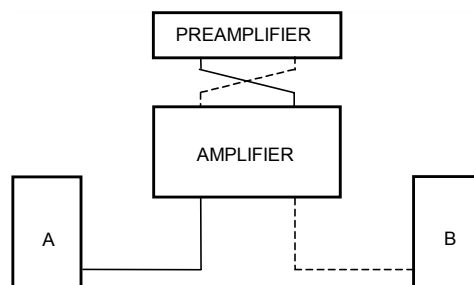


Change the input plugs on the rear of your amplifier, as follows: Change each input source in turn by swapping the plugs left to right and right to left. If the fault changes to loudspeaker 'B' on any one of the selected inputs, then that particular input source is possibly at fault. Move on to step 3b.

If the fault stays in loudspeaker 'A', then it is probable that the fault may exist within the amplifier.

Caution:

Changing of any connectors must be carried out at a minimum volume setting. Only increase the volume after the connections have been changed.

Step 3b – Inputs (Interconnects)

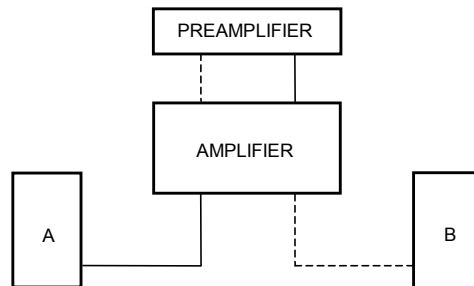

Change the interconnect leads completely from left channel to right and from right channel to left by now swapping them at the source component's output. If the fault stays in loudspeaker 'B', then the interconnect lead is at fault, go no further.

If the fault appears in loudspeaker 'A', then the interconnect lead is OK.


Caution!

Changing of any connectors must be carried out at a minimum volume setting. Only increase the volume after the connections have been changed.

Should the fault prove to be in the amplifier it will be necessary to determine where the fault actually lies. Most of this has been done, for instance, you now know what input/s and what channel is affected. This information will assist your Perreux dealer or service person when or if any service is required.

If the apparent fault is noise in one or both channels and has been localised to the amplifier, it will be necessary to determine whether or not the noise increases with the volume control; whether or not the noise exists when no input at all is connected to the amplifier; and what type of sound the noise is. For example, low frequency humming noise or high frequency hissing noise. This information will also assist your service person in making repairs or adjustments.

Faultfinding Flowchart

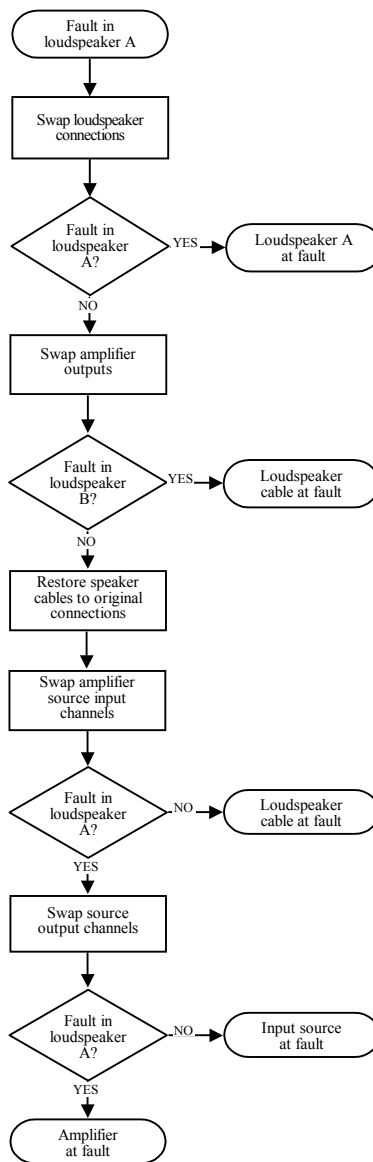

The SM6 specifications are detailed in brief and then subsequently in more detail. In the detailed version, we attempt to explain the significance of each specification.

The correlation between published specifications and sonic quality can be unreliable. A list of numbers reveals virtually nothing. All technical measurements must be subject to qualitative as well as quantitative interpretation. Measurements of the SM6 reveal excellent results by any standards. Tested at 115V and 230V after a 10 minute warm up period.

Specifications In Brief

Rated Output	
Unbalanced:	1.5V _{RMS}
Balanced:	1.5V _{RMS}
Maximum Output	
Unbalanced:	3.0V _{RMS}
Balanced:	6.0V _{RMS}
Total Harmonic Distortion (THD+N)	
Rated Output:	<0.004%, 20Hz – 20kHz
Frequency Response:	10Hz – 60kHz, +0dB –0.15dB
Signal to Noise ratio (rated output)	
Unbalanced:	100dB
Balanced:	100dB
Dynamic Range:	116dB
Input Impedance	
Unbalanced:	10kΩ
Balanced:	20kΩ
Input Sensitivity	
Unbalanced:	215mV
Balanced:	215mV
Input Overload	
Unbalanced:	3.8V _{RMS}
Balanced:	7.6V _{RMS}
Phase Accuracy:	±0.5°, 20Hz – 20kHz
Power Consumption:	50W
Audio Connections	
Audio Inputs	
Unbalanced:	6 pairs RCA connectors
Balanced:	1 pair XLR connectors
Audio Outputs	
Unbalanced:	2 pairs RCA preamp level
.....	2 pairs RCA line level
Balanced:	1 pair XLR preamp level

Other Connections

1 x IEC AC mains input receptacle

Mains Input Voltage

100V, 110V, 120V, 220V, 230V or 240V AC at 50Hz or 60Hz

(Set within the SM6 at time of manufacture)

Dimensions

Width 482mm (19.0")
 Height 88mm (3.5")
 Depth 315mm (12.4")
(not including feet, terminals and handles)

Fuse Ratings

Mains input fuse

100 – 125V: 2SB slow blow 0.5A

200 – 250V: 2SB slow blow 0.5A
(user serviceable)

Internal DC rail fuses..... 2 x 2AG normal blow 0.5A
(NOT user serviceable)

Weight

Net: 7.7kg (17.0lb)

Gross: 10.7kg (23.6lb)

Specifications Explained

Rated Output..... 1.5V_{RMS}

The SM6 has been designed to drive any amplifier to its full potential. Even with an input level from a source component with a low level output, the SM6 has enough gain to provide the amplifier with an optimum signal, utilising the full dynamic range and signal to noise specifications of the amplifier.

Maximum Output..... 3.0V_{RMS}

The maximum output level of the SM6 has been designed to provide substantial headroom allowing greater dynamics without clipping, handling any musical transients with finesse and ease.

Total Harmonic Distortion (THD+N) <0.004%, 20Hz to 20kHz

Total Harmonic Distortion + Noise is the percentage of output signal which is made up of frequencies added due to harmonics of the fundamental frequency and noise. By using a truly balanced circuit topology throughout the SM6 and maintaining Class A operation at all stages, Perreux engineers have kept this figure to a minimum.

Frequency Response 10Hz to 60kHz, +0dB -0.15dB

This is the “standard” specification with which everyone is familiar. Actually, “frequency response” is a misnomer: technically, it should be called “amplitude response versus frequency” for it describes how uniform the amplitude or strength of signals of various frequencies is maintained. It is generally thought that a difference of 1dB is the least that can be perceived by ear, the SM6 is specified almost seven times higher, thus exceeding the audible range of the human ear.

Signal to Noise Ratio (*unweighted*)..... 100dB

The ratio of desired signal to noise signals present in the output. The balanced circuit topology of the SM6 provides the foundation for high noise rejection. This figure is referenced to the rated output of the SM6, taking into full account all potentially annoying hum components.

Dynamic Range 116dB

Dynamic Range is the difference between the loudest and quietest portions of a signal. Due to CD formats 96dB dynamic range limit, the SM6 provides more than enough dynamic range to cope with any musical transients the CD format can throw at it.

Input Impedance..... 10k Ω

The resistance “load” that is presented to the component that is driving it. The high value indicates that the preamplifier will not load down the output of most high quality source components.

Input Sensitivity..... 215mV

Indicates the amount of input voltage required to drive the unit to its rated output. Due to the gain setup of the SM6, it is able to achieve its rated output even from the lowest of input levels.

Input Overload..... 3.8V_{RMS}


Input Overload specifies the maximum signal level that each input circuit can handle without overloading the preamplifier circuitry and sending it into clipping.

Phase Accuracy..... $\pm 0.5^\circ$, 20Hz – 20kHz

Shows the maximum amount of phase difference at any point across the frequency range 20Hz to 20kHz.

14

Physical Dimensions

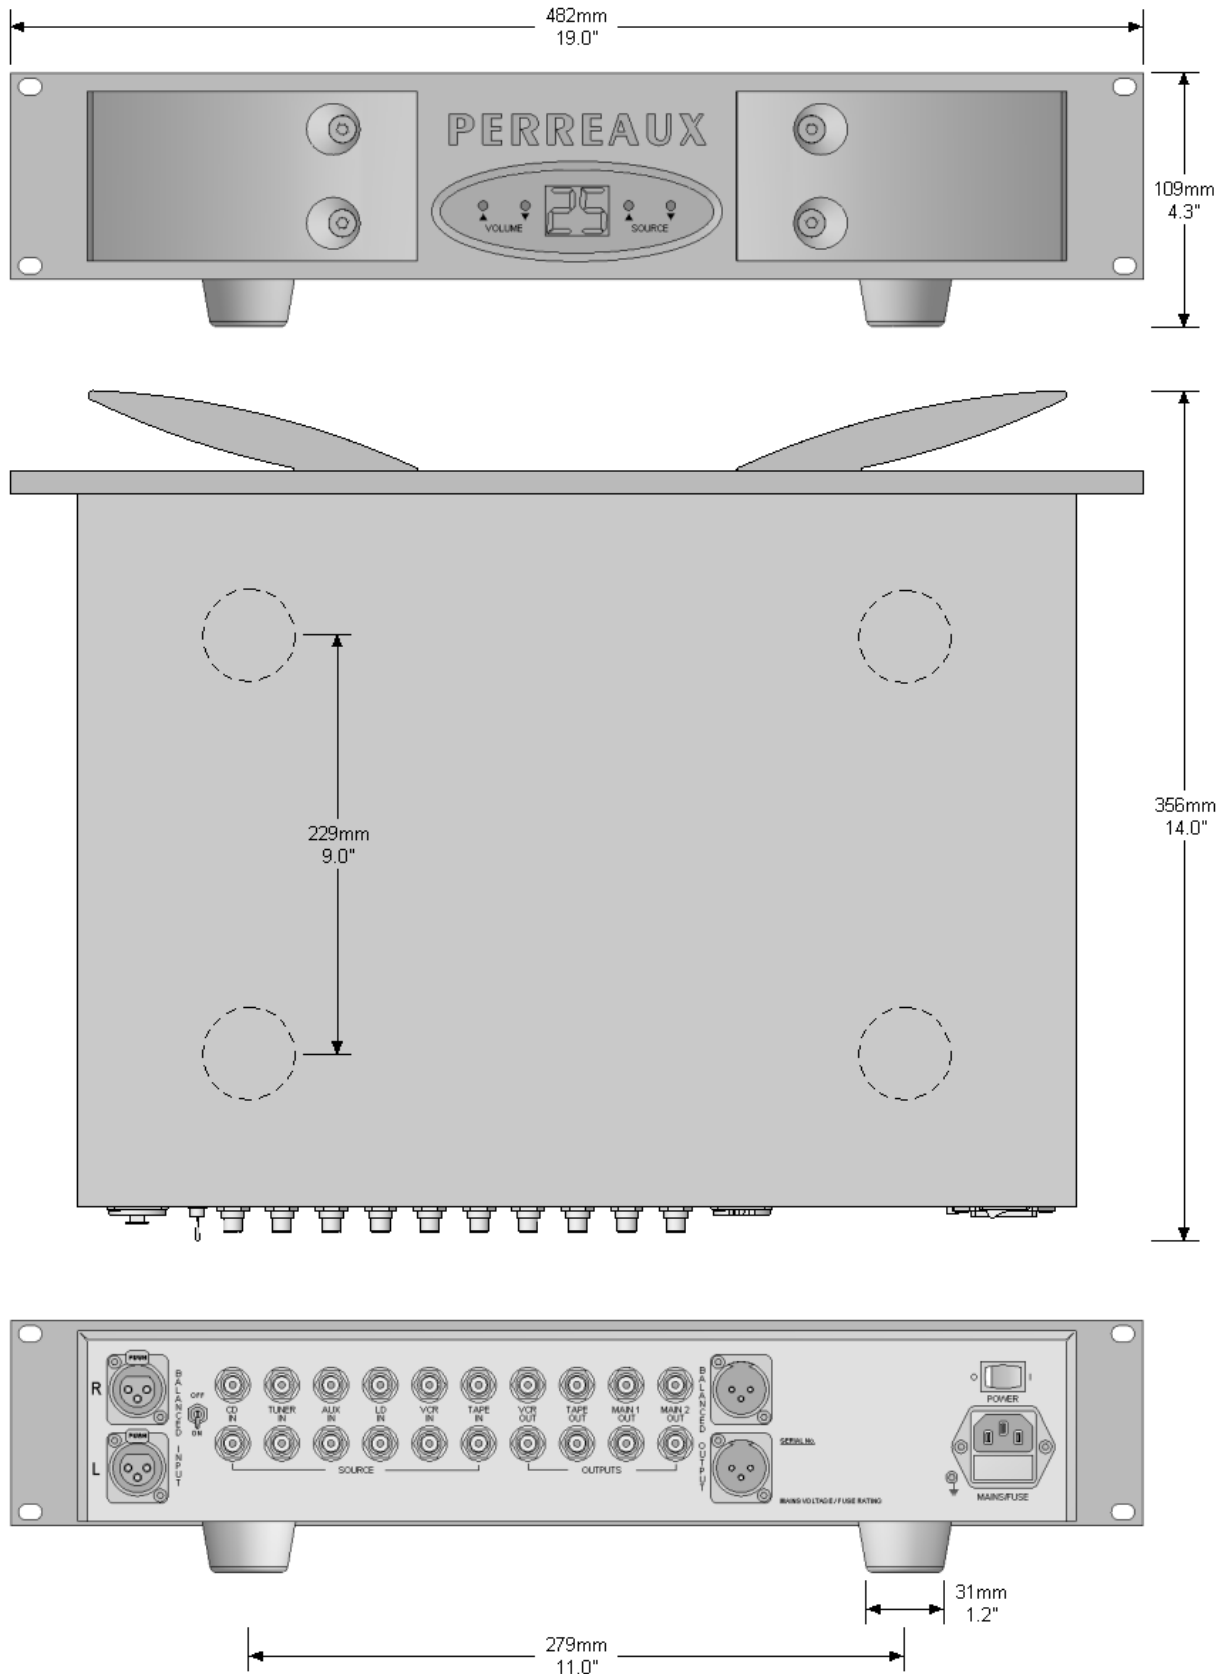



15

Contact Details

For more information please contact your Perreaux dealer, or contact:

Perreaux Industries Ltd
PO Box 47 413
Ponsonby
Auckland
New Zealand

Ph: +64 9 815-5452
Fax: +64 9 815-5981

E-mail: info@perreaux.com

Internet: www.perreaux.com



Installation Notes

A series of horizontal lines for writing installation notes, starting from a vertical line on the left and extending across the page.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>