
# Economical and Reliable Source for Industrial Equipment

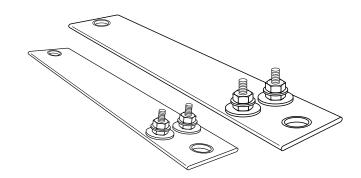

The Watlow mica strip heater is an economical and reliable source of heat for industrial equipment. A mere 15 mils (0.4 mm) thick mica insulator on both sides of the resistance element provides complete electrical insulation and offers little resistance to efficient heat flow. Plus mica withstands high voltage spikes, resists moisture and is inert to most chemicals. UL® component recognition is available for applications to 900°F (480°C) sheath temperature, file number E52951.

# **Performance Capabilities**

- Sheath temperatures to 900°F (480°C) on zinc-coated units
- Sheath temperatures of 1200°F (650°C) on stainless steel units
- Watt densities to 55 W/in<sup>2</sup> (8.5 W/cm<sup>2</sup>)
- Maximum voltage 480V~(ac)

# **Applications**

- · Vulcanizing presses
- Sealing equipment
- · Hot plates
- · Hot stamping
- · Dies and molds
- Thermoforming
- Tin melting
- · Packaging equipment
- · Food warming equipment

# **Features and Benefits**

#### Low mass construction

· Heats up fast to provide quick response to control input

#### Flat resistance ribbon

 Heat is generated over a broad area; this design solution puts the heat source closer to the work

#### Rust-resistant, zinc-coated steel sheath

· Material gives the heater rigidity and improves emissivity

#### Optional stainless steel sheath

Available for more corrosive atmosphere

## Nickel-plated steel terminal posts

 Posts are securely riveted to ensure a positive,trouble-free connection to the resistance circuit

#### Computer-aided design engineering

 Design combination of ribbon gauge, total wattage and winding spacing maximizes heat transfer and life of the heater

# **Excellent dielectric strength guaranteed**

· All incoming mica receives a quality control inspection



12001 Lackland Road St. Louis, Missouri 63146 USA Phone: (314) 878-4600 FAX: (314) 878-6814

Internet: www.watlow.com e-mail: info@watlow.com

UL® is a registered trademark of Underwriter's Laboratories, Inc.

# MICA STRIP HEATERS

## **Terminations**

Types 1 through 6, as illustrated, show the placement of terminals for Watlow mica strip heaters. However, please note Type 3 terminals are not available on stock units. Placement is specified in terms of length, width and center-to-center dimensions. These dimensions are as follows:

#### Length:

Min: Type 1, 2, 3: 2 inches (50.8 mm) Min: Type 4, 5, 6: 5½ inches (139.7 mm)

Max:  $96^{\circ}$  inches (2438.4 mm) Tolerance:  $\pm \frac{1}{6}$  inch (1.6 mm)

#### Width:

Min: Type 1, 2, 4, 5:  $\frac{1}{2}$  inches (15.8 mm) Min: Type 3, 6:  $\frac{1}{2}$  inches (38.1 mm)

Max: 15 inches (381 mm) Tolerance:  $\pm \frac{1}{16}$  inch (1.6 mm)

#### Thickness:

Nominal: % inch (4.7 mm)

Types 4, 5 and 6 have % inch x % inch (9.5 mm x 6.3 mm) mounting slots. Letters A, B and C, called out in the illustrations, denote the following: A = width, B = overall length, and C = center-to-center dimensions on mounting slots.

<sup>®</sup> Consult the factory if you need to exceed 96 inches (2438.4 mm).

# **Ordering Information**

Please consult the Watlow Heaters catalog for specifics.


To order your stock mica heater, specify:

- Quantity
- · Watlow code number


# **Availability**

- Stock: Same day shipment
- Made-to-Order: If stock units do not meet application needs, Watlow can manufacture mica strip heaters to meet special requirements. Please consult a Watlow sales engineer or authorized distributor.


#### Type 1—Opposite Ends



# Type 3—Parallel Made-to-Order




#### Type 5—Tandem with Holes




#### Type 2—Tandem



# Type 4—Opposite Ends with Holes



#### Type 6—Parallel with Holes



Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com